

**CLEPA proposal for text for the new paragraph 4.9 to replace that as proposed in
TRANS/WP.29/GRSP/16/Rev. 2**

4.9 ISOFIX Marking

If the product includes ISOFIX attachments, the following information must be permanently visible to someone installing the restraint in a vehicle:


- The ISO ISOFIX logo followed by the letter(s) that is/are appropriate for the ISOFIX size class into which the product fits. As a minimum, a symbol consisting of a circle with a diameter of minimum 13 mm and containing a pictogram, the pictogram shall contrast with the background of the circle. The pictogram shall be clearly visible either by means of contrast colours or by adequate relief if it is moulded or embossed.



B, C and F

The following information may be conveyed by pictograms and/or text. The marking must indicate:

- The essential relevant steps needed for making the seat ready for installation. For example, the method of extending the ISOFIX latch system must be explained.
- The position, function, and interpretation of any indicator must be explained
- The position and if necessary the routing of top tethers, or other means of limiting seat rotation requiring action by the user, must be indicated using the following symbol.

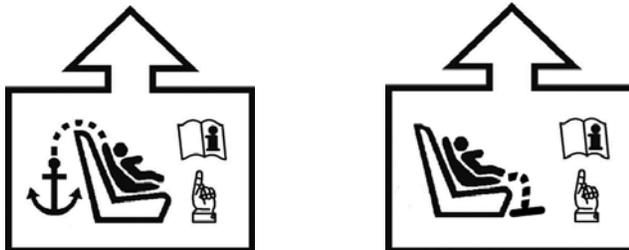

- The adjustment of ISOFIX latches and the top tether, or other means of limiting seat rotation, requiring action of the user must be indicated.
- The marking must be permanently attached and be visible to a user installing the seat. *
- Where necessary reference should be made to the child restraint User Instructions and to the location of that document using the symbol below.

