



**Economic and Social
Council**

Distr.
GENERAL

TRANS/WP.15/AC.1/94/Add.5
10 November 2003

ENGLISH
ORIGINAL : ENGLISH AND FRENCH

ECONOMIC COMMISSION FOR EUROPE

INLAND TRANSPORT COMMITTEE

Working Party on the Transport of Dangerous Goods

Joint Meeting of the RID Safety Committee and the
Working Party on the Transport of Dangerous Goods

REPORT OF THE SESSION*

held in Geneva from 1st to 10 September 2003 and in Bonn from 13 to 17 October 2003

Addendum 5

Annex 1 (cont'd.)

Proposals of amendments of RID/ADR/ADN adopted by the Joint Meeting in 2003 (cont'd)

Proposals of amendments to Part 5 of RID/ADR/ADN

* Circulated by the Central Office for International Carriage by Rail (OCTI) under the symbol OCTI/RID/GT-III/2003-B/Add.5.


PART 5

Chapter 5.1

- 5.1.2.1 (a) Insert "the word "OVERPACK", " after "shall be marked with".
- 5.1.2.2 Insert the following sentence after "applicable provisions of RID/ADR/ADN":
"The "overpack" marking is an indication of compliance with this requirement.".
- 5.1.5.1.2 (f) Delete "special form" before "approval".

Chapter 5.2

- 5.2.1.7.4 (a) Replace "an Industrial package Type 1", " an Industrial package Type 2" and " an Industrial package Type 3" with " a Type IP-1 package", " a Type IP-2 package" and "a Type IP-3 package" respectively.
- (c) Replace "an Industrial package Type 2, an Industrial package Type 3" with " a Type IP-2 package, a Type IP-3 package".
- 5.2.2.1.6 Amend the beginning of this paragraph to read: "Except as provided in 5.2.2.2.1.2, each label shall:"
- 5.2.2.2.1.1 Add the following sentence at the end: "For receptacles intended for the carriage of refrigerated liquefied gases the standard format of A7 (74 x 105 mm) may also be used.".
- 5.2.2.2.1.6 c) Amend as follows:
"(c) labels conforming to model No. 2.1 displayed on cylinders and gas cartridges for gases of UN Nos. 1011, 1075, 1965 and 1978, where they may be shown in the background colour of the receptacle if adequate contrast is provided.".
- 5.2.2.2.2 The first amendment does not apply to the English version.
Amend model No. 11 to read as follows:

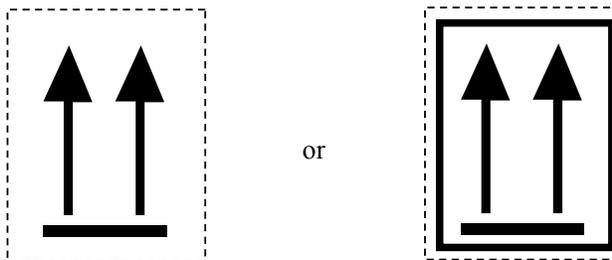

Two black or red arrows on white
or suitable contrasting background

Chapter 5.3

- 5.3.2.1.1 (RID only) Insert a new indent to read:
"- wagons and containers carrying packaged radioactive material with a single UN number under exclusive use and no other dangerous goods."
- 5.3.2.1.4 (ADR and ADN) In the first sentence, insert "or packaged radioactive material with a single UN number under exclusive use and no other dangerous goods" after "dangerous solid substances in bulk". At the end of the last sentence, add "or for the packaged radioactive material carried under exclusive use in the transport unit or in the container".
- 5.3.2.2.1 Replace "not less than" with "of" before "30 cm".
Replace "not more than" with "of" before "15 mm".
- 5.3.2.2.1 (ADR only) Insert the following text after the first sentence:
"The orange-coloured plates may be separated in their middle with a black horizontal line of 15 mm thickness."
- 5.3.2.2.3 In the example, delete "Min." before "30 cm".
- 5.3.2.2.4 Insert the following new paragraph:
"5.3.2.2.4 The permitted tolerances for dimensions specified in this sub-section are $\pm 10\%$."
- 5.3.2.3.2 Delete hazard identification numbers 72, 723, 73, 74, 75 and 76.

Chapter 5.4

- 5.4.1.1.1 (c) Amend the second indent to read:
"- for radioactive material of class 7: the Class number: "7"."
- Add the following text to the end of the third indent of 5.4.1.1.1 (c) of RID/ADR:
"For substances and articles for which no label model is given in Column (5) of Table A in Chapter 3.2, their class according to Column (3a) shall be given instead."
- 5.4.1.1.1 (d) Add the following NOTE:
"NOTE: For radioactive material of Class 7 with subsidiary risks, see sub-paragraph (b) of special provision 172 in Chapter 3.3."
- 5.4.1.1.1 (f) Amend as follows:
"(f) with the exception of empty means of containment, uncleaned, the total quantity ..." (remainder unchanged).
- 5.4.1.1.6 Amend 5.4.1.1.6 to read:
"5.4.1.1.6 *Special provision for empty means of containment*
- 5.4.1.1.6.1 For empty packagings, uncleaned, which contain the residue of dangerous goods of classes other than Class 7, the description in the [consignment note/transport document] shall be:

"EMPTY PACKAGING", "EMPTY RECEPTACLE", "EMPTY IBC", "EMPTY LARGE PACKAGING", as appropriate, followed by the information of the goods last loaded, as described in 5.4.1.1.1 (c).

See example as follows: "EMPTY PACKAGING, 6.1 (3)".

This provision is applicable to empty uncleaned receptacles for gases with a capacity of not more than 1000 litres.

5.4.1.1.6.2 For empty means of containment other than packagings, uncleaned, which contain the residue of dangerous goods of classes other than Class 7, the description in the [consignment note/transport document] shall be:

"EMPTY TANK VEHICLE", ["EMPTY TANK WAGON"] [RID], "EMPTY DEMOUNTABLE TANK", "EMPTY TANK CONTAINER", "EMPTY PORTABLE TANK", "EMPTY BATTERY-VEHICLE", ["EMPTY BATTERY-WAGON"] [RID], "EMPTY MEGC", "EMPTY VEHICLE", ["EMPTY WAGON"] [RID], "EMPTY CONTAINER", followed by the words "last load" together with the information of the goods last loaded, as prescribed in 5.4.1.1.1 (a) to (d) [and (j)][RID] in one of the sequences as prescribed.

See example as follows:

[RID] "EMPTY TANK-WAGON, LAST LOAD: 663 UN 1098 ALLYLALCOHOL, 6.1(3), I" or "EMPTY TANK-WAGON, LAST LOAD: ALLYLALCOHOL, 6.1(3), 663, UN 1098, I"

[ADR] "EMPTY TANK-VEHICLE, LAST LOAD: UN 1098 ALLYLALCOHOL, 6.1(3), I" or "EMPTY TANK-VEHICLE, LAST LOAD: ALLYLALCOHOL, 6.1(3), UN 1098, I"

This provision is also applicable to empty uncleaned gas receptacles with a capacity of more than 1000 litres."

5.4.1.1.6.3 [Last sentence of existing 5.4.1.1.6, unchanged].

5.4.1.1.17 Add a new paragraph to read as follows:

"5.4.1.1.17 *Special provisions for the carriage of solids in bulk containers conforming to 6.11.4*

When solid substances are carried in bulk containers conforming to 6.11.4, the following statement shall be shown on the transport document (see NOTE at the beginning of 6.11.4.6):

"Bulk container BK(x) approved by the competent authority of...".

5.4.1.2.2 b) Replace "4.1.6.5" with "4.1.6.10" twice.

5.4.1.2.5 Amend the title to read: "*Additional provisions for Class 7*".

5.4.1.2.5 Amend to read:

"5.4.1.2.5.1 The following information shall be inserted in the transport document for each consignment of Class 7 material, as applicable, in the order given and immediately after the information required under 5.4.1.1.1 (a) to (c)".

Delete sub-paragraphs (a) to (c).
Renumber sub-paragraphs (d) to (m) as (a) to (j).

5.4.1.2.5.1 (b) (Previous (e)) Add the following sentence at the end: "For radioactive material with a subsidiary risk, see last sentence of special provision 172."

5.4.1.2.5.1 (h) (Previous (k)) Amend to read as follows:

"(h) For consignments of more than one package, the information required in 5.4.1.1.1 and in (a) to (j) above shall be given for each package. For packages in an overpack, container, or wagon/vehicle/conveyance, a detailed statement of the contents of each package within the overpack, container, or wagon/vehicle/conveyance and, where appropriate, of each overpack, container, or wagon/vehicle/conveyance shall be included. If packages are to be removed from the overpack, container, or wagon/vehicle/conveyance at a point of intermediate unloading, appropriate transport documents shall be made available;"

CHAPTER 5.5

5.5.1 Delete "in risk groups 3 and 4".

5.5.1.2 Replace the text with "*Reserved*".
