



**Economic and Social
Council**

Distr.
GENERAL

TRANS/WP.29/977
9 February 2004

ENGLISH
Original: ENGLISH AND FRENCH

ECONOMIC COMMISSION FOR EUROPE

INLAND TRANSPORT COMMITTEE

World Forum for Harmonization of Vehicle Regulations (WP.29)

**DRAFT SUPPLEMENT 6 TO THE 01 SERIES OF AMENDMENTS
TO REGULATION No. 52**

(Small capacity passenger vehicles, M2 and M3 category)

Note: The text reproduced below was adopted by the Administrative Committee (AC.1) of the amended 1958 Agreement at its twenty-fifth session, following the recommendation by WP.29 at its one-hundred-and-thirty-first session. It is based on document TRANS/WP.29/2003/68, as amended (TRANS/WP.29/953, para. 119).

Paragraph 5.6.10.9., amend to read:

"5.6.10.9. When the passenger door is opened, the retractable step shall be securely held in the extended position. When a mass of 136 kg is placed in the centre of a single step or a mass of 272 kg is placed in the centre of a double step the deflection at any point on the step, measured relative to the body of vehicle, shall not exceed 10 mm."

Paragraph 5.7.8.1.3.2., amend to read:


"5.7.8.1.3.2. Intrusion of a structural member provided that the intrusion is included within a triangle whose peak is situated 70 cm from the top and whose base 10 cm in width and situated in the upper part of the space in question, adjacent to the side wall of the vehicle (see annex 3, figure 7)."

Annex 3, figure 7., amend to read:

"Figure 7

Permitted intrusion of a structural member

(see paragraph 5.7.8.1.3.2.)

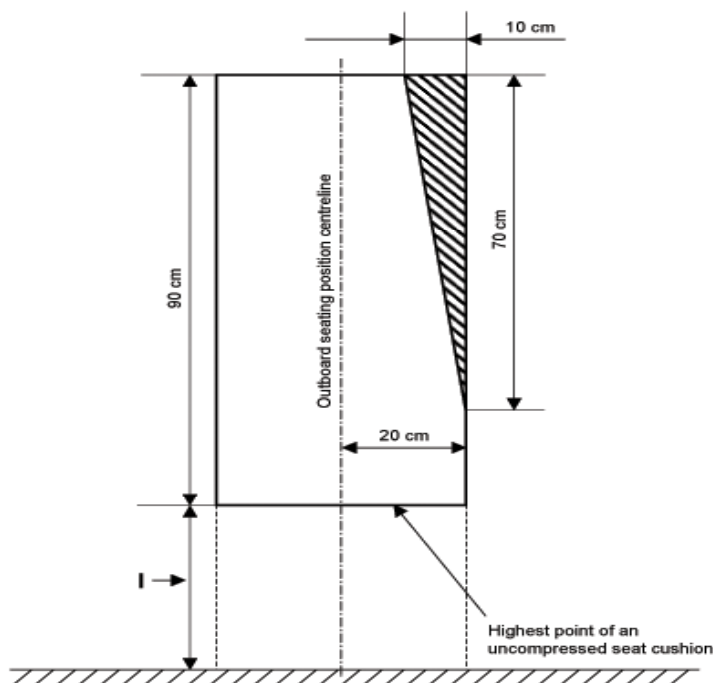

1 (cm) min.
40-50
(35 cm at wheel arches and engine compartment)

"