

Amendments to document TRANS-WP29-GRRF-58-inf12e resulting from discussions at the 11th October 2005 meeting in London and addition work subsequent to the meeting to bring the second (trailer) part of the document in line with the first (motor vehicle) part and add in document EVSC05-35 Rev 1.

Meeting additions in red and underlined, deletions in red with a double strike through.

Changes subsequent to the meeting in blue.

Proposed amendments to ECE Regulation No. 13,

Explanatory Note – this document has been prepared on the basis that it will be part of Regulation No. 13. Regulation No. 79 has to be considered in the formulation of this amendment to Regulation No. 13.

A. PROPOSAL (Provisions for vehicle stability control systems)

Add ~~new~~ paragraphs 2.32. to 2.32.2.2., to read:

- 2.32.** “Vehicle Stability Function” means an electronic control function for a vehicle which improves the dynamic stability of the vehicle.
- 2.32.1.** A vehicle stability function may include one or both of the following:
- directional control
 - roll-over control
- 2.32.2.** Control functions within a vehicle stability function:
- 2.32.2.1.** “Directional control” means a function within a vehicle stability function that assists the driver in maintaining the vehicle in the direction intended by the driver in the case of a power-driven vehicle, and assists in maintaining the direction of the trailer with that of the towing vehicle in the case of a trailer.
- 2.32.2.2.** “Roll-over control” means a function within a vehicle stability function that reacts to the potential of roll-over to stabilise the power-driven vehicle or towing vehicle and trailer combination or the trailer during dynamic manoeuvres.

Add ~~new~~ paragraphs 5.2.1.31 to 5.2.1.31.6. and foot note ¹, to read:

- 5.2.1.31.** Special requirements for vehicles equipped with a vehicle stability function where the installation of such equipment is mandatory, ~~as defined~~ specified in paragraph

5.2.1.31.1. Where a vehicle is equipped with a vehicle stability function as defined in paragraph 2.32. the following shall apply:

In the case of directional control the function shall have the ability to automatically control individual wheel speeds by selective braking based on the evaluation of actual vehicle behaviour in comparison with a determination of vehicle behaviour demanded by the driver.^{1/}

In the case of roll-over control the function shall have the ability to automatically control individual or multiple wheel speeds by selective braking or automatically commanded braking based on the evaluation of actual vehicle behaviour that may lead to vehicle roll-over.^{1/}

5.2.1.31.2. To realise the functionality defined above a vehicle stability function shall include, in addition to selective braking and/or automatically commanded braking, at least the following:

- The ability to regulate engine power output.
- In the case of directional control: The determination of vehicle behaviour from values of yaw rate, lateral acceleration and wheel speeds and from the driver's control input to the braking system, to the steering system, and to the engine. If these values are not directly measured, the evidence of the appropriate correlation with directly measured values under all driving conditions (e.g. including driving in a tunnel) shall be shown to the technical service at the time of type approval. Only on-board generated information shall be used.
- In the case of roll-over control: The determination of vehicle behaviour from values of the vertical force on the tyre(s) (or at least lateral acceleration and wheel speeds) and from the driver's control input to the braking system, and to the engine. If these values are not directly measured, the evidence of the appropriate correlation with directly measured values under all driving conditions (e.g. including driving in a tunnel) shall be shown to the technical service at the time of type approval. Only on-board generated information shall be used.
- In the case of a towing vehicle equipped according to paragraph 5.1.3.1.: the ability to apply the service brakes of the trailer via the respective control line(s) independently of the driver.

5.2.1.31.3. The operation of the vehicle stability control shall be demonstrated by means of one of the following:

- a dynamic demonstration on one vehicle configuration and submission of test results for other vehicle configurations under the condition that these vehicles are equipped with the same vehicle stability function as the one fitted on the vehicle which has been used for the dynamic demonstration
- a computer simulation, together with data which verifies the simulation model against a practical vehicle test. The specification and functionality of the simulator is defined in ~~the~~ Appendix 1 to this Regulation.

The method by which this demonstration is carried out shall be agreed between the vehicle manufacturer and the Technical Service and shall include the critical conditions of under-steer, over-steer and roll-over as appropriate to the vehicle stability function

installed on the vehicle with the method of demonstration and results being appended to the type approval report. This may be carried-out other than at the time of type approval.

- 5.2.1.31.4.** Interventions of the vehicle stability function shall be indicated to the driver by a specific optical warning signal. The indication shall be present as long as the vehicle stability function is ~~active~~ in an intervention mode. The warning signals specified in paragraph 5.2.1.29. of this Regulation shall not be used for this purpose.

Interventions of the vehicle stability function used in any learning process to determine the vehicle operational characteristics shall not generate the above signal.

The signal shall be visible to the driver, even in daylight, such that the driver can easily verify the satisfactory condition of the signal without leaving the driver's seat.

- 5.2.1.31.5.** A vehicle stability function failure or defect shall be detected and indicated to the driver by the specific optical warning signal referred to in paragraph ~~5.2.1.31.5~~ 5.2.1.29.

The warning signal shall be constant and remain displayed as long as the failure or defect persists and the ignition (start) switch is in the “on” (run) position.

- 5.2.1.31.6.** In the case of a power-driven vehicle equipped with an electric control line and electrically connected to a trailer with an electric control line the driver shall be warned by a specific optical warning signal whenever the trailer provides the information “VDC Active” via the data communications part of the electric control line. The optical signal defined in paragraph ~~5.2.1.31.5~~ 5.2.1.31.4. above may be used for this purpose.

Add new paragraphs 5.2.2.21. to 5.2.2.21.4 and foot note ¹, to read:

- 5.2.2.21.** Special requirements for trailers equipped with a vehicle stability function where the installation of such equipment is mandatory, as specified in paragraph

- 5.2.2.21.1.** Where a trailer is equipped with a vehicle stability function as defined in paragraph 2.32. the following shall apply:

In the case of directional control the function shall have the ability to automatically control individual wheel speeds by selective braking based on the evaluation of actual trailer behaviour in comparison with a determination of the relative behaviour of the towing vehicle.^{1/}

In the case of roll-over control the function shall have the ability to automatically control individual or multiple wheel speeds by selective braking or automatically commanded braking based on the evaluation of actual trailer behaviour that may lead to roll-over.^{1/}

- 5.2.2.21.2.** To realise the functionality defined above a vehicle stability function shall include, in addition to automatically commanded braking and where appropriate selective braking, at least the following:

- The determination of trailer behaviour from ~~measured~~ values of the vertical force on the tyre(s), or at least lateral acceleration and wheel speeds. If these values are not directly measured, the evidence of the appropriate correlation with directly measured

values under all driving conditions (e.g. including driving in a tunnel) shall be shown to the technical service at the time of type approval. Only on-board generated information shall be used.

~~5.2.2.21.3. A vehicle stability function of a different design to that described in paragraph 5.2.2.21.2. above shall be deemed to fulfil the requirements of a vehicle stability function provided that at least equivalent performance is achievable.~~

~~The assessment procedure used shall be agreed between the trailer manufacturer and Technical Service to ensure the objectives defined in 2.32. are fulfilled and shall include comparative testing with a representative trailer fulfilling the specification defined in 5.2.2.21.2. above.~~

5.2.2.21.43. The operation of a vehicle stability function shall be demonstrated by means of one of the following:

- ~~• a dynamic test~~
- ~~• the submission of test results from a representative trailer including a demonstration of the stability function on a vehicle~~
- a dynamic demonstration on one vehicle configuration and submission of test results for other vehicle configurations under the condition that these vehicles are equipped with the same vehicle stability function as the one fitted on the vehicle which has been used for the dynamic demonstration
- a computer simulation together with data which verifies the simulation model against a practical vehicle test. The specification and functionality of the simulator is defined in Appendix 1 to this Regulation.

The method by which this demonstration is carried out shall be agreed between the trailer manufacturer and the Technical Service and shall include the critical conditions of roll-over, under-steer and over-steer as appropriate to the vehicle stability function installed on the trailer with the method of demonstration and results being appended to the type approval report. This may be carried-out other than at the time of type approval.

5.2.2.21.54. Trailers equipped with an electric control line, when electrically connected to a towing vehicle with an electric control line, shall provide the information “VDC active” via the data communications part of the electric control line when the vehicle stability function is active in an intervention mode. Interventions of the vehicle stability function used in any learning process to determine the trailer operational characteristics shall not generate the above information.

^{1/} Additional interaction with other vehicle systems or components is allowed. Where these systems or components are subject to special Regulations, such interaction shall comply with the requirements of those Regulations, e.g. interaction with the steering system shall comply with the requirements set out in Regulation 79 for corrective steering.


~~Regulation No. 13 Appendix 1~~
~~Example of the Simulator~~
~~(see item 5.2.1.31.3 of this Regulation)~~

~~1. The simulator~~

~~This Appendix defines an example of a simulator that may be used to demonstrate the functionality of the vehicle equipped with a vehicle stability function as defined in item 2.3.2 of this Regulation.~~

~~1.1 The simulator shall produce the required signals compatible with the control system to be evaluated and shall also react to the response of the control system to those signals so that it is possible to demonstrate the affect of the control on the vehicle for which approval is required.~~

~~1.2 The following diagram provides an example of the layout of the simulator:~~

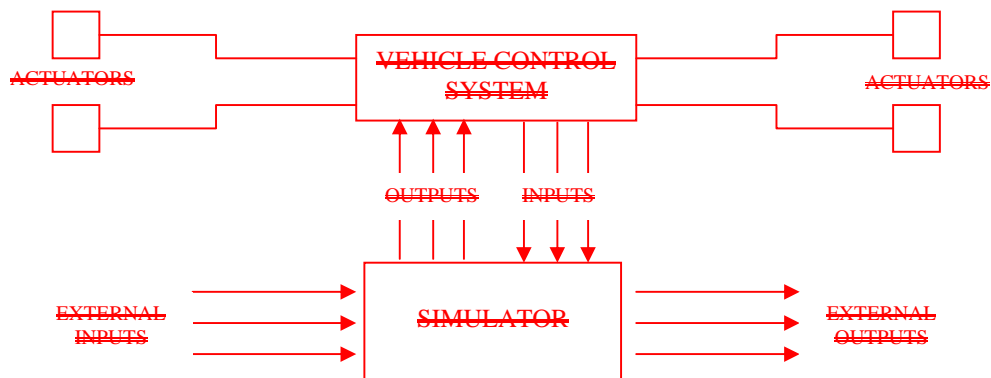

~~1.3. The simulator shall at least include the following parameters:~~

Parameter	Minimum Value	Maximum Value	Resolution
Vehicle Parameters			
Wheelbase	2m	10m	0.1m
Centre of gravity height	0	5	0.1m
Outputs			
Wheel speed front left	0	250kmh	4km/h
Wheel speed front right	0	250kmh	4km/h
Wheel speed rear left	0	250kmh	4km/h
Wheel speed rear right	0	250kmh	4km/h
Steering angle	-360°	+360°	1°
Inputs			
Brake pressure front left (pneumatic brake systems)	0bar	12bar	0.1bar
Brake pressure front right (pneumatic brake systems)	0bar	12bar	0.1bar
Brake pressure rear left (pneumatic brake systems)	0bar	12bar	0.1bar
Brake pressure rear right (pneumatic brake systems)	0bar	12bar	0.1bar
 	 	 	

Add new Appendix 1 to read:

Appendix 1

DYNAMIC STABILITY SIMULATION

The efficiency of the directional and/or rollover stability of motor vehicles, trailers and semi-trailers of categories M, N and O equipped with a Vehicle Stability Function, may be determined by computer simulation. In the case of any trailer, a representative towing vehicle shall be defined for the purpose of computer simulation in agreement with the Technical Service.

1. GENERAL CONDITIONS

1.1. Modelling and simulation tool

The simulations shall be carried out with a validated modelling and simulation tool which is either used by or has been agreed with a type approval authority or Technical Service (see paragraph 4 below) on basis of data which verifies the simulation model against a practical vehicle test.

- 1.1.1. The simulation method shall take into account the main factors which influence the directional and roll motion of the vehicle. The model shall include at least the following vehicle parameters in an explicit or implicit form:

Axle/wheel parameters

- axle/wheel geometry;
- wheel loads;
- track width;
- centre of gravity positions of unsprung masses;
- inertia (mass, J_x , J_y & J_z) of unsprung masses;
- in the case of steered wheels:
 - principal of steering;
 - steering ratio or self steering characteristics.

Suspension parameters

- principal of suspension;
- height of roll centre;
- suspension stiffness (vertical and roll; lateral and for/aft if significant);
- damping characteristics of suspension;
- kinematics of suspension (if significant);
- roll stabiliser characteristic.

Tyre parameters

- pure cornering characteristics;
- pure braking characteristics;
- combined cornering and braking characteristics;
- relaxation length (dynamic behaviour);
- radial/vertical stiffness;
- lateral stiffness;

- dynamic tyre/road friction coefficient ranging from low (ice) to high (dry asphalt) on an individual wheel basis.

Chassis/vehicle body parameters

- centre of gravity position of sprung masses;
- inertia (mass, J_x , J_y & J_z) of sprung masses;
- chassis/vehicle body (torsional) stiffness if significant.

Power train/driveline parameters if applicable

- power source characteristics (engine traction/braking torque/torque converter);
- transmission characteristics (gear ratios);
- differential gearing (gear reduction, locking characteristics).

Brake system parameters

- dynamic characteristics of the brakes.

Pay load parameters

- centre of gravity positions;
- Inertia (mass, J_x , J_y & J_z).

Other parameters/properties

- driver model with path following properties for the subjective type of simulation tests;
- steering stiffness;
- load sharing distribution between the axles of a bogie;
- in the case of a height levelling system the properties/characteristics of the height levelling system.

The vehicle parameter values represent the loaded condition and are expressed in SI-units. The values of relevant parameters (e.g. suspension, tyres, etc.) have to be non-linear to predict correctly the directional and rollover stability of the vehicle.

- 1.1.2. The Vehicle Stability Function shall be added to the simulation model by means of
 - a) a subsystem (software model) of the simulation tool;
 - or
 - b) the electronic control box in a hardware-in-the-loop configuration.

2. TRAILERS

In the case of a trailer, it shall be simulated using the characteristics of a representative power-driven vehicle to be agreed by the type approval authority or Technical Service in consultation with the manufacturer of the trailer.

3. VEHICLE LOADING CONDITION

- 3.1. The standard test condition shall be the maximum technical permissible mass of the vehicle distributed among the axles as declared by the manufacturer such that the load on each axle is proportional to the maximum permissible load for each axle.

The load shall be considered to be a fixed load with properties (mass, mass distribution and maximum recommended height of the centre of gravity) specified by the manufacturer.

In the case of a tank type vehicle the normally intended load shall be considered as an equivalent fixed load.

- 3.2. Every test shall be carried out with the stability function engaged and disengaged. All tests shall be repeated in the unladen condition.

4. VALIDATION OF THE SIMULATION TOOL

- 4.1.1. The validity of the applied modelling and simulation tool shall be verified by means of comparisons with a practical vehicle test(s). The test(s) utilised for the validation shall result in loss of directional control (under-steer and over-steer) or roll-over control as appropriate to the functionality of the stability control function installed on a representative vehicle. Such a test(s) may include one or more of the following:

- steady state circular test;
- step steer input test;
- μ - split single lane change;
- double lane change;
- reversed steering test or “fish hook” test;
- asymmetrical one period sine steer or pulse steer input test;
- other recognised tests(s).

During the test(s) the following motion variables, as appropriate, shall be recorded or calculated:

- yaw velocity;
- lateral acceleration;
- roll angle;
- forward velocity;
- driver input;

- 4.2. The modelling and simulation tool can be regarded as valid when the simulation data is within [5%] for a steady state test and within [10%] for a dynamic test of the practical test data. A simulator approval report shall be produced, a model of which is defined in Appendix 2, and a copy attached to the vehicle approval report.

Add new Appendix 2 to read:

Appendix 2

VEHICLE STABILITY FUNCTION SIMULATION TOOL TEST REPORT

Test Report Number:

1. Identification

- 1.1. Name and address of the simulation tool manufacturer
1.2. Simulation tool identification; name/model/number (hardware and software)

2. Approved use

- 2.1. Vehicle type: (e.g. truck, tractor, bus, semi-trailer, centre-axle trailer, full trailer)
- 2.2. Vehicle configuration: (e.g. 4x2, 4x4, 6x2, 6x4, 6x6)
- 2.3. Limiting factors: (e.g. mechanical suspension only)

3. Verifying vehicle test(s)

- 3.1. Description of vehicle(s) including the towing vehicle in case of trailer testing:
 - 3.1.1. Vehicle(s) identification: make/model/VIN
 - 3.1.1.1 Non-standard fitments:
 - 3.1.2. Vehicle description, including axle configuration/suspension/wheels, engine and drive line, braking system(s) and vehicle stability function content (directional control/roll-over control), steering system, with name/model/number identification:
 - 3.1.3. Vehicle data used in the simulation (explicit):
- 3.2. Description of test(s) including location(s), road/test area surface conditions, temperature and date(s):
- 3.3 Results laden and unladen with the vehicle stability function switched on and off:

4. Simulation results

- 4.1. Vehicle parameters and the values used in the simulation that are not taken from the actual test vehicle (implicit):
- 4.2. Results laden and unladen with the vehicle stability function switched on and off for each test conducted under paragraph 3.2. of this appendix:

5. Approval

- 5.1. Technical Service conducting the test ⁽¹⁾:
Signed: Date:
- 5.2. Approval Authority ⁽¹⁾:
Signed: Date:

⁽¹⁾ To be signed by different persons if the Technical Service and the Approval Authority is the same organisation.

Items to be considered at a later meeting:

- In the case of a motor vehicle, a vehicle stability function shall consist of at least directional control.
- In the case of a trailer a vehicle stability function shall consist of at least roll-over control
- Effect on paragraph 5.2.2.17.1.

Annex 2

Add a new paragraph 14.14. ~~as follows~~ to read:

14.14. The vehicle is / is not ²⁾ equipped with a vehicle stability function

In the case where the vehicle is equipped with a vehicle stability function:

Vehicle stability function is optional equipment: Yes / No ²⁾

Vehicle stability function includes directional control: Yes / No ²⁾

Vehicle stability function includes roll-over control: Yes / No ²⁾

Vehicle stability function has been approved according to paragraphs 5.2.1.31. or 5.2.2.21. as appropriate: Yes / No ²⁾

Annex 19

Add a new paragraph 1.1.5. to read:

1.1.5. Vehicle stability function (refer to paragraph 6.).

Add ~~a~~ new paragraphs 6. to 6.5. to read:

6. Vehicle Stability Function

6.1. General

6.1.1. This ~~paragraph~~ section defines a test procedure to determine the performance of a vehicle stability function consisting of ~~directional control and/or roll-over control~~. At least one of the following functions:

- directional control
- roll-over control.

6.2. Information Document

6.2.1. The system/vehicle manufacturer ~~of the vehicle stability function~~ shall supply to the Technical Service an Information Document of the control function(s) for which performance verification is required. This document shall contain at least the information defined in Appendix 7 to this Annex.

6.3. Definition of test vehicles

6.3.1. Based on the information supplied in the Information Document, in particular the trailer applications defined in paragraph 2.1. of Appendix 7, the Technical Service shall carry out demonstrative tests as defined in paragraph 5.2.2.21.3. of this Regulation on a representative trailer(s) having up to three axles and equipped with the respective braking system configurations. ~~Additionally, when selecting a representative trailer(s) for evaluation consideration shall also be given to the parameters defined in the following paragraphs:~~

- 6.3.1.1. [When selecting a representative trailer\(s\) for evaluation, consideration shall also be given to the following:](#)

Suspension type: for each suspension group i.e. balanced pneumatic a representative trailer shall be evaluated.

Wheelbase: wheel base shall not be a limiting factor

Brake type: approval shall be limited to S cam or disc brakes but should other types become available, then comparative testing may be required.

Braking system: The braking system of the trailer(s) to be evaluated shall comply with all of the relevant requirements of this Regulation.

- 6.4. Test Schedule:

- 6.4.1. The demonstrative tests to be carried out shall be agreed between the system/[vehicle](#) manufacturer and the Technical Service and shall include the critical conditions of roll-over, under-steer and over-steer as appropriate to the vehicle stability function installed on the trailer [with the method of demonstration and results being included in the test report.](#)

- 6.5. Towing vehicle: the towing vehicle used for evaluating the performance of the vehicle (trailer) stability function shall have the necessary pneumatic and electrical connections and if the towing vehicle is equipped with a vehicle stability function as defined in paragraph 2.32. of this Regulation that function shall be disabled.

Add a new Appendix 7 to Annex 19 [as follows](#) to read:

Annex 19 – Appendix 7

Vehicle Stability Function Information Document

1. General
 - 1.1. Name of manufacturer
 - 1.2. System name
 - 1.3. System variations
 - 1.4. System configurations (where appropriate)
 - 1.5. Explanation of the basic function and/or philosophy of the ~~system~~ [control](#)
2. Applications
 - 2.1. List of trailer types and configurations for which approval is required~~7~~
 - 2.2. Schematic diagrams of the respective configurations installed on the trailers defined in 2.1. above with consideration given to the following:
 - Lift axles

- Steering axles
 - Anti-lock braking configurations
- 2.3. Scope of application with respect to suspension type i.e. balanced pneumatic etc. with reference to the manufacturer and model/type
- 2.4. Additional information (if applicable) to the application of the directional control and/or the roll-over control function(s)
3. Component Description
- 3.1. Sensors external to the controller
- Function
 - Identification e.g. part numbers
- 3.2. Controller(s)
- General description and function
 - Identification e.g. part numbers
 - Safety aspects of the controller(s) in accordance with Annex 18
 - Additional features
- 3.3. Modulators
- General description and function
 - Identification
 - Limitations
- 3.4. Electrical Equipment
- Circuit diagrams
 - Powering methods
- 3.5. Pneumatic circuits
- System schematics including anti-lock braking associated with the trailer types defined in paragraph 6.2.1 of this Annex
- 3.6. Electro Magnetic Compatibility
- 3.6.1. Documentation demonstrating compliance with Regulation No. 10 including the 02 Series of amendments.

Add a new Appendix 8 to Annex 19 [as follows](#) to read:

Annex 19 – Appendix 8

Vehicle Stability Function Test Report

Test Report No:

1. Identification

- 1.1. Manufacturer of the Vehicle Stability Function (name and address)
- 1.2. System name / model
2. System(s) and Installations approved
 - 2.1. Anti-lock braking configurations (where appropriate)
 - 2.2. Range of application (trailer type and number of axles)
 - 2.3. System Identification
 - 2.4. Additional features.
3. Test Data and Results
 - 3.1. Test vehicle data:
 - 3.2. Test surface information
 - 3.3. Demonstrative tests used for the purpose of evaluating the directional control and ~~the~~ the roll-over control [as appropriate](#).
 - 3.4. Test results
 - 3.5. Assessment in accordance with Annex 18 to this Regulation
4. Limits of installation:
 - 4.1. Suspension type
 - 4.2. Brake type
 - 4.3. Trailer installation
 - 4.4. Anti-lock braking configurations
 - 4.5. Other recommendations/limitations (e.g. lifting axles, steering axles etc)
5. Date of Test:

This test has been carried out and the results reported in accordance with Annex 19 to ECE Regulation No. 13 as last amended by the series of amendments.

Technical Service ^{1/} conducting the test

Signed: Date:
6. Approval Authority ^{1/}

Signed: Date:

^{1/} To be signed by different persons even when the Technical Service and Approval Authority are the same or alternatively, a separate Approval Authority Authorisation issued with the report.

Appendix 7 (former) is to be renumbered Appendix 9

Annex 20

Paragraph 2.1.3. amend to read:

2.1.3. A documentation package that contains the relevant verification information including the relevant calculations, where appropriate, for the following:

Performance Requirements	Annex 20 Reference
Cold service braking performance	3.
Parking brake performance	4.
Automatic (emergency) brake performance	5.
Failure of brake distribution system	6.
Anti-lock braking	7.
Vehicle stability function	8.
Functional checks	9.

Add a new Paragraph 8.0 to read:

8.0 Alternative procedure for demonstrating the vehicle stability function performance

8.1 Testing of a trailer in accordance with paragraph 5.2.2.21. of this Regulation may be waived at the time trailer type approval provided that the stability control function complies with the relevant requirements of Annex 19 to this Regulation.

8.2. Verification

8.2.1. Verification of components and installation

The specification of the braking system, in which the stability control function is integrated, installed on the trailer to be Type Approved shall be verified by satisfying each of the following criteria:

	Condition	Criteria
8.2.1.1	(a) Sensor(s)	No change allowed
	(b) Controller(s)	No change allowed
	(c) Modulator(s)	No change allowed

8.2.1.2.	Trailer types as defined in the test report	No change allowed
8.2.1.2.	Installation configurations as defined in the test report	No change allowed
8.2.1.3.	For other limitations refer to paragraph 4 of the test report as described in Appendix 8 of Annex 19 to this Regulation.	No change allowed

Paragraph 8. (former): renumber as paragraph 9.

Add a new paragraph 9.1.8. to read:

9.1.8. Vehicle stability function

9.1.8.1. For practical reasons verification of the vehicle stability control function shall be limited to an installation check and observation of the correct warning signal sequence to ensure no faults are present as defined in paragraph 8.2. above

B. NOTES TO THE PROPOSAL

Terminology

The terms “Vehicle Stability Function” and “Trailer Roll Stability Function” have been chosen as they are believed to be unconnected with a specific organization. Organization specific terminology includes – Vehicle Dynamics Control (VDC), Vehicle Stability Control (VSC), Electronic Stability Control (ESC), Electronic Stability Program (ESP), Electronic Stabilisation Programme (ESP), Porsche Stability Management (PSM), Dynamic Stability Control (DSC), Dynamic Stability Program (DSP), Roll Stability Program (RSP), Trailer Roll Stability Program (TRSP), Roll Over Protection (ROP), Roll Stability Control (RSC), and Roll Stability Support (RSS).

- - - - -