

11 June 2020

Agreement

Concerning the Adoption of Harmonized Technical United Nations Regulations for Wheeled Vehicles, Equipment and Parts which can be Fitted and/or be Used on Wheeled Vehicles and the Conditions for Reciprocal Recognition of Approvals Granted on the Basis of these United Nations Regulations *

(Revision 3, including the amendments which entered into force on 14 September 2017)

Addendum 18: UN Regulation No. 19

Revision 8

Incorporating all valid text up to:

Supplement 4 to the 03 series of amendments – Date of entry into force: 10 June 2014
Supplement 6 to the 04 series of amendments – Date of entry into force: 9 October 2014
Supplement 7 to the 04 series of amendments – Date of entry into force: 15 June 2015
Supplement 8 to the 04 series of amendments – Date of entry into force: 8 October 2015
Supplement 9 to the 04 series of amendments – Date of entry into force: 10 October 2017
Supplement 10 to the 04 series of amendments – Date of entry into force: 10 February 2018
05 series of amendments – Date of entry into force: 15 October 2019

Uniform provisions concerning the approval of power-driven vehicle front fog lamps



UNITED NATIONS

* Former title of the Agreement: Agreement Concerning the Adoption of Uniform Conditions of Approval and Reciprocal Recognition of Approval for Motor Vehicle Equipment and Parts, done at Geneva on 20 March 1958 (original version); Agreement concerning the Adoption of Uniform Technical Prescriptions for Wheeled Vehicles, Equipment and Parts which can be Fitted and/or be Used on Wheeled Vehicles and the Conditions for Reciprocal Recognition of Approvals Granted on the Basis of these Prescriptions, done at Geneva on 5 October 1995 (Revision 2).

This document is meant purely as documentation tool. The authentic and legal binding texts are:

- ECE/TRANS/WP.29/2013/74
- ECE/TRANS/WP.29/2014/17
- ECE/TRANS/WP.29/2013/75/Add.1
- ECE/TRANS/WP.29/2013/75/Rev.1
- ECE/TRANS/WP.29/2015/16
- ECE/TRANS/WP.29/2017/23
- ECE/TRANS/WP.29/2017/76
- ECE/TRANS/WP.29/2018/95/Rev.1

UN Regulation No. 19

Uniform provisions concerning the approval of power-driven vehicle front fog lamps

Contents

	<i>Page</i>
Regulation	
Scope	5
1. Definitions.....	5
2. Application for approval	6
3. Markings	8
4. Approval	9
5. General specifications	11
6. Illumination.....	13
7. Colour	18
8. Determination of discomfort (dazzle)	18
9. Modifications of the type of front fog lamp and extension of approval	18
10. Conformity of production.....	18
11. Penalties for non-conformity of production	19
12. Production definitively discontinued.....	20
13. Names and addresses of Technical Services responsible for conducting approval tests, and of Type Approval Authorities.....	20
14. Transitional provisions.....	20
Annexes	
1 Communication.....	21
2 Tolerance requirements for conformity of production control procedure	23
3 Examples of arrangements of approval marks for front fog lamps of Class B and Class F3	25
4 Measuring screen geometry and measuring grid.....	34
5 Tests for stability of photometric performance of front fog lamps in operation (tests on complete front fog lamps).....	37
6 Requirements for lamps incorporating lenses of plastic material - Testing of lens or material samples and of complete lamps.....	42
Appendix 1 - Chronological order of approval tests	47
Appendix 2 - Method of measurement of the diffusion and transmission of light	49
Appendix 3 - Spray testing method.....	51
Appendix 4 - Adhesive tape adherence test.....	52
7 Minimum requirements for conformity of production control procedure	53
8 Minimum requirements for sampling by an inspector.....	55

9	Definition and sharpness of the cut-off line and aiming procedure by means of this cut-off line for Class F3 front fog lamps.....	58
10	Overview of operational periods concerning test for the stability of photometric performance ...	60
11	Centre of reference.....	62
12	Requirements in case of use of LED module(s)	63

Introduction

This Regulation¹ applies to front fog lamps, which may incorporate lenses of glass or plastic material. It incorporates two distinct classes.

The original front fog lamp, Class "B" since inception, has been updated to incorporate the angular coordinate system with an amendment to the values in the relevant photometric table. With this class, only light sources as specified in UN Regulation No. 37 are allowed.

The Class "F3" is designed to increase photometric performance. In particular the beam width and the minimum luminous intensities below the H-H line (paragraph 6.4.3. of this Regulation) have been increased whilst controls on the maximum intensity in the foreground are introduced. Above the H-H line, the intensity of the veiling light is reduced to improve visibility. Additionally this class may provide adaptive beam patterns where the performance is varied according to the visibility conditions.

The introduction of the Class "F3" provides for requirements that are amended to be similar to those of a headlamp as follows:

- (a) The photometric values are specified as luminous intensities using the angular coordinate system;
- (b) Light sources can be selected according to the provisions of UN Regulation No. 37 (Filament light sources) and UN Regulation No. 99 (Gas discharge light sources). Light Emitting Diode (LED) modules may also be used.
- (c) The cut-off and the gradient definitions.

The photometric requirements permit the use of asymmetrical beam distributions.

Scope

This Regulation applies to front fog lamps for vehicles of categories L₃, L₄, L₅, L₇, M, N, and T.²

1. Definitions

For the purpose of this Regulation,

- 1.1. The definitions given in UN Regulation No. 48 and its series of amendments in force at the time of application for type approval shall apply to this Regulation.
- 1.2. "*Lens*" means the outermost component of the front fog lamp (unit), which transmits light through the illuminating surface;
- 1.3. "*Coating*" means any product or products applied in one or more layers to the outer face of a lens;

¹ Nothing in this Regulation shall prevent a Party to the Agreement applying this Regulation from prohibiting the combination of a front fog lamp incorporating a plastic lens, approved under this Regulation, with a mechanical headlamp-cleaning device (with wipers).

² As defined in the Consolidated Resolution on the Construction of Vehicles (R.E.3.), document ECE/TRANS/WP.29/78/Rev.6, para. 2. - www.unece.org/trans/main/wp29/wp29wgs/wp29gen/wp29resolutions.html

- 1.4. "Front fog lamps of different types" are front fog lamps that differ in such essential respects as:
 - 1.4.1. The trade name or mark:
 - (a) Lamps bearing the same trade name or mark but produced by different manufacturers shall be considered as being of different types;
 - (b) Lamps produced by the same manufacturer differing only by the trade name or mark shall be considered as being of the same type.
 - 1.4.2. Different "Classes" (B or F3) identified by particular photometric provisions;
 - 1.4.3. The characteristics of the optical system; (basic optical design, type/category of light source, LED module, etc.);
 - 1.4.4. The inclusion of components capable of altering the optical effects by reflection, refraction, absorption and/ or deformation during operation and the variable intensity control, if any;
 - 1.4.5. The category of filament lamp(s) used, as listed in UN Regulation No. 37, UN Regulation No. 99 and/or the LED module specific identification code(s) (if applicable);
 - 1.4.6. However, a device intended for the installation on the left side of the vehicle and the corresponding device intended for the installation of the right side of the vehicle shall be considered to be of the same type.
- 1.5. "*Colour of the light emitted from the device*". The definitions of the colour of the light emitted, given in UN Regulation No. 48 and its series of amendments in force at the time of application for type approval, shall apply to this Regulation.
- 1.6. References made in this Regulation to standard (étalon) light sources and to UN Regulations Nos. 37 and 99 shall refer to UN Regulations Nos. 37 and 99 and their series of amendments in force at the time of application for type approval.

2. Application for approval

- 2.1. The application for approval shall be submitted by the holder of the trade name or mark or by his duly accredited representative.
- 2.2. The application relating to each type of front fog lamp shall be accompanied by:
 - 2.2.1. Drawings in triplicate in sufficient detail to permit identification of the type and representing a frontal view of the front fog lamp, with the relevant details of the optical components if any, and the cross-section; the drawings shall indicate the space reserved for the approval mark.
 - 2.2.1.1. If the front fog lamp is equipped with an adjustable reflector, an indication of the mounting position(s) of the front fog lamp in relation to the ground and the longitudinal median plane of the vehicle, if the front fog lamp is for use in that (those) position(s) only.
 - 2.2.2. For the test of plastic material of which the lenses are made:
 - 2.2.2.1. Thirteen lenses;
 - 2.2.2.1.1. Six of these lenses may be replaced by six samples of material at least 60 x 80 mm size, having a flat or convex outer surface and a substantially flat area (radius of curvature not less than 300 mm) in the middle measuring at least 15 x 15 mm);

- 2.2.2.1.2. Every such lens or sample of material shall be produced by the method to be used in mass production;
- 2.2.2.1.3. A reflector to which the lenses can be fitted in accordance with the manufacturer's instructions.
- 2.2.3. The materials making up the lenses and coatings, if any, shall be accompanied by the test report of the characteristics of these materials and coatings if they have already been tested.
- 2.3. In case of Class B front fog lamps:
 - 2.3.1. A brief technical specification including the category of filament lamp used as listed in UN Regulation No. 37 and its series of amendments in force at the time of application for type approval, even if the filament lamp cannot be replaced;
 - 2.3.2. Two samples of each type of front fog lamp, one sample intended for the installation on the left side of the vehicle and one sample intended for the installation of the right side of the vehicle.
- 2.4. In case of Class F3 front fog lamps:
 - 2.4.1. A brief technical specification including the category of the light source(s) used; this (these) light source category(ies) shall be listed in UN Regulation No. 37 or UN Regulation No. 99 and their series of amendments in force at the time of application for type approval, even if the light source cannot be replaced.
 - 2.4.2. In the case of LED module(s), the specific identification code of the module shall be stated. The drawing shall contain sufficient details to identify it and the position intended for the specific identification code and the trademark of the applicant.
 - 2.4.3. The make and types of the ballast(s) and /or the light source control gear, where applicable, shall be specified:
 - 2.4.3.1. In the case of an adaptive front fog lamp, a concise description of the variable intensity control.
 - 2.4.3.2. In case of the use of a light source control gear not being part of the device, the voltage(s) with tolerances or the total voltage range at the terminals to that light source control gear.
 - 2.4.4. If the front fog lamp is fitted with LED module(s), a brief technical specification shall be provided. This information shall include the part number assigned by the light source manufacturer, a drawing with dimensions and the basic electrical and photometric values, an indication whether the light source complies with the UV-radiation requirements of paragraph 4.6. of Annex 12 to this Regulation, an official test report related to paragraph 5.8. of this Regulation and the objective luminous flux.
 - 2.4.5. In the case of LED module(s) and if no provisions are taken to shield the relevant front fog lamp components made of plastic material from UV-radiation of light sources, e.g. by UV-retaining glass filters:

One sample of each of the relevant materials. This shall have similar geometry to that of the front fog lamp being tested. Each material sample shall have the same appearance and surface treatment, if any, as intended for use in the front fog lamp to be approved.
 - 2.4.6. In the case of an approval of a front fog lamp containing plastic lenses and/or having inner optical parts made from plastic, which have already been tested: The materials making up the lenses, coatings or optical inner parts, if any, shall be accompanied by the test report(s) on material testing against UV-radiation.

- 2.4.7. Two samples of each type of front fog lamp, one sample intended for the installation on the left side of the vehicle and one sample intended for the installation on the right side of the vehicle; or a matched pair of front fog lamps.
- 2.4.8. One light source control gear, if applicable.
- 2.4.9. One variable intensity control or a generator providing the same signals, if applicable.
- 2.5. The Type Approval Authority shall verify the existence of satisfactory arrangements for ensuring effective control of the conformity of production before type approval is granted.
- 2.6. In the case of a type of lamp differing only by the trade name or mark from a type that has already been approved it shall be sufficient to submit:
 - 2.6.1. A declaration by the lamp manufacturer that the type submitted is identical (except in the trade name or mark) with and has been produced by the same manufacturer as the type already approved, the latter being identified by its approval code;
 - 2.6.2. Two samples bearing the new trade name or mark or equivalent documentation.

3. Markings

- 3.1. Front fog lamps which are submitted for approval shall clearly, legibly and indelibly bear:
 - (a) The trade name or mark of the applicant;
 - (b) Marking indicating the class of the front fog lamp;
And in case of Class F3 front fog lamps:
 - (c) The LED module specific identification code, if any.
- 3.2. They shall comprise, on the lens and on the main body,³ spaces of sufficient size for the approval mark and the additional symbols referred to in paragraph 3.; these spaces shall be indicated on the drawings referred to in paragraph 2.2.1. of this Regulation.
- 3.3. The approval marking shall be placed on an inner or outer part (transparent or not) of the device which cannot be separated from the transparent part of the device emitting light. In any case the marking shall be visible when the device is fitted on the vehicle, at least when a movable part such as the hood or boot lid or a door is opened.
- 3.4. In case of Class F3 front fog lamps with LED module(s) the lamp shall bear the marking of the rated voltage, rated wattage and the light source module specific identification code.
- 3.5. The LED module(s) submitted along with the application for approval of the lamp:
 - 3.5.1. Shall bear the trade name or mark of the applicant; this marking must be clearly legible and indelible;
 - 3.5.2. Shall bear the specific identification code of the module; this marking must be clearly legible and indelible.

³ If the lens cannot be detached from the main body of the front fog lamp, a space on the lens or body shall be sufficient.

The specific identification code shall comprise the starting letters "MD" for "Module" followed by the approval marking without the circle as prescribed in paragraph 4.2.1. below; this specific identification code shall be shown in the drawings mentioned in paragraph 2.2.1. of this Regulation and in the case where several non-identical LED modules are used, followed by additional symbols or characters. The approval marking does not have to be the same as the one on the lamp in which the module is used, but both markings shall be from the same applicant.

- 3.5.3. If the LED module(s) are non-replaceable, the markings for LED module(s) are not required.
- 3.6. If a light source control gear is used, which is not part of the LED module it shall be marked with its specific identification code(s), the rated input voltage and wattage.

4. Approval

- 4.1. General
 - 4.1.1. If all the samples of a type of front fog lamp submitted in pursuance of paragraph 2. of this Regulation satisfy the provisions of this Regulation, approval shall be granted.
 - 4.1.2. Where grouped, combined or reciprocally incorporated lamps have been found to comply with the requirements of several Regulations, a single international approval mark may be applied provided that each of the grouped, combined or reciprocally incorporated lamps satisfies the provisions applicable to it.
 - 4.1.3. An approval number shall be assigned to each type approved. Its first two digits (at present 04)⁴ shall indicate the series of amendments incorporating the most recent major technical amendments made to the Regulation at the time of issue of the approval. The same Contracting Party may not assign the same number to another type of front fog lamp covered by this Regulation except in the case of an extension of the approval to a device differing only in the colour of the light emitted.
 - 4.1.4. Notice of approval or of extension or refusal or withdrawal of approval or production definitely discontinued of a type of front fog lamp pursuant to this Regulation shall be communicated to the Parties to the 1958 Agreement applying this Regulation by means of a form conforming to the model in Annex 1 to this Regulation, with the indications according to paragraph 2.2. of this Regulation.
 - 4.1.5. In addition to the mark prescribed in paragraph 3.1. above an approval mark as described in paragraphs 4.2. and 4.3. below shall be affixed in the spaces referred to in paragraph 3.2. above to every fog lamp conforming to a type approved under this Regulation.
- 4.2. Composition of the approval mark
 - The approval mark shall consist of:
 - 4.2.1. An international approval marking, comprising of:

⁴ The 05 series of amendments does not require changes in the approval number (TRANS/WP.29/815, para. 82).

- 4.2.1.1. A circle surrounding the letter "E" followed by the distinguishing number of the country which has granted approval;⁵ and;
- 4.2.1.2. The approval number prescribed in paragraph 4.1.3. above.
- 4.2.2. The following additional symbol (or symbols):
 - 4.2.2.1. On front fog lamps meeting the requirements of this Regulation, in the case of:
 - (a) Class B; the letter "B";
 - (b) Class F3; the symbol "F3".
 - 4.2.2.2. On front fog lamps incorporating a lens of plastic material the group of letters "PL" to be affixed near the symbols prescribed in paragraph 4.2.2.1. above.
 - 4.2.2.3. In every case the relevant operating mode used during the test procedure according to paragraph 1.1.1. of Annex 5 and the permitted voltages according to paragraph 1.1.2. of Annex 5 shall be stipulated on the approval forms and on the communication forms transmitted to the countries which are Contracting Parties to the Agreement and which apply this Regulation.

In the corresponding cases the device shall be marked as follows:

 - 4.2.2.3.1. On units meeting the requirements of this Regulation which are so designed that the filament(s) of one function shall not be lit simultaneously with that of any function with which it may be reciprocally incorporated, an oblique stroke (/) shall be placed behind the symbol in the approval mark of such function.
 - 4.2.2.3.2. However, if only the front fog lamp and the passing-lamp shall not be lit simultaneously, the oblique stroke shall be placed behind the fog lamp symbol, this symbol being placed either separately or at the end of a combination of symbols.
 - 4.2.2.3.3. On units meeting the requirements of Annex 5 to this Regulation only when supplied with a voltage of 6 V or 12 V, a symbol consisting of the number 24 crossed out by an oblique cross (x) shall be placed near the filament lamp holder.
 - 4.2.2.4. The reciprocal lamp incorporation of passing-beam lamp and front fog lamp is possible if it is in compliance with UN Regulation No. 48.
 - 4.2.2.5. Front fog lamps of Class F3 having asymmetric light distribution and which must not be indiscriminately mounted on either side of the vehicle, shall bear an arrow pointing to the outside of the vehicle.
 - 4.2.2.6. The two digits of the approval number (at present 04)⁴ which indicate the series of amendments incorporating the most recent major technical amendments made to the Regulation at the time of issue of the approval may be marked close to the above additional symbols.
 - 4.2.2.7. The marks and symbols referred to in paragraphs 4.2.1. and 4.2.2. above shall be clearly legible and be indelible even when the front fog lamp is fitted in the vehicle.
- 4.3. Arrangement of the approval mark
 - 4.3.1. Independent lamps

⁵ The distinguishing numbers of the Contracting Parties to the 1958 Agreement are reproduced in Annex 3 to Consolidated Resolution on the Construction of Vehicles (R.E.3) (ECE/TRANS/WP.29/78/Rev.6, Annex 3)
www.unece.org/trans/main/wp29/wp29wgs/wp29gen/wp29resolutions.html

Annex 3 to this Regulation gives examples of arrangements of the approval mark with the above-mentioned additional symbols.

- 4.3.2. Grouped, combined or reciprocally incorporated lamps
- 4.3.2.1. Where grouped, combined or reciprocally incorporated lamps have been found to comply with the requirements of several Regulations, a single international approval mark may be provided, consisting of a circle surrounding the letter "E" followed by the distinguishing number of the country which has granted the approval, and an approval number. This approval mark may be located anywhere on the grouped, combined or reciprocally incorporated lamps, provided that:
 - 4.3.2.1.1. It is visible after their installation;
 - 4.3.2.1.2. No part of the grouped, combined or reciprocally incorporated lamps that transmits light can be removed without at the same time removing the approval mark.
 - 4.3.2.2. The identification symbol for each lamp appropriate to each Regulation under which approval has been granted, together with the corresponding series of amendments incorporating the most recent major technical amendments to the Regulation at the time of issue of the approval and, if necessary, the required arrow shall be marked:
 - 4.3.2.2.1. Either on the appropriate light-emitting surface;
 - 4.3.2.2.2. Or in a group, in such a way that each of the grouped, combined or reciprocally incorporated lamps may be clearly identified.
 - 4.3.2.3. The size of the components of a single approval mark shall not be less than the minimum size required for the smallest of the individual marks by the Regulation under which approval has been granted.
 - 4.3.2.4. An approval number shall be assigned to each type approved. The same Contracting Party may not assign the same number to another type of grouped, combined or reciprocally incorporated lamps covered by this Regulation.
 - 4.3.2.5. Annex 3, Figure 3, to this Regulation gives examples of arrangements of approval marks for grouped, combined or reciprocally incorporated lamps with all the above-mentioned additional symbols.
- 4.3.3. In the case of lamps, the lens of which are used for different types of front fog lamps and which may be reciprocally incorporated or grouped with other lamps, the provisions in paragraph 4.3.2. above are applicable.
 - 4.3.3.1. In addition, where the same lens is used for different types of lamps, it may bear the different approval marks relating to the different types of front fog lamps or units of lamps, provided that the main body of the front fog lamp, even if it cannot be separated from the lens, also comprises the space described in paragraph 3.2. of this Regulation and bears the approval marks of the actual functions.

If different types of front fog lamps comprise the same main body, the latter may bear the different approval marks.
 - 4.3.3.2. Annex 3, Figure 4, to this Regulation gives examples of arrangements of approval marks relating to the above case.

5. General specifications

The requirements contained in sections 5. "General specifications" and 6. "Individual specifications" and in the Annexes referenced in the said sections of UN Regulations Nos. 48, 53 or 86, and their series of amendments

in force at the time of application for the lamp type approval shall apply to this Regulation.

The requirements pertinent to each lamp and to the category/ies of vehicle on which the lamp is intended to be installed shall be applied, where its verification at the moment of lamp type approval is feasible.

- 5.1. Each sample of front fog lamp submitted in conformity with paragraph 2.2. above shall meet the specifications set forth in paragraphs 6. and 7. of this Regulation.
- 5.2. The front fog lamps shall be so designed and constructed that in normal use, despite the vibrations to which they may then be subjected, their satisfactory operation continues to be ensured and they retain the characteristics prescribed by this Regulation. The correct position of the lens shall be clearly marked and the lens and reflector shall be so secured as to prevent any rotation during use. Conformity with the requirements of this paragraph shall be verified by visual inspection and, where necessary, by a trial fitting.
 - 5.2.1. Front fog lamps shall be fitted with a device enabling them to be so adjusted on the vehicles as to comply with the rules applicable to them. Such a device need not be fitted on units in which the reflector and the lens cannot be separated, provided the use of such units is confined to vehicles on which the front fog lamp setting can be adjusted by other means. Where a front fog lamp and another front lamp, each equipped with its own light source, are assembled to form a composite unit, the adjusting device shall enable each optical system to be individually adjusted.
 - 5.2.2. These provisions shall not apply to front lamp assemblies whose reflectors are indivisible. For this type of assembly the requirements of paragraph 6.3.4. or 6.4.3. of this Regulation (as appropriate) shall apply.
- 5.3. Complementary tests shall be carried out according to the requirements of Annex 5 to ensure that in use there is no excessive change in photometric performance.
- 5.4. If the lens of the front fog lamp is of plastic material, tests shall be carried out according to the requirements of Annex 6.
- 5.5. In the case of the use of replaceable light sources:
 - (a) The light source's holder shall conform to the characteristics given in IEC Publication No. 60061. The holder data sheet relevant to the category of light sources used applies;
 - (b) The light source shall fit easily into the front fog lamp;
 - (c) The design of the device shall be such that the light source(s) can be fixed in no other position but the correct one.
- 5.6. In the case of Class B, the front fog lamp shall only be equipped with one filament light source approved according to UN Regulation No. 37, even if the filament light source cannot be replaced. Any UN Regulation No. 37 approved filament light source may be used provided that:
 - (a) Its objective luminous flux does not exceed 2,000 lumens, and
 - (b) No restriction on the use is made in UN Regulation No. 37 and its series of amendments in force at the time of application for type approval.
- 5.6.1. Even if this filament light source cannot be replaced it shall comply with the requirements in paragraph 5.6. above.
- 5.7. In the case of Class F3, irrespective of whether the light sources can be replaced or not, the front fog lamp shall only be equipped with:
 - 5.7.1. One or more light sources approved according to:

- 5.7.1.1. UN Regulation No. 37 and its series of amendments in force at the time of application for type approval, provided that no restriction on their use is made,
- 5.7.1.2. Or, UN Regulation No. 99 and its series of amendments in force at the time of application for type approval,
- 5.7.2. And/or, one or more LED modules where the requirements of Annex 12 to this Regulation shall apply; compliance with these requirements shall be tested.
- 5.8. In the case of LED module(s) it shall be checked that:
 - 5.8.1. The design of the LED module(s) shall be such that they can be fitted in no position other than the correct one.
 - 5.8.2. Non-identical light source modules, if any, shall be non-interchangeable within the same lamp housing.
 - 5.8.3. The LED module(s) shall be tamperproof.
- 5.9. In case of front fog lamps with light source(s) having a total objective luminous flux that exceeds 2,000 lumens, a reference shall be made in item 10. of the communication form of Annex 1.
- 5.10. If the lens of the front fog lamp is made of plastic materials, tests shall be done according to the requirements of Annex 6.
 - 5.10.1. The UV resistance of light transmitting components located inside the front fog lamp and made of plastic material shall be tested according to Annex 6, paragraph 2.7.
 - 5.10.2. The test in paragraph 5.10.1. is not necessary if low-UV type light sources as specified in UN Regulation No. 99 in Annex 12 to this Regulation are used, or if provisions are taken, to shield the relevant lamp components from UV radiation, e.g. by glass filters.
- 5.11. The front fog lamp and its ballast system of light source control gear shall not generate radiated or power line disturbances, which cause a malfunction of other electric/electronic systems of the vehicle:⁶
- 5.12. Front fog lamps, designed to operate permanently with an additional system to control the intensity of the light emitted, or which are reciprocally incorporated with another function, using a common light source, and designed to operate permanently with an additional system to control the intensity of the light emitted, are permitted.
- 5.13. In the case of Class F3 the sharpness and linearity of the cut-off shall be tested according to the requirements of Annex 9.

6. Illumination

- 6.1. Front fog lamps shall be so designed as to provide illumination with limited dazzle.
- 6.2. The luminous intensity produced by the front fog lamp shall be measured at 25 m distance by means of a photoelectric cell having a useful area comprised within a square of 65 mm side.

The point HV is the centre-point of the coordinate system with a vertical polar axis. Line h is the horizontal through HV (see Annex 4 to this Regulation).

⁶ Compliance with the requirements for electromagnetic compatibility is relevant to the vehicle type.

- 6.3. In the case of Class B front fog lamps:
- 6.3.1. A colourless standard (étalon) filament lamp as specified in UN Regulation No. 37, of the category specified by the manufacturer, which may be supplied by the manufacturer or applicant, shall be used.
- 6.3.1.1. During the testing of the front fog lamp the power supply for this filament lamp shall be regulated so as to obtain the reference luminous flux at 13.2 V as indicated in the relevant data sheet of UN Regulation No. 37.
- 6.3.1.2. During the testing of a front fog lamp where the filament lamp cannot be replaced, the voltage at the terminals of the front fog lamp shall be regulated at 13.2 V.
- 6.3.2. The front fog lamp shall be deemed satisfactory if the photometric requirements are met with at least one standard filament lamp.
- 6.3.3. The aiming screen for visual adjustment (see Annex 4 to this Regulation) shall be positioned at either a distance of 10 m or a distance of 25 m in front of the front fog lamp.
- 6.3.3.1. The beam shall produce on this aiming screen, over a width of not less than 5.0° on both sides of the line v, a symmetrical and substantially horizontal cut-off to enable visual vertical adjustment.
- 6.3.3.2. The front fog lamp shall be so adjusted that the cut-off on the aiming-screen is 1.15° below the line h.
- 6.3.4. When so adjusted, the front fog lamp shall meet the requirements in paragraph 6.3.5. below.
- 6.3.5. The illumination (see Annex 4, paragraph 2.1.) shall meet the following requirements:

<i>Designated lines or zones</i>	<i>Vertical position*</i>	<i>Horizontal position*</i>	<i>Luminous intensity</i>	<i>To comply</i>
Line 1	15° U to 60° U	0°	145 cd max	All line
Zone A	0° to 1.75° U	5° L to 5°R	85 cd min	Whole zone
Zone B	0° to 3.5° U	26°L to 26°R	570 cd max	Whole zone
Zone C	3.5° U to 15° U	26°L to 26°R	360 cd max	Whole zone
Zone D	1.75° D to 3.5° D	12°L to 12°R	1,700 cd min 11,500 cd max	At least one point on each vertical line
Zone E	1.75° D to 3.5° D	12°L to 22°L and 12°R to 22°R	810 cd min 11,500 cd max	At least one point on each vertical line

* The co-ordinates are specified in degrees for an angular web with a vertical polar axis.

The luminous intensity shall be measured in either white or selective yellow light as prescribed by the manufacturer for use of the front fog lamp in normal service.

Variations detrimental to satisfactory visibility in either of the Zones B and C are not permitted.

- 6.3.6. In the light-distribution as specified in the table in paragraph 6.3.5. above, single narrow spots or stripes inside the area above 15° with not more than 230 cd are allowed, if not extending beyond a conical angle of 2° aperture or a width of 1°. If multiple spots or stripes are present they shall be separated by a minimum angle of 10°.

- 6.4. In the case of Class F3 front fog lamps:
- 6.4.1. Depending on the light source, the following conditions shall apply.
- 6.4.1.1. In the case of replaceable filament light sources:
- 6.4.1.1.1. The front fog lamp shall comply with the requirements of paragraph 6.4.3. of this Regulation with at least one complete set of appropriate standard (étalon) lamps, which may be supplied by the manufacturer or applicant.
- In the case of filament lamps operating directly under vehicle voltage system conditions:
- The front fog lamp shall be checked by means of colourless standard (etalon) filament lamps as specified in UN Regulation No. 37.
- During the testing of the front fog lamp, the power supply to the filament lamp(s) shall be regulated so as to obtain the reference luminous flux at 13.2 V as indicated on the relevant data sheet of UN Regulation No. 37.
- 6.4.1.1.2. In the case of a system that uses a light source control gear being part of the lamp, the voltage declared by the applicant shall be applied to the input terminals of that lamp.
- 6.4.1.1.3. In the case of a system that uses a light source control gear not being part of the lamp the voltage declared by the applicant shall be applied to the input terminals of that light source control gear. The test laboratory shall require from the applicant the special light source control gear needed to supply the light source and the applicable functions. The identification of that light source control gear if applicable and/or the voltage applied including the tolerances shall be noted in the communication form in Annex 1 to this Regulation.
- 6.4.1.2. In the case of a gas-discharge light source:
- A standard light source shall be used as specified in UN Regulation No. 99, which has been aged during at least 15 cycles, in accordance with paragraph 4. of Annex 4 to UN Regulation No. 99.
- During testing of the front fog lamp the voltage at the terminals of the ballast or at the terminals of the light source in case the ballast is integrated with the light source shall be regulated to maintain 13.2 V for a 12 V system, or at the vehicle voltage as specified by the applicant, with a tolerance of ± 0.1 V.
- The objective luminous flux of the gas-discharge light source may differ from that specified in UN Regulation No. 99. In this case, the luminous intensity values shall be corrected accordingly.
- 6.4.1.3. In the case of non-replaceable light sources:
- All measurements on front fog lamps equipped with non-replaceable light sources shall be made at 6.3 V, 13.2 V or 28.0 V or at other vehicle voltage as specified by the applicant. The test laboratory may require from the applicant the special power supply needed to supply the light sources. The test voltages shall be applied to the input terminals of the lamp.
- 6.4.1.4. In the case of LED modules:
- All measurements on front fog lamps equipped with LED module(s) shall be made at 6.3 V, 13.2 V or 28.0 V respectively, if not otherwise specified within this Regulation. LED modules operated by an electronic light source control gear shall be measured with the input voltage as specified by the applicant or with a supply and operating device which replace this control gear for the photometric test. The relevant input parameters (e.g. duty cycle, frequency, pulse shape, peak voltage) shall be specified and stated in the communication form, item 10.6., in Annex 1 to this Regulation.

- 6.4.1.5. Compliance with the requirements of paragraph 5.8.1. shall be verified at least with respect to the values in lines 3 and 4 of the table of paragraph 6.4.3.
- 6.4.2. Photometric adjustment and measuring conditions
- 6.4.2.1. The aiming screen for visual adjustment (see Annex 4, paragraph 2.2.) shall be positioned at either a distance of 10 m or a distance of 25 m in front of the front fog lamp.
- 6.4.2.2. The beam shall produce on this aiming screen, over a width of not less than 5.0 degrees on both sides of the line v, a symmetrical and substantially horizontal cut-off to enable visual vertical adjustment. In the case that visual aim leads to problems or ambiguous positions, the measurement of the cut-off quality and the instrumental method as specified in paragraphs 4. and 5. of Annex 9 shall be applied.
- 6.4.2.3. The front fog lamp shall be adjusted so that the cut-off on the screen is 1° below the line h according to the requirements in paragraph 2. of Annex 9.
- 6.4.3. Photometric requirements

When so adjusted, the front fog lamp shall meet the photometric requirements in the table below (refer also to paragraph 2.2. of Annex 4 to this Regulation):

Designated lines or zones	Vertical position* above h + below h -	Horizontal position* left of v: - right of v: +	Luminous intensity (in cd)	To comply
Point 1, 2**	+60°	±45°	85 max	All points
Point 3, 4**	+40°	±30°		
Point 5, 6**	+30°	±60°		
Point 7, 10**	+20°	±40°		
Point 8, 9**	+20°	±15°		
Line 1**	+8°	-26° to +26°	130 max	All line
Line 2**	+4°	-26° to +26°	150 max	All line
Line 3	+2°	-26° to +26°	245 max	All line
Line 4	+1°	-26° to +26°	360 max	All line
Line 5	0°	-10° to +10°	485 max	All line
Line 6 ***	-2.5°	-10° to +10°	2,000 min	All line
Line 7 ***	-6.0°	-10° to +10°	< 50 per cent of max. on line 6	All line
Line 8L and R***	-1.5° to -3.5°	-22° and +22°	1,100 min	One or more points
Line 9L and R***	-1.5° to -4.5°	-35° and +35°	450 min	One or more points
Zone D***	-1.5° to -3.5°	-10° to +10°	12,000 max	Whole zone

* The co-ordinates are specified in degrees for an angular web with a vertical polar axis.

** See paragraph 6.4.3.4.

*** See paragraph 6.4.3.2.

- 6.4.3.1. The luminous intensity shall be measured either with white light or coloured light as prescribed by the applicant for use of the fog lamp in normal service. Variations in homogeneity detrimental to satisfactory visibility in the zone above the line 5 from 10 degrees left to 10 degrees right are not permitted.
- 6.4.3.2. At the request of the applicant, two front fog lamps constituting a matched pair corresponding to paragraph 4.2.2.5. of this Regulation may be tested separately. In this case the specified requirements for lines 6, 7, 8, 9 and the Zone D in the table in paragraph 6.4.3. above apply to half the sum of readings of the right-hand and left-hand side front fog lamp. However each of the two front fog lamps shall meet at least 50 per cent of the minimum value required for line 6. Additionally, each of the two front fog lamps that constitute the matched pair corresponding to paragraph 4.2.2.5. of this Regulation are only required to meet the requirements of line 6 and line 7 from 5° inwards to 10° outwards.
- 6.4.3.3. Inside the field between lines 1 to 5 in Figure 3 of Annex 4, the beam pattern should be substantially uniform. Discontinuities in intensities detrimental to satisfactory visibility between the lines 6, 7, 8 and 9 are not permitted.
- 6.4.3.4. In the light-distribution as specified in the table in paragraph 6.4.3. above, single narrow spots or stripes inside the area including the measuring points 1 to 10 and line 1 or inside the area of line 1 and line 2 with not more than 175 cd are allowed, if not extending beyond a conical angle of 2° aperture or a width of 1°. If multiple spots or stripes are present they shall be separated by a minimum angle of 10°.
- 6.4.3.5. If the specified luminous intensity requirements are not met, a re-aim of the cut-off position within $\pm 0.5^\circ$ vertical and/or $\pm 2^\circ$ horizontal is allowed. In the re-aimed position all photometric requirements shall be met.
- 6.4.4. Other photometric requirements
- 6.4.4.1. In the case of front fog lamps equipped with gas-discharge light sources with the ballast not integrated with the light source, the luminous intensity shall exceed 1,080 cd in the measuring point at 0° horizontal and 2° D vertical, four seconds after activation of the fog lamp which has not been operated for 30 minutes or more.
- 6.4.4.2. To adapt to dense fog or similar conditions of reduced visibility, it is permitted to automatically vary the luminous intensities provided that:
- (a) An active electronic light source control gear is incorporated into the front fog lamp function system;
 - (b) All intensities are varied proportionately.
- The system, when checked for compliance according to the provisions of paragraph 6.4.1.1.2. above, is considered acceptable if the luminous intensities remain within 60 per cent and 100 per cent of the values specified in the table in paragraph 6.4.3.
- 6.4.4.2.1. An indication shall be inserted in the communication form (Annex 1, item 10.).
- 6.4.4.2.2. The Technical Service responsible for type approval shall verify that the system provides automatic modifications, such that good road illumination is achieved and no discomfort is caused to the driver or to other road users.
- 6.4.4.2.3. Photometric measurements shall be performed according to the applicant's description.

7. Colour

The colour of the light emitted by the front fog lamp shall be either white or selective yellow by choice of the applicant. The selective yellow colour, if any, of the beam may be obtained either by the colour of the light source or by the lens of the front fog lamp or by any other suitable means.

- 7.1. The colorimetric characteristics of the front fog lamp shall be measured with voltages as defined in paragraphs 6.3. and 6.4. of this Regulation.

8. Determination of discomfort (dazzle)

The discomfort dazzle caused by the front fog lamp shall be determined.⁷

9. Modifications of the type of front fog lamp and extension of approval

- 9.1. Every modification of the type of front fog lamp shall be notified to the Type Approval Authority which approved the type of front fog lamp. The Type Approval Authority may then either:
- 9.1.1. Consider that the modifications made are unlikely to have an appreciable adverse effect and that in any case the front fog lamp still complies with the requirements;
- or
- 9.1.2. Require a further test report from the Technical Service responsible for conducting the tests.
- 9.2. Confirmation or refusal of approval, specifying the alterations, shall be communicated by the procedure specified in paragraph 4.1.4. of this Regulation to the Parties to the Agreement which apply this Regulation.
- 9.3. The Type Approval Authority issuing the extension of approval shall assign a series number for such an extension and inform thereof the other Parties to the 1958 Agreement applying this Regulation by means of a communication form conforming to the model in Annex 1 to this Regulation.

10. Conformity of production

- 10.1. Front fog lamps shall be so manufactured as to conform to the type approved under this Regulation.
- The compliance with the requirements set forth in paragraphs 6. and 7. above shall be verified as follows:
- 10.1.1. The minimum requirements for Conformity of Production (CoP) control procedures set forth in Annex 7 to this Regulation shall be complied with.
- 10.1.2. The minimum requirements for sampling by an inspector set forth in Annex 8 to this Regulation shall be complied with.
- 10.2. In order to verify that the requirements of paragraph 10.1. above are met, suitable controls of the production shall be carried out.
- 10.3. The holder of the approval shall in particular:

⁷ This determination will be the subject of a recommendation to Type Approval Authorities.

- 10.3.1. Ensure the existence of procedures for the effective control of the quality of products;
- 10.3.2. Have access to the control equipment necessary for checking the conformity to each approved type;
- 10.3.3. Ensure that data of test results are recorded and that related documents shall remain available for a period to be determined in accordance with the Type Approval Authority;
- 10.3.4. Analyse the results of each type of test in order to verify and ensure the stability of the product characteristics making allowance for variation of an industrial production;
- 10.3.5. Ensure that for each type of product at least the tests prescribed in Annex 7 to this Regulation with the tolerances as prescribed in Annex 2 to this Regulation are carried out;
- 10.3.6. Ensure that any collecting of samples giving evidence of non-conformity with the type of test considered shall give rise to another sampling and another test. All the necessary steps shall be taken to re-establish the conformity of the corresponding production.
- 10.4. The Type Approval Authority which has granted type approval may at any time verify the conformity control methods applicable to each production unit.
 - 10.4.1. In every inspection, the test books and production survey records shall be presented to the visiting inspector.
 - 10.4.2. The inspector may take samples at random to be tested in the manufacturer's laboratory. The minimum number of samples may be determined in the light of the results of the manufacturer's own checks.
 - 10.4.3. When the quality level appears unsatisfactory or when it seems necessary to verify the validity of the tests carried out in the application of paragraph 10.4.2. above, the inspector shall select samples, to be sent to the Technical Service that has conducted the type approval tests, using the criteria of Annex 7 to this Regulation with the tolerances as prescribed in Annex 2 to this Regulation.
 - 10.4.4. The Type Approval Authority may carry out any test prescribed in this Regulation. These tests will be on samples selected at random without causing distortion of the manufacturer's delivery commitments and in accordance with the criteria of Annex 7 to this Regulation with the tolerances as prescribed in Annex 2 to this Regulation.
 - 10.4.5. The Type Approval Authority shall strive to obtain a frequency of inspection of once every two years. However, this is at the discretion of the Type Approval Authority and their confidence in the arrangements for ensuring effective control of the conformity of production. In the case where negative results are recorded, the Type Approval Authority shall ensure that all necessary steps are taken to re-establish the conformity of production as rapidly as possible.
- 10.5. Front fog lamps with apparent defects are disregarded.

11. Penalties for non-conformity of production

- 11.1. The approval granted in respect of a type of front fog lamp pursuant to this Regulation may be withdrawn if the requirements set forth above are not met, or if a front fog lamp bearing the approval mark does not conform to the type approved.

- 11.2. If a Contracting Party to the Agreement applying this Regulation withdraws an approval it has previously granted, it shall forthwith so notify the other Contracting Parties applying this Regulation, by means of a communication form conforming to the model in Annex 1 to this Regulation.

12. Production definitively discontinued

If the holder of the approval completely ceases to manufacture a front fog lamp approved in accordance with this Regulation, he shall so inform the Type Approval Authority which granted the approval. Upon receiving the relevant communication that Authority shall inform thereof the other Parties to the 1958 Agreement which apply this Regulation, by means of a communication form conforming to the model in Annex 1 to this Regulation.

13. Names and addresses of Technical Services responsible for conducting approval tests, and of Type Approval Authorities

The Contracting Parties to the 1958 Agreement which apply this Regulation shall communicate to the United Nations Secretariat the names and addresses of the Technical Services responsible for conducting approval tests and of the Type Approval Authorities which grant approval and to which forms certifying approval or extension or refusal or withdrawal of approval, or production definitively discontinued, issued in other countries, are to be sent.

14. Transitional provisions⁸

- 14.1. As from 24 months after the official date of entry into force of UN Regulation No. 149, Contracting Parties applying this Regulation shall cease to grant approvals to this Regulation.
- 14.2. Contracting Parties applying this Regulation shall not refuse to grant extensions of approval to this and any previous series of amendments of this Regulation.
- 14.3. Contracting Parties applying this Regulation shall continue to grant approvals for devices on basis of this and any previous series of amendments to this Regulation, provided that the devices are intended as replacements for fitting to vehicles in use.
- 14.4. Contracting Parties applying this Regulation shall continue to allow fitting or use on a vehicle in use of a device approved to this Regulation as amended by any previous series of amendments, provided that the device is intended for replacement.

⁸ The 05 series of amendments does not require changes in the approval number (TRANS/WP.29/815, para. 82).

Annex 1

Communication

(Maximum format: A4 (210 x 297 mm))



issued by: Name of administration:

.....
.....
.....

Concerning:² Approval granted
Approval extended
Approval refused
Approval withdrawn
Production definitively discontinued

of a type of front fog lamp pursuant to UN Regulation No. 19

Approval No..... Extension No.....

1. Trade name or mark of the device:
2. Type of the device:
3. Manufacturer's name for the type of device:
4. Manufacturer's name and address:
5. If applicable, name and address of the manufacturer's representative:
6. Submitted for approval on:
7. Technical Service responsible for conducting approval tests:
8. Date of report issued by that Service:
9. Number of report issued by that Service:
10. Concise description:
- 10.1. Class as described by the relevant marking:
(B, B/, BPL, B/PL, F3, F3, F3/, F3PL, F3/PL)
- 10.2. Number and category(ies) of filament lamp(s):
- 10.3. LED module(s): yes/no² and for each LED module a statement whether it is
replaceable or not: yes/no²

¹ Distinguishing number of the country which has granted/refused/withdrawn approval (see approval provisions in the Regulation).

² Strike out which does not apply.

- 10.4. LED module identification code:
- 10.5. Application of electronic light source control gear:³ yes/no²
- Supply to the light source:
- Specification of the light source control gear:
- Input voltage:⁴
- In the case of an electronic light source control gear not being part of the lamp:
- Output signal specification:
- 10.6. Colour of light emitted: white/selective yellow²
- 10.7. Luminous flux of the light source (see paragraph 5.9.)
 greater than 2,000 lumens: ... yes/no²
- 10.8. Luminous intensity is variable: ... yes/no²
- 10.9. The determination of the cut-off gradient (if measured)
 was carried out at 10 m / 25 m²
11. Position of the approval mark:
12. Reason(s) for extension (if applicable):
13. Approval granted/extended/refused/withdrawn²
14. Place:
15. Date:
16. Signature:
17. The list of documents deposited with the Type Approval Authority, which has granted approval, is annexed to this communication and may be obtained on request.

³ The voltage specifications shall include the tolerances or voltage range as specified by the manufacturer and verified by this approval.

⁴ The parameters of the input voltage including duty cycle, frequency, pulse shape and peak voltage shall be included.

Annex 2

Tolerance requirements for conformity of production control procedure

1. In the case of Class B front fog lamps:
 - 1.1. When testing photometric performances of any front fog lamp chosen at random and equipped with a standard filament lamp, no measured value may deviate unfavourably by more than 20 per cent from the value prescribed in this Regulation.
 - 1.2. For the periodic records, the reading is limited to points B50¹ and left and right bottom corners of zone D (see Figure 2 in Annex 4).
2. In the case of Class F3 front fog lamps:
 - 2.1. When testing the photometric performances of any front fog lamp chosen at random according to paragraph 6.4. of this Regulation, no measured value of the luminous intensity may deviate unfavourably by more than 20 per cent.
 - 2.2. When testing the photometric performances of any front fog lamp chosen at random according to paragraph 6.4. of this Regulation, no measured value of the luminous intensity may deviate unfavourably by more than 20 per cent.
 - 2.3. For the measured values in the table according to paragraph 6.4.3. of this Regulation the respective maximum deviations may be:

Designated lines or zones	Vertical position* above h + below h -	Horizontal position* left of v: - right of v: +	Luminous intensity candela		To comply
			Equivalent 20 per cent	Equivalent 30 per cent	
Point 1, 2**	+60°	±45°	115 max	130 max	All points
Point 3, 4**	+40°	±30°			
Point 5, 6**	+30°	±60°			
Point 7, 10**	+20°	±40°			
Point 8, 9**	+20°	±15°			
Line 1**	+8°	-26° to +26°	160 max	170 max	All line
Line 2**	+4°	-26° to +26°	180 max	195 max	All line
Line 3	+2°	-26° to +26°	295 max	320 max	All line
Line 4	+1°	-26° to +26°	435 max	470 max	All line
Line 5	0°	-10° to +10°	585 max	630 max	All line
Line 6***	-2.5°	from 5° inwards to 10° outwards	2,160 min	1,890 min	All line
Line 8 L and R***	-1.5° to -3.5°	-22° and +22°	880 min	770 min	One or more points

¹ The point B 50 corresponds to the coordinates horizontal 0°, vertical 0.86°U.

<i>Designated lines or zones</i>	<i>Vertical position*</i> <i>above h +</i> <i>below h -</i>	<i>Horizontal position*</i> <i>left of v: -</i> <i>right of v: +</i>	<i>Luminous intensity candela</i>		<i>To comply</i>
			<i>Equivalent</i> <i>20 per cent</i>	<i>Equivalent</i> <i>30 per cent</i>	
Line 9 L and R***	-1.5° to -4.5°	-35° and +35°	360 min	315 min	One or more points
Zone D	-1.5° to -3.5 °	-10° to +10°	14,400 max	15,600 max	Whole zone

* The co-ordinates are specified in degrees for an angular web with a vertical polar axis.

** See paragraph 6.4.3.4. of this Regulation.


*** See paragraph 6.4.3.2. of this Regulation.

- 2.4. For the periodic records, the photometric measurements for verification of conformity shall at least yield data for the points 8 and 9, and the lines 1, 5, 6, 8 and 9 as specified in paragraph 6.4.3. of this Regulation.

Annex 3

Examples of arrangements of approval marks for front fog lamps of Class B and Class F3

Figure 1

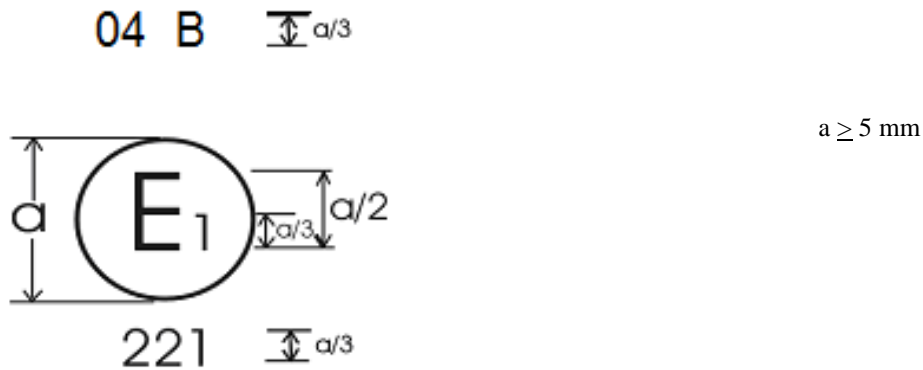


The device bearing the above approval marking is a fog lamp of Class "B" approved in the Germany (E 1) under number 221, in accordance with this Regulation.

The number mentioned close to the symbol "B" indicates that the approval was granted in accordance with the requirements of this Regulation as amended by the 04 series of amendments.¹

Figure 1 indicates that the device is a front fog lamp, which can be lit simultaneously with any other lamp with which it may be reciprocally incorporated.

Figure 2a

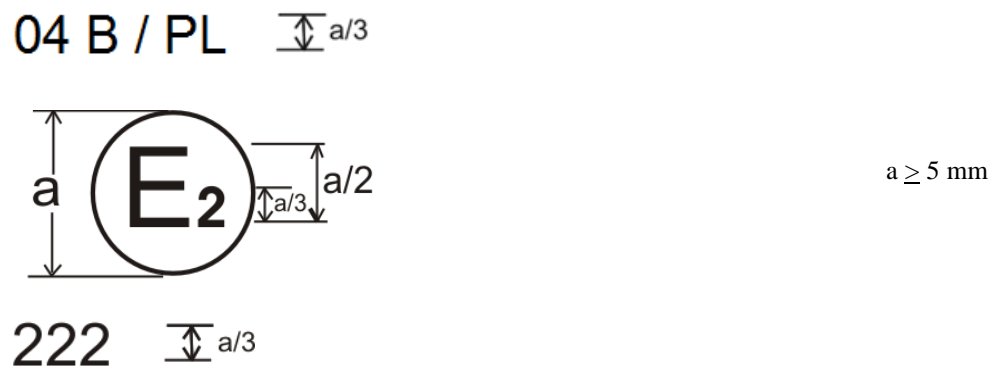

¹ The 05 series of amendments does not require changes in the approval number (TRANS/WP.29/815, para. 82).


Figure 2b



Figures 2a and 2b indicate that the device is a front fog lamp approved in the France (E 2) under number 222, in accordance with this Regulation incorporating a lens of plastic material and that it cannot be lit simultaneously with any other lamp with which it may be reciprocally incorporated.

Note: The approval number and the additional symbols shall be placed close to the circle and either above or below the letter "E", or to the right or left of that letter. The digits of the approval number shall be on the same side of the letter "E" and face the same direction. The use of Roman numerals as approval numbers should be avoided so as to prevent any confusion with other symbols.

Figure 3
Examples of possible markings for grouped, combined or reciprocally incorporated lamps situated on the front of a vehicle

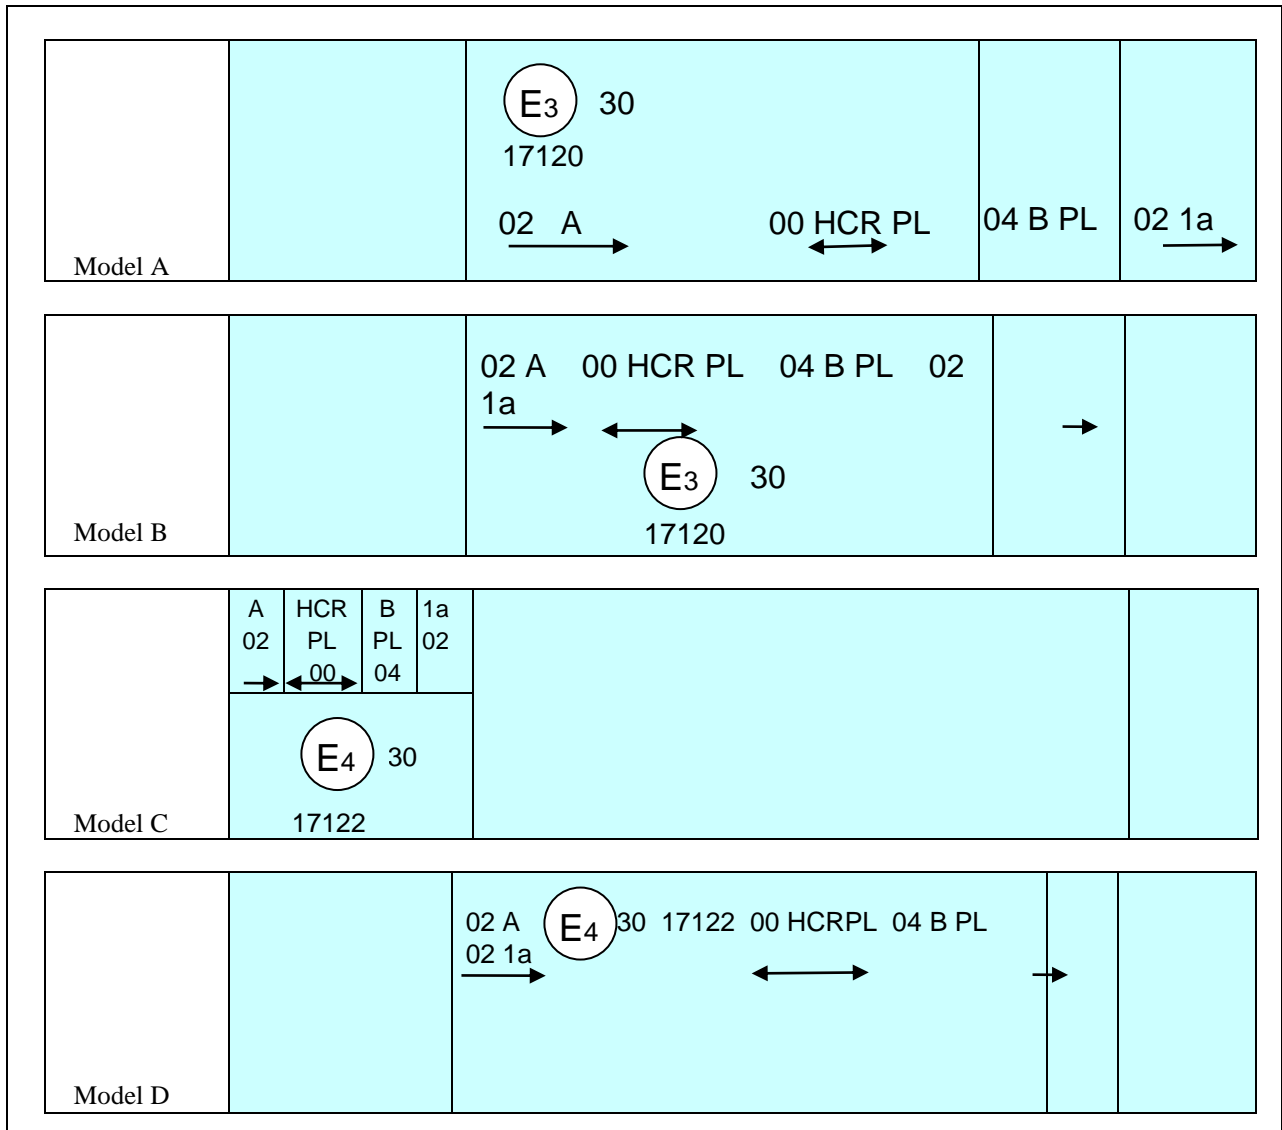

The vertical and horizontal lines indicate a schematic view of the shape of the light-signalling device. These are not part of the approval mark.

The devices shown in Model A and Model B of Figure 3 bear the approval markings for a fog lamp approved in Italy (E 3) under number 17120, in accordance with this Regulation.

The devices shown in Model C and Model D of Figure 3 bear the approval markings for a fog lamp approved in the Netherlands (E 4) under number 17122, in accordance with this Regulation.

Note: The four examples shown in Figure 3 correspond to a lighting device bearing an approval mark relating to:

A front position lamp approved in accordance with the 02 series of amendments to UN Regulation No.7;


A headlamp with a passing-beam designed for right-hand and left-hand traffic and a driving-beam with a maximum intensity comprised between 86,250 and 101,250 candelas (as indicated by the number 30) approved in

accordance with the 00 series of amendments to UN Regulation No. 112 and incorporating a lens of plastic material;

A *front fog lamp* approved in accordance with the 04 series of amendments to this Regulation¹ and incorporating a lens of plastic material;

A *front direction indicator lamp* of category 1a approved in accordance with the 02 series of amendments to UN Regulation No. 6.

Figure 4
Lamp reciprocally incorporated with a headlamp

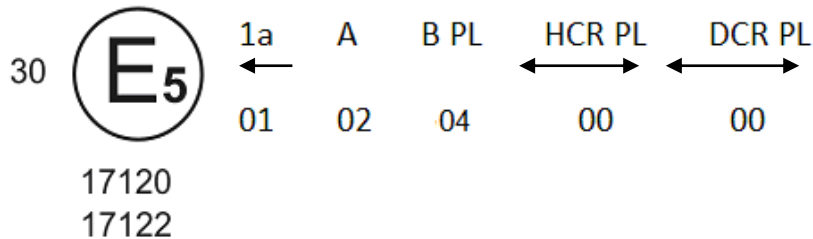

The example in Figure 4 corresponds to the marking of a lens of plastic material intended for use in different types of headlamps, namely:

Either:

A headlamp with a passing-beam designed for right-hand and left-hand traffic and a driving-beam with a maximum intensity comprised between 86,250 and 101,250 candelas, approved in Sweden (E 5) in accordance with the requirements of UN Regulation No. 112 as amended by the 00 series of amendments, which is reciprocally incorporated with a front fog lamp approved in accordance with the 04 series of amendments to this Regulation;¹

Or:

A headlamp with a passing-beam designed for right-hand and left-hand traffic and a driving-beam, approved in Sweden (E 5) in accordance with the requirements of UN Regulation No. 98 as amended by the 00 series of amendments, which is reciprocally incorporated with the same front fog lamp as above;


Or even:

Either of the above-mentioned headlamps approved as a single lamp.

The main body of the headlamp shall bear only the valid approval number. Examples of such valid markings are shown in Figure 5.


Figure 5

Lighting device used either as front fog lamp or as reversing lamp

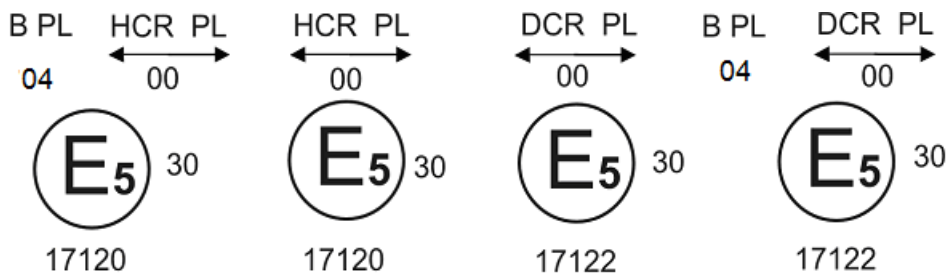

The device bearing the approval marking in Figure 6 is a lamp approved in Belgium (E 6) under number 17120 and 17122, in accordance with this Regulation and, in accordance with UN Regulation No. 23 (reversing lamps):


Figure 6

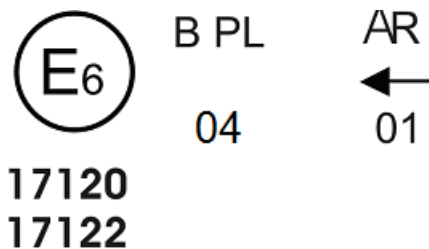

One of the above-mentioned lamps approved as a single lamp can be used only as a front fog lamp or as a reversing lamp.

Figure 7

Examples of arrangements of approval marks for front fog lamps of Class "F3"

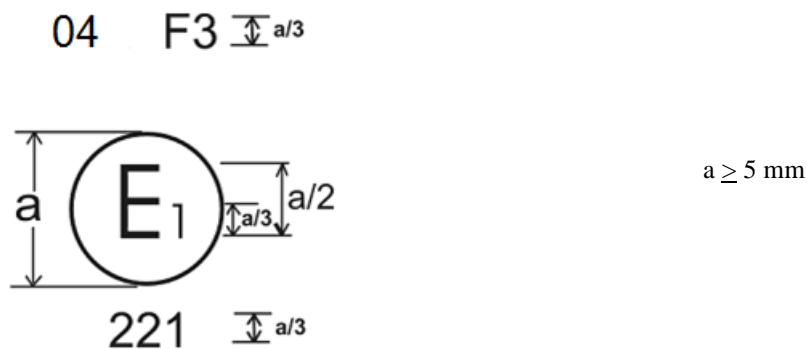

The device bearing the approval marking shown in Figure 7 is a fog lamp of Class "F3" approved in Germany (E 1) under number 221, in accordance with this Regulation.

The number mentioned close to the symbol "F3" indicates that the approval was granted in accordance with the requirements of this Regulation as amended by the 04 series of amendments.¹

The marking in Figure 7 indicates that the device is a front fog lamp, which can be lit simultaneously with any other lamp with which it may be reciprocally incorporated.

Figure 8a




Figure 8b




$a \geq 5 \text{ mm}$

The device bearing the approval marking shown in Figures 8a and 8b is a fog lamp of Class "F3", having a plastic lens and approved in France (E 2) under number 222, in accordance with this Regulation. The number mentioned close to the symbol "F3" indicates that the approval was granted in accordance with the requirements of this Regulation as amended by the 04 series of amendments.¹

Figures 8a and 8b indicate that the device is a front fog lamp incorporating a lens of plastic material and that it cannot be lit simultaneously with any other lamp with which it may be reciprocally incorporated.

Note: The approval number and the additional symbols shall be placed close to the circle and either above or below the letter "E", or to the right or left of that letter. The digits of the approval number shall be on the same side of the letter "E" and face the same direction. The use of Roman numerals as approval numbers should be avoided so as to prevent any confusion with other symbols.

Figure 9
Examples of possible markings for grouped, combined or reciprocally incorporated lamps situated on the front of a vehicle

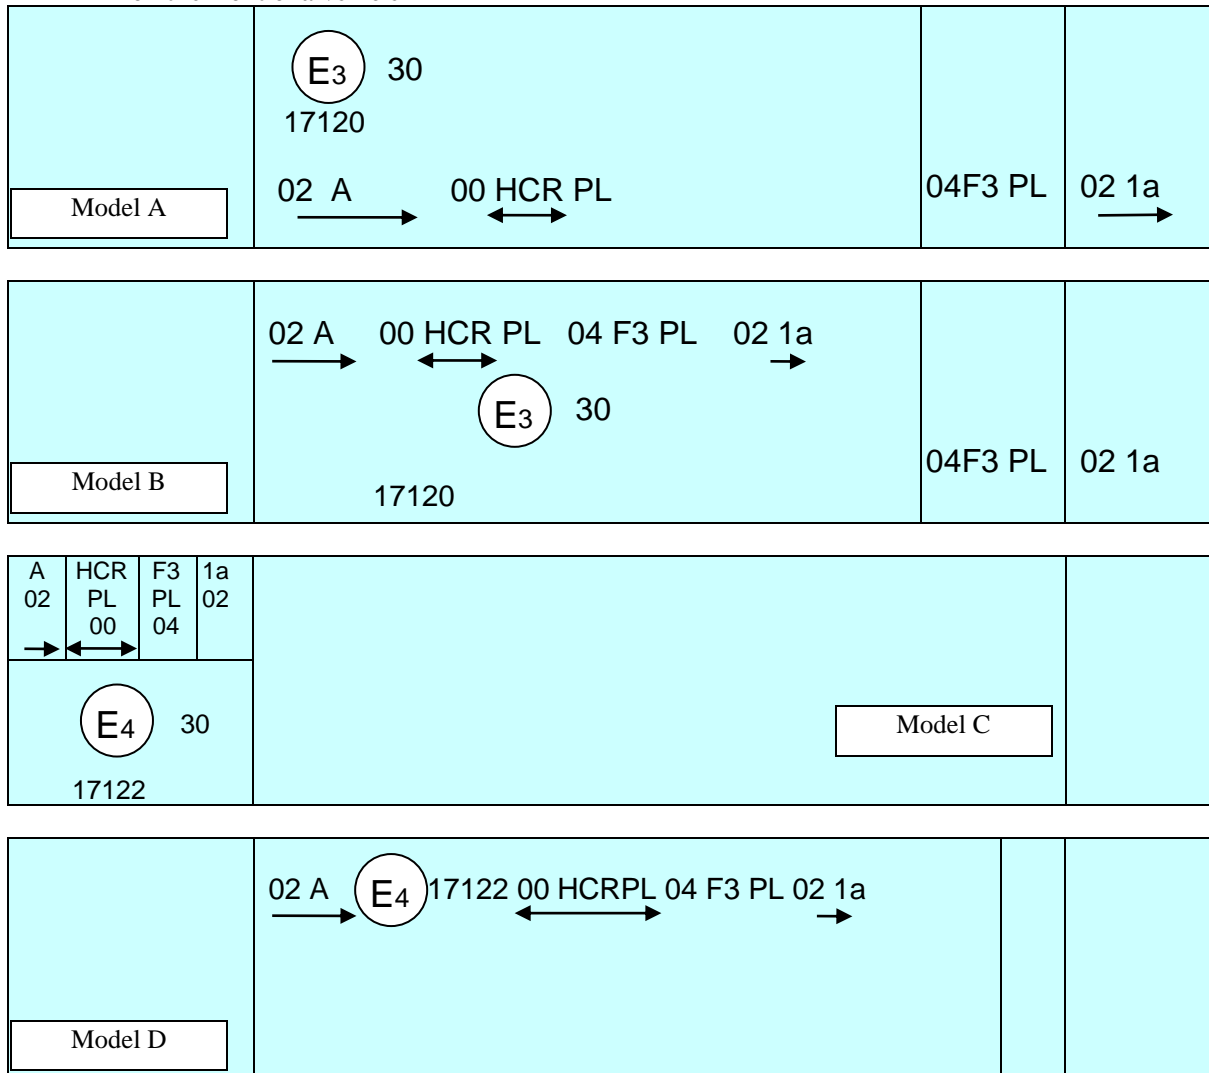

The vertical and horizontal lines indicate a schematic view of the shape of the light-signalling device. These are not part of the approval mark.

The device bearing the approval marking shown in Models A and B in Figure 9 is a fog lamp approved in Italy (E 3) under number 17120 and comprising:

A front position lamp approved in accordance with the 02 series of amendments to UN Regulation No. 7;

A headlamp with a passing-beam designed for right-hand and left-hand traffic and a driving-beam with a maximum intensity comprised between 86,250 and 101,250 candelas (as indicated by the number 30) approved in accordance with the 00 series of amendments to UN Regulation No. 112 and incorporating a lens of plastic material;

A front fog lamp approved in accordance with the 04 series of amendments to this Regulation¹ and incorporating a lens of plastic material;


A front direction indicator lamp of category 1a approved in accordance with the 02 series of amendments to UN Regulation No. 6.

The device bearing the approval marking in Models C and D in Figure 9 is a device approved in the Netherlands (E 4) under number 17122, in accordance with this Regulation used and shows a slightly different arrangement to that shown in Models A and B.

Lighting device used either as front fog lamp or as reversing lamp

The device bearing the approval marking shown in Figure 10 is a lamp approved in Sweden (E 5) under number 17120 and 17122, in accordance with UN Regulation No. 19 and, in accordance with UN Regulation No. 23 (reversing lamps):

Figure 10

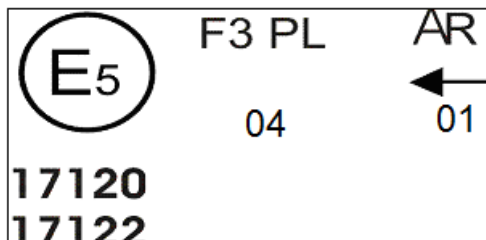

One of the above-mentioned lamps approved as a single lamp can be used only as a front fog lamp or as a reversing lamp.

Front fog lamp reciprocally incorporated with a headlamp

The devices bearing the approval marking shown in Figure 11 have been approved in Belgium (E 6) under number 17120 or 17122, in accordance with the relevant Regulations.

Figure 11



The above example corresponds to the marking of a lens of plastic material to be used in different types of headlamps, namely:

Either:

A headlamp with a passing-beam designed for right-hand and left-hand traffic and a driving-beam with a maximum intensity comprised between 86,250 and 101,250 candelas, approved in Belgium (E 6) in accordance with the requirements of UN Regulation No. 112 (Table B) as amended by the 00 series of amendments, which is reciprocally incorporated with a front fog lamp approved in accordance with the 04 series of amendments to this Regulation;¹

Or:


A headlamp with a passing-beam designed for right-hand and left-hand traffic and a driving-beam, approved in Belgium (E6) in accordance with the requirements of UN Regulation No. 98 as amended by the 00 series of amendments, which is reciprocally incorporated with the same front fog lamp as above;

Or even:

Either of the above-mentioned headlamps approved as a single lamp.

The main body of the headlamp shall bear only the valid approval number. Examples of such valid markings are shown in Figure 12.

Figure 12

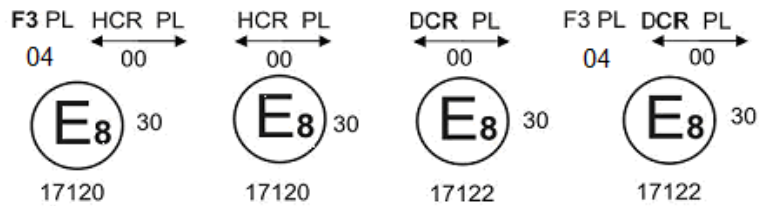

The above example corresponds to devices approved in Czech Republic (E 8).

LED modules

Figure 13


MD E8 17325

The LED module bearing the identification code shown in Figure 13 has been approved together with a lamp approved in Czech Republic (E 8) under approval number 17325.

Front fog lamps as a matched pair

The approval marking shown below identifies a front fog lamp carried out as a matched pair and meeting the requirements of this Regulation. The device bearing the approval marking shown in Figure 14 is a front fog lamp approved in Japan (E 43) under number 321.

Figure 14

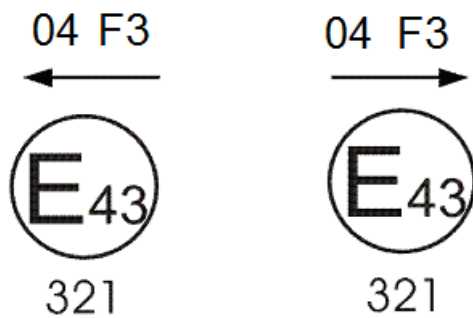


Annex 4

Measuring screen geometry and measuring grid

1. Measuring screen


The co-ordinates are specified in degrees for spherical angles in a web with a vertical polar axis (see Figure 1).

Figure 1

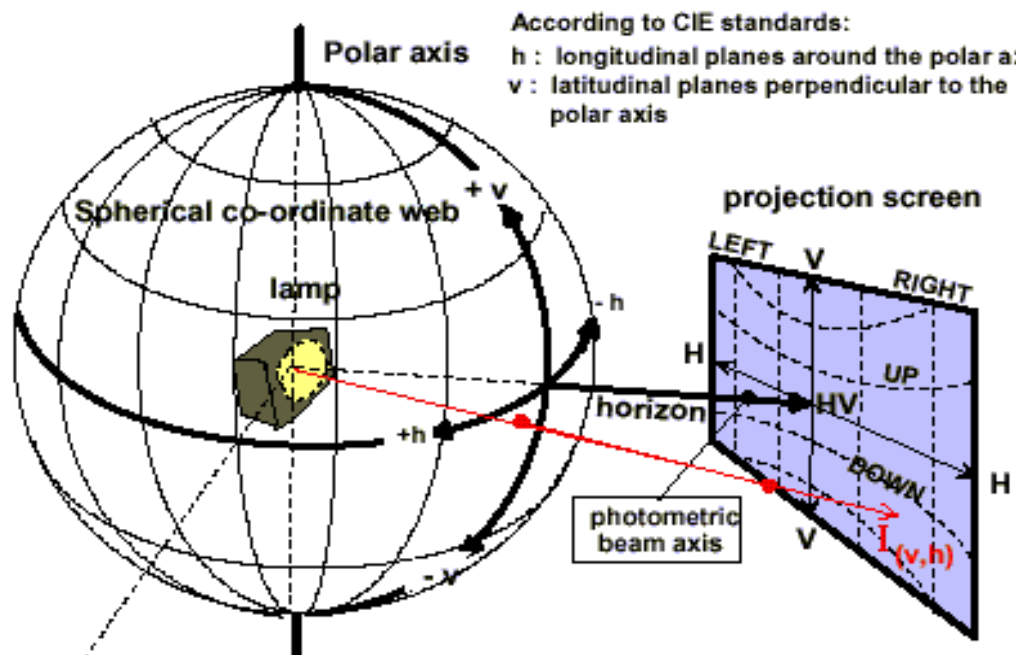


2. Measuring grid (see Figure 2)
- The measuring grid is symmetrical about the v-v line (see table in paragraph 6.4.3. of this Regulation). For simplicity the angular web is shown in the form of a rectangular grid.
- 2.1. In the case of front fog lamps of Class "B", the measuring grid is shown in Figure 2.

Figure 2
Light distribution of the Class B front fog lamp

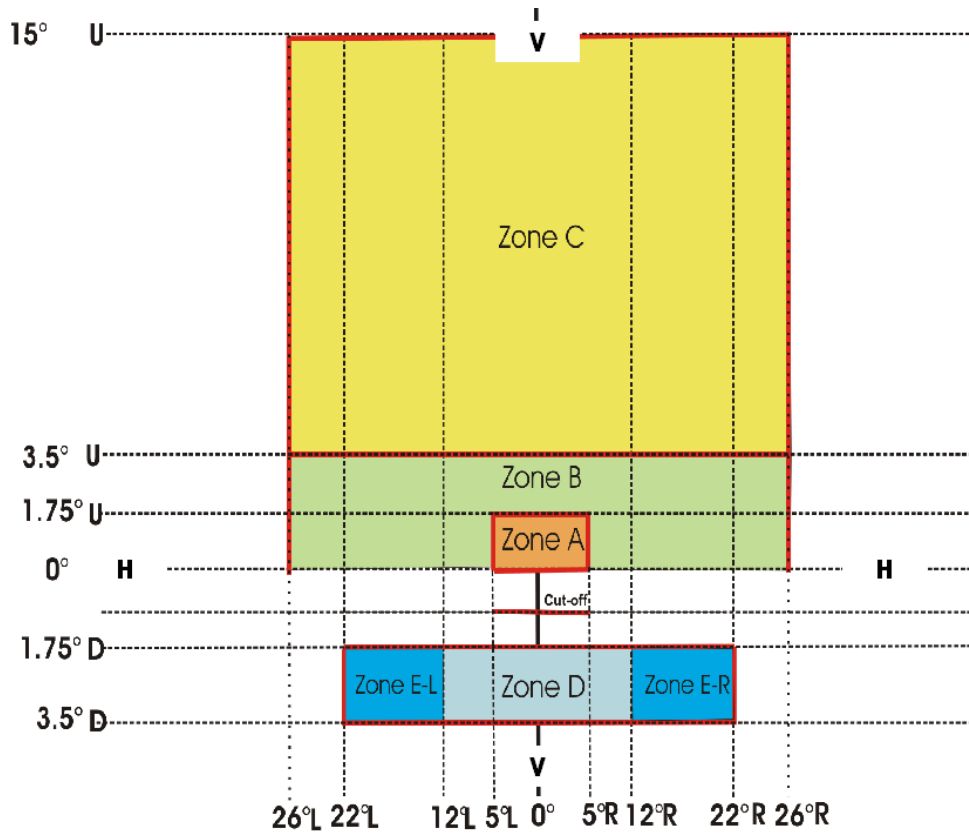

2.2. In the case of front fog lamps of Class "F3", the measuring grid is shown in Figure 3.

Figure 3
 Light distribution of the Class F3 front fog lamp

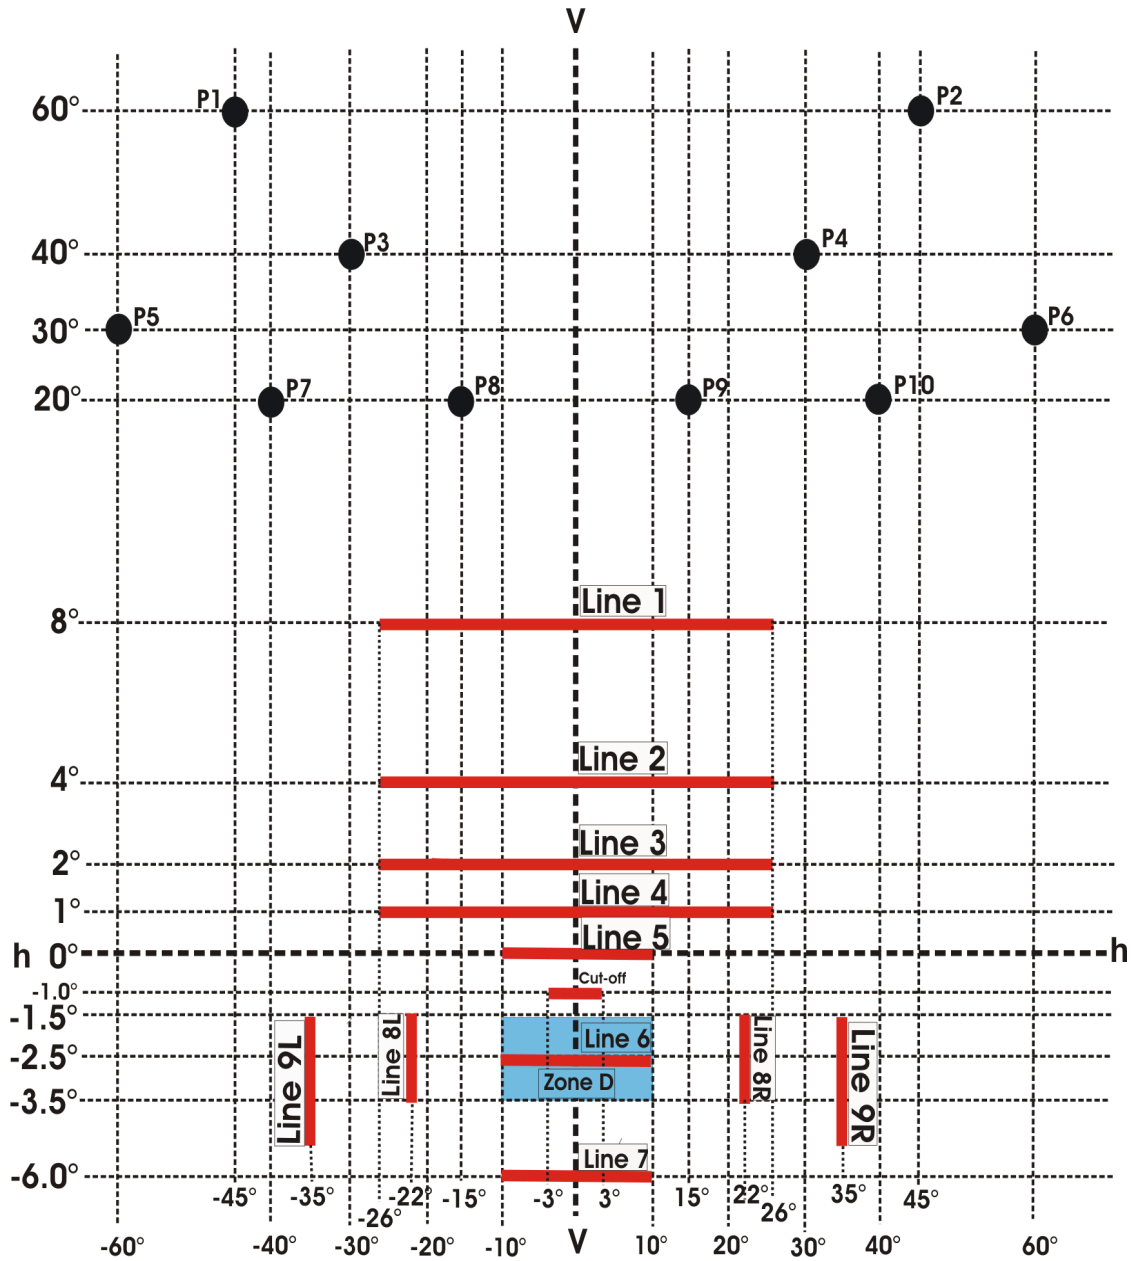

Annex 5

Tests for stability of photometric performance of front fog lamps in operation (tests on complete front fog lamps)

Once the photometric values have been measured according to the prescriptions of this Regulation, in the point of maximum illumination in zone D (E_{\max}) and in the point HV, a complete front fog lamp sample shall be tested for stability of photometric performance in operation. "Complete front fog lamp" is the complete lamp itself including those surrounding body parts and lamps, which could influence its thermal dissipation.

The tests shall be carried out:

- (a) In a dry and still atmosphere at an ambient temperature of $23\text{ °C} \pm 5\text{ °C}$, the test sample being mounted on a base representing the correct installation on the vehicle;
- (b) In case of replaceable light sources: using mass production filament light sources, which have been aged for at least one hour, or mass production gas-discharge light sources, which have been aged for at least 15 hours or mass production LED modules which has been aged for at least 48 hours and cooled down to ambient temperature before starting the tests as specified in this Regulation. The LED modules supplied by the applicant shall be used.

The measuring equipment shall be equivalent to that used during headlamp type-approval tests.

The test sample shall be operated without being dismantled from or readjusted in relation to its test fixture. The light source used shall be a light source of the category specified for that front fog lamp.

1. Test for stability of photometric performance

1.1. Clean front fog lamp

The front fog lamp shall be operated for 12 hours as described in paragraph 1.1.1. and checked as prescribed in paragraph 1.1.2. below.

1.1.1. Test procedure

The front fog lamp shall be operated as follows:

1.1.1.1. In the case where only one lighting function (front fog lamp) is to be approved, the corresponding light source is lit for the prescribed time;¹

1.1.1.2. In the case of more than one lighting function (e.g. a headlamp with one or more driving-beams and/or a front fog lamp): the headlamp shall be subjected to the following cycle until the prescribed time is reached:

- (a) 15 minutes, front fog lamp lit;
- (b) 5 minutes, all filaments lit.

If the applicant declares that only one lighting function is to be used at a time (e.g. only the passing-beam lit or only the driving-beam(s) lit or only the front fog lamp lit¹), the test shall be carried out in accordance with this condition, successively activating the front fog lamp half of the time and one

¹ When the tested front fog lamp includes signalling lamps, the latter shall be lit for the duration of the test, except for a daytime running lamp. In the case of a direction indicator lamp, it shall be lit in flashing operation mode with an on/ off time ratio of approximately one to one.

of the other lighting functions for half the time specified in paragraph 1.1. above.

1.1.1.3. In the case of front fog lamp with a passing-beam and one or more lighting functions (one of them is a front fog lamp):

- (a) The front fog lamp shall be subjected to the following cycle until the time specified is reached:
 - (i) 15 minutes, passing-beam light source(s) lit;
 - (ii) 5 minutes, all light source(s) lit.
- (b) If the applicant declares that the front fog lamp is to be used with only the passing-beam lit or only the front fog lamp² lit at a time, the test shall be carried out in accordance with this condition, successively activating³ the passing-beam half of the time and the front fog lamp for half of the time specified in paragraph 1.1. above. The driving-beam(s) is (are) subjected to a cycle of 15 minutes off and 5 minutes lit for half of the time and during the operation of the passing-beam;
- (c) If the applicant declares that the front fog lamp can be used with only the passing-beam or only the driving-beam(s)² lit or only the front fog lamp² lit at a time, the test shall be carried out in accordance with this condition, successively activating² the passing-beam one third of the time, the driving-beam(s) one third of the time and the front fog lamp for one third of the time specified in paragraph 1.1.

1.1.2. Test voltage

The voltage shall be applied to the terminals of the test sample as follows:

- (a) In case of replaceable filament light source(s) operated directly under vehicle voltage system conditions: The test shall be performed at 6.3 V, 13.2 V or 28.0 V as applicable except if the applicant specifies that the test sample may be used at a different voltage. In this case, the test shall be carried out with the filament light source operated at the highest voltage that can be used;
- (b) In case of replaceable gas discharge light source(s): the test voltage for the electronic light source control-gear is 13.2 ± 0.1 volts for 12 V vehicle voltage systems, or otherwise specified in the application for approval;
- (c) In the case of non-replaceable light source operated directly under vehicle voltage system conditions: all measurements on lighting units equipped with non-replaceable light sources (filament light sources and/ or others) shall be made at 6.3 V, 13.2 V or 28.0 V or at other voltages according to the vehicle voltage system as specified by the applicant respectively;
- (d) In the case of light sources, replaceable or non-replaceable, being operated independently from vehicle supply voltage and fully controlled by the system, or, in the case of light sources supplied by a supply and operating device, the test voltages as specified above shall be applied to the input terminals of that device. The test laboratory may require from the manufacturer the supply and

² Should two or more lamp filaments be simultaneously lit when headlamp flashing is used, this shall not be considered as being normal use of the filaments simultaneously.

³ When the tested headlamp includes signalling lamps, the latter shall be lit for the duration of the test. In the case of a direction indicator lamp, it shall be lit in flashing mode with an on/off time of approximately one to one.

operating device or a special power supply needed to supply the light source(s);

- (e) LED module(s) shall be measured at 6.75 V, 13.2 V or 28.0 V respectively, if not otherwise specified within this Regulation. LED module(s) operated by an electronic light source control gear, shall be measured as specified by the applicant;
- (f) Where signalling lamps are grouped, combined or reciprocally incorporated into the test sample and operating at voltages other than the nominal rated voltages of 6 V, 12 V or 24 V respectively, the voltage shall be adjusted as declared by the manufacturer for the correct photometric functioning of that lamp.
- (g) For a gas-discharge light source, the test voltage for the ballast or for the light source in case the ballast is integrated with the light source is 13.2 ± 0.1 volts for 12 V network system, or otherwise specified in the application for approval.

1.1.3. Test results

1.1.3.1. Visual inspection

Once the front fog lamp has been stabilised to the ambient temperature, the front fog lamp lens and the external lens, if any, shall be cleaned with a clean, damp cotton cloth. It shall then be inspected visually; no distortion, deformation, cracking or change in colour of either the front fog lamp lens or the external lens, if any, shall be noticeable.

1.1.3.2. Photometric test

To comply with the requirements of this Regulation, the following photometric values shall be verified in the following points:

In case of Class "B" front fog lamps: at point HV and the point of I_{\max} in zone D.

In case of Class "F3" front fog lamps: on line 5 at point $h = 0$ and the point of I_{\max} in zone D.

Another aiming may be carried out to allow for any deformation of the front fog lamp base due to heat (the change of the position of the cut-off line is covered in paragraph 2. Of this annex).

A 10 per cent discrepancy between the photometric characteristics and the values measured prior to the test is permissible including the tolerances of the photometric procedure.

1.2. Dirty front fog lamp

The front fog lamp, having been tested as specified in paragraph 1.1. above shall be operated for one hour as described in paragraph 1.1.1. Following preparation, as prescribed in paragraph 1.2.1. below, it shall be checked as prescribed in paragraph 1.1.3. above.

1.2.1. Preparation of the front fog lamp

1.2.1.1. Test mixture

1.2.1.1.1. For front fog lamps with the outside lens in glass:

The mixture of water and a polluting agent to be applied to the front fog lamp shall be composed of:

- (a) 9 parts by weight of silica sand with a particle size of 0-100 μm ,
- (b) 1 part by weight of vegetal carbon dust produced from beech wood with a particle size of 0-100 μm ,

- (c) 0.2 part by weight of NaCMC⁴,
- (d) 5 parts by weight of sodium chloride (pure at 99 per cent), and
- (e) An appropriate quantity of distilled water with a conductivity of ≤ 1 mS/m

The mixture must not be more than 14 days old.

1.2.1.1.2. For front fog lamp with the outside lens in plastic material:

The mixture of water and polluting agent to be applied to the front fog lamp shall be composed of:

- (a) 9 parts by weight of silica sand with a particle size of 0-100 μm ;
- (b) 1 part by weight of vegetal carbon dust produced from beech wood with a particle size of 0-100 μm ;
- (c) 0.2 part by weight of NaCMC⁴;
- (d) 5 parts by weight of sodium chloride (pure at 99 per cent);
- (e) 13 parts by weight of distilled water with a conductivity of ≤ 1 mS/m;
- (f) 2 ± 1 drops of surfactant⁵.

The mixture shall not be more than 14 days old.

1.2.1.2. Application of the test mixture to the front fog lamp

The test mixture shall be uniformly applied to the entire light emitting surface of the front fog lamp and then left to dry. This procedure shall be repeated until the illumination value has dropped to 15-20 per cent of the values measured for the following point under the conditions described in this annex:

Point of E_{max} in zone D.

2. Test for change in vertical position of the cut-off line under the influence of heat

This test consists of verifying that the vertical drift of the cut-off line under the influence of heat does not exceed the specified value for an operating front fog lamp.

The front fog lamp tested in accordance with paragraph 1. of this annex, shall be subjected to the test described in paragraph 2.1. below, without being removed from or readjusted in relation to its test fixture.

2.1. Test

The test shall be carried out in a dry and still atmosphere at an ambient temperature of $23 \text{ }^{\circ}\text{C} \pm 5 \text{ }^{\circ}\text{C}$.

Using a mass production light source, which has been aged for at least one hour, the front fog lamp shall be operated without being dismantled from or readjusted in relation to its test fixture. (For the purpose of this test, the voltage shall be adjusted as specified in paragraph 1.1.2. above). The position of the cut-off line between a point situated 3.0 degrees left and a point situated 3.0 degrees right of the line VV (see Annex 4 to the Regulation) shall be verified after three minutes (r3) and 60 minutes (r60) respectively of operation.

The measurement of the variation in the cut-off line position as described above shall be carried out by any method giving acceptable accuracy and reproducible results.

2.2. Test results

- 2.2.1. The result expressed in milliradians (mrad) shall be considered acceptable when the absolute value $\Delta r_1 = |r_3 - r_{60}|$ recorded on this front fog lamp is not more than 2 mrad ($\Delta r_1 \leq 2$ mrad).
- 2.2.2. However, if this value is more than 2 mrad but not more than 3 mrad ($2 \text{ mrad} < \Delta r \leq 3 \text{ mrad}$) a further sample of a front fog lamp mounted on a test fixture representative of the correct installation on the vehicle shall be tested as described in paragraph 2.1. above after being subjected three consecutive times to the cycle as described below, in order to stabilise the position of the mechanical parts of the front fog lamp:
- (a) Operation of the front fog lamp for one hour (the voltage shall be adjusted as specified in paragraph 1.1.2. of this annex);
 - (b) One hour period with the lamp switched off.
- 2.2.3. After these three cycles, the front fog lamp type shall be considered as acceptable if the absolute values Δr measured according to paragraph 2.1. above on this further sample meet the requirements in paragraph 2.2.1. above.

Annex 6

Requirements for lamps incorporating lenses of plastic material - Testing of lens or material samples and of complete lamps

1. General specifications
 - 1.1. The samples supplied pursuant to paragraph 2.2.2. of this Regulation shall satisfy the specifications indicated in paragraphs 2.1.to 2.5. below.
 - 1.2. The two samples of complete lamps supplied pursuant to paragraph 2.3. of this Regulation (or paragraph 2.4. of this Regulation as applicable) and incorporating lenses of plastic material shall, with regard to the lens material, satisfy the specifications indicated in paragraph 2.6. below.
 - 1.3. The samples of lenses of plastic material or samples of material shall be subjected, with the reflector to which they are intended to be fitted (where applicable), to approval tests in the chronological order indicated in Table A reproduced in Appendix 1 to this annex.

However, if the lamp manufacturer can prove that the product has already passed the tests prescribed in paragraphs 2.1. to 2.5. below, or the equivalent tests pursuant to another Regulation, those tests need not be repeated; only the tests prescribed in Appendix 1, Table B, shall be mandatory.

2. Tests
 - 2.1. Resistance to temperature changes
 - 2.1.1. Tests

Three new samples (lenses) shall be subjected to five cycles of temperature and humidity (RH = relative humidity) change in accordance with the following programme:

3 hours at $40\text{ °C} \pm 2\text{ °C}$ and 85 - 95 per cent RH;

1 hour at $23\text{ °C} \pm 5\text{ °C}$ and 60 - 75 per cent RH;

15 hours at $-30\text{ °C} \pm 2\text{ °C}$;

1 hour at $23\text{ °C} \pm 5\text{ °C}$ and 60 - 75 per cent RH;

3 hours at $80\text{ °C} \pm 2\text{ °C}$;

1 hour at $23\text{ °C} \pm 5\text{ °C}$ and 60 - 75 per cent RH;

Before this test, the samples shall be kept at $23\text{ °C} \pm 5\text{ °C}$ and 60 - 75 per cent RH for at least four hours.

Note: The periods of one hour at $23\text{ °C} \pm 5\text{ °C}$ shall include the periods of transition from one temperature to another which are needed in order to avoid thermal shock effects.

2.1.2. Photometric measurements

2.1.2.1. Method

Photometric measurements shall be carried out on the samples before and after the test. These measurements shall be made under the conditions as specified in paragraph 6.3. or 6.4. of this Regulation, at the following points:

In the case of Class "B" front fog lamps:

- (a) At point HV and
- (b) Point $h = 0, v = 2^\circ D$ in zone D.

In the case of Class "F3" front fog lamps:

- (a) Intersection VV line with line 6 and
- (b) Intersection VV line with line 4.

2.1.2.2. Results

The variation between the photometric values measured on each sample before and after the test shall not exceed 10 per cent including the tolerances of the photometric procedure.

2.2. Resistance to atmospheric and chemical agents

2.2.1. Resistance to atmospheric agents

Three new samples (lenses or samples of material) shall be exposed to radiation from a source having a spectral energy distribution similar to that of a black body at a temperature between 5,500 K and 6,000 K. Appropriate filters shall be placed between the source and the samples so as to reduce as far as possible radiations with wavelengths smaller than 295 nm and greater than 2,500 nm. The samples shall be exposed to an energetic illumination of $1,200 \text{ W/m}^2 \pm 200 \text{ W/m}^2$ for a period such that the luminous energy that they receive is equal to $4,500 \text{ MJ/m}^2 \pm 200 \text{ MJ/m}^2$. Within the enclosure, the temperature measured on the black panel placed on a level with the samples shall be $50^\circ\text{C} \pm 5^\circ\text{C}$. In order to ensure a regular exposure, the samples shall revolve around the source of radiation at a speed between 1 and 5 1/min.

The samples shall be sprayed with distilled water of conductivity lower than $1 \mu\text{S/m}$ at a temperature of $23^\circ\text{C} \pm 5^\circ\text{C}$, in accordance with the following cycle:

Spraying: 5 minutes;

Drying: 25 minutes.

2.2.2. Resistance to chemical agents

After the test described in paragraph 2.2.1. above and the measurement described in paragraph 2.2.3.1. below have been carried out, the outer face of the said three samples shall be treated as described in paragraph 2.2.2.2. with the mixture defined in paragraph 2.2.2.1. below.

2.2.2.1. Test mixture

The test mixture shall be composed of 61.5 per cent n-heptane, 12.5 per cent toluene, 7.5 per cent ethyl tetrachloride, 12.5 per cent trichlorethylene and 6 per cent xylene (volume per cent).

- 2.2.2.2. Application of the test mixture
- Soak a piece of cotton cloth (as per ISO 105) until saturation with the mixture defined in paragraph 2.2.2.1. above and, within 10 seconds, apply it for 10 minutes to the outer face of the sample at a pressure of 50 N/cm², corresponding to a force of 100 N applied on a test surface of 14 x 14 mm.
- During this 10-minute period, the cloth pad shall be soaked again with the mixture so that the composition of the liquid applied is continuously identical with that of the test mixture prescribed.
- During the period of application, it is permissible to compensate the pressure applied to the sample in order to prevent it from causing cracks.
- 2.2.2.3. Cleaning
- At the end of the application of the test mixture, the samples shall be dried in the open air and then washed with the solution described in paragraph 2.3. below (resistance to detergents) at 23 °C ± 5 °C.
- Afterwards the samples shall be carefully rinsed with distilled water containing not more than 0.2 per cent impurities at 23 °C ± 5 °C and then wiped off with a soft cloth.
- 2.2.3. Results
- 2.2.3.1. After the test of resistance to atmospheric agents, the outer face of the samples shall be free from cracks, scratches, chipping and deformation, and the mean variation in transmission
- $$\Delta t = (T_2 - T_3) / T_2,$$
- measured on the three samples according to the procedure described in Appendix 2 to this annex shall not exceed 0.020 ($\Delta t_m \leq 0.020$).
- 2.2.3.2. After the test of resistance to chemical agents, the samples shall not bear any traces of chemical staining likely to cause a variation of flux diffusion, whose mean variation
- $$\Delta d = (T_5 - T_4) / T_2,$$
- measured on the three samples according to the procedure described in Appendix 2 to this annex shall not exceed 0.020 ($\Delta d_m \leq 0.020$).
- 2.3. Resistance to detergents and hydrocarbons
- 2.3.1. Resistance to detergents
- The outer face of three samples (lenses or samples of material) shall be heated to 50 °C ± 5 °C and then immersed for five minutes in a mixture maintained at 23 °C ± 5 °C and composed of 99 parts distilled water containing not more than 0.02 per cent impurities and one part alkylaryl sulphonate.
- At the end of the test, the samples shall be dried at 50 °C ± 5 °C. The surface of the samples shall be cleaned with a moist cloth.
- 2.3.2. Resistance to hydrocarbons
- The outer face of these three samples shall then be lightly rubbed for one minute with a cotton cloth soaked in a mixture composed of 70 per cent n-heptane and 30 per cent toluene (volume per cent), and shall then be dried in the open air.
- 2.3.3. Results
- After the above two tests have been performed successively, the mean value of the variation in transmission:
- $$\Delta t = (T_2 - T_3) / T_2,$$

measured on the three samples according to the procedure described in Appendix 2 to this annex shall not exceed 0.010 ($\Delta t_m \leq 010$).

2.4. Resistance to mechanical deterioration

2.4.1. Mechanical deterioration method

The outer face of the three new samples (lenses) shall be subjected to the uniform mechanical deterioration test by the method described in Appendix 3 to this annex.

2.4.2. Results

After this test, the variations:

in transmission: $\Delta t = (T2 - T3) / T_2$

and in diffusion: $\Delta d = (T5 - T4) / T_2$

shall be measured according to the procedure described in Appendix 2 in the area specified in paragraph 2.2.4.1.1. The mean value of the three samples shall be such that:

$\Delta t_m \leq 0.010$;

$\Delta d_m \leq 0.050$.

2.5. Test of adherence of coatings, if any

2.5.1. Preparation of the sample

A surface of 20 mm x 20 mm in area of the coating of a lens shall be grated with a razor blade or a needle into a grid of squares approximately 2 mm x 2 mm. The pressure on the blade or needle shall be sufficient to cut at least the coating.

2.5.2. Description of the test

Use an adhesive tape with a force of adhesion of 2 N/(cm of width) \pm 20 per cent measured under the standardized conditions specified in Appendix 4 to this annex. This adhesive tape, which shall be at least 25 mm wide, shall be pressed for at least five minutes to the surface prepared as prescribed in paragraph 2.5.1. above.

Then the end of the adhesive tape shall be loaded in such a way that a force perpendicular to that surface balances the force of adhesion to the surface considered. At this stage, the tape shall be torn off at a constant speed of 1.5 m/s \pm 0.2 m/s.

2.5.3. Results

There shall be no appreciable impairment of the grated area. Impairments at the intersections between squares or at the edges of the cuts shall be permitted, provided that the impaired area does not exceed 15 per cent of the grated surface.

- 2.6. Tests of the complete lamp incorporating a lens of plastic material
 - 2.6.1. Resistance to mechanical deterioration of the lens surface
 - 2.6.1.1. Tests

The lens of lamp sample No. 1 shall be subjected to the test described in paragraph 2.4.1.
 - 2.6.1.2. Results

After the test, the results of photometric measurements prescribed in zone B for Class B front fog lamp and lines 2 and 5 for Class F3 front fog lamp shall not exceed the maximum values prescribed by more than 30 per cent.
 - 2.6.2. Test of adherence of coatings, if any

The lens of lamp sample No. 2 shall be subjected to the test described in paragraph 2.5. above.
- 2.7. Resistance to light source radiation
 - 2.7.1. In the case of gas-discharge light sources: for testing the resistance of light transmitting components made of plastic materials against UV radiation inside the front fog lamp:
 - 2.7.1.1. Flat samples of each light transmitting plastic component of the front fog lamps are exposed to the light of the gas-discharge light source. The parameters such as angles and distances of these samples shall be the same as in the front fog lamp.
 - 2.7.1.2. After 1,500 hours of continuous exposure, the colorimetric specifications of the transmitted light must be met with a new standard gas-discharge light source, and the surface of the samples shall be free of cracks, scratches, scaling or deformation.
- 3. Verification of the conformity of production
 - 3.1. With regard to the materials used for the manufacture of lenses, the lamps of a series shall be recognized as complying with this Regulation if:
 - 3.1.1. After the test for resistance to chemical agents and the test for resistance to detergents and hydrocarbons, the outer face of the samples exhibits no cracks, chipping or deformation visible to the naked eye (see paragraphs 2.2.2., 2.3.1. and 2.3.2. above);
 - 3.1.2. After the test described in paragraph 2.6.1.1. above, the photometric values at the points of measurement considered in paragraph 2.6.1.2. above are within the limits prescribed for conformity of production by this Regulation.
 - 3.2. If the test results fail to satisfy the requirements, the tests shall be repeated on another sample of front fog lamps selected at random.

Annex 6 - Appendix 1

Chronological order of approval tests

A. Tests on plastic materials (lenses or samples of material supplied pursuant to paragraph 2.2.2. of this Regulation).

Tests	Samples	Lenses or samples of material						Lenses						
		1	2	3	4	5	6	7	8	9	10	11	12	13
1.1.	Limited photometry (para. 2.1.2.)										X	X	X	
1.1.1.	Temperature change (para. 2.1.1.)										X	X	X	
1.1.2.	Limited photometry (para. 2.1.2.)										X	X	X	
1.2.1.	Transmission measurement	X	X	X	X	X	X	X	X	X				
1.2.2.	Diffusion measurement	X	X	X				X	X	X				
1.3.	Atmospheric agents (para. 2.2.1.)	X	X	X										
1.3.1.	Transmission measurement	X	X	X										
1.4.	Chemical agents (para. 2.2.2.)	X	X	X										
1.4.1.	Diffusion measurement	X	X	X										
1.5.	Detergents (para. 2.3.1.)				X	X	X							
1.6.	Hydrocarbons (para. 2.3.2.)				X	X	X							
1.6.1.	Transmission measurement				X	X	X							
1.7.	Deterioration (para. 2.4.1.)							X	X	X				
1.7.1.	Transmission measurement							X	X	X				
1.7.2.	Diffusion measurement							X	X	X				
1.8.	Adherence (para. 2.5.)													X

B. Tests on complete front fog lamps (supplied pursuant to paragraph 2.3.2. of this Regulation).

<i>Tests</i>	<i>Complete headlamp</i>	
	<i>Sample No.</i>	
	<i>1</i>	<i>2</i>
2.1 Deterioration (para. 2.6.1.1.)	X	
2.2 Photometry (para. 2.6.1.2.)	X	
2.3 Adherence (para. 2.6.2.)		X

Annex 6 - Appendix 2

Method of measurement of the diffusion and transmission of light

1. Equipment (see figure)

The beam of a collimator K with a half divergence $\beta / 2 = 17.4 \times 10^{-4}$ rd is limited by a diaphragm D_T with an opening of 6 mm against which the sample stand is placed.

A convergent achromatic lens L_2 , corrected for spherical aberrations, links the diaphragm D_T with the receiver R; the diameter of the lens L_2 shall be such that it does not diaphragm the light diffused by the sample in a cone with a half top angle of $\beta / 2 = 14^\circ$.

An annular diaphragm D_D with angles $a / 2 = 1^\circ$ and $a_{\max} / 2 = 12^\circ$ is placed in an image focal plane of the lens L_2 .

The non-transparent central part of the diaphragm is necessary in order to eliminate the light arriving directly from the light source. It shall be possible to remove the central part of the diaphragm from the light beam in such a manner that it returns exactly to its original position.

The distance $L_2 D_T$ and the focal length F_2^1 of the lens L_2 shall be so chosen that the image of D_T completely covers the receiver R.


When the initial incident flux is referred to 1,000 units, the absolute precision of each reading shall be better than 1 unit.

2. Measurements

The following readings shall be taken:

<i>Reading</i>	<i>With sample</i>	<i>With central part of D_D</i>	<i>Quantity represented</i>
T ₁	no	no	Incident flux in initial reading
T ₂	yes (before test)	no	Flux transmitted by the new material in a field of 24 degrees
T ₃	yes (after test)	no	Flux transmitted by the tested material in a field of 24 degrees
T ₄	yes (before test)	yes	Flux diffused by the new material
T ₅	yes (after test)	yes	Flux diffused by the tested material

¹ For L_2 the use a focal distance of about 80 mm is recommended.

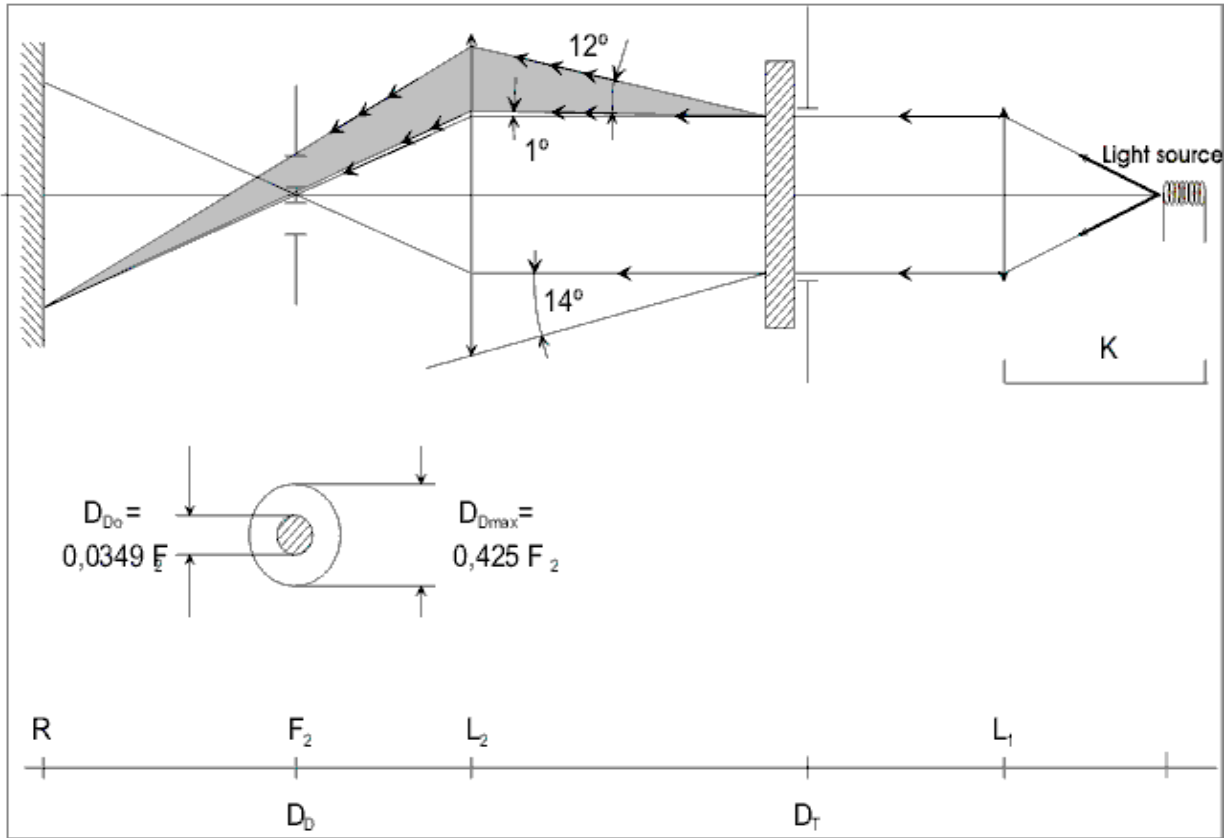

Annex 6 - Appendix 3

Spray testing method

1. Test equipment

Spray gun

The spray gun used shall be equipped with a nozzle 1.3 mm in diameter allowing a liquid flow rate of 0.24 ± 0.02 l/minute at an operating pressure of 6.0 bars - 0, + 0.5 bar.

Under these operation conditions the fan pattern obtained shall be $170 \text{ mm} \pm 50 \text{ mm}$ in diameter on the surface exposed to deterioration, at a distance of $380 \text{ mm} \pm 10 \text{ mm}$ from the nozzle.

Test mixture

The test mixture shall be composed of:

Silica sand of hardness 7 on the Mohs scale, with a grain size between 0 and 0.2 mm and an almost normal distribution, with an angular factor of 1.8 to 2;

Water of hardness not exceeding 205 g/m^3 for a mixture comprising 25 g of sand per litre of water.

2. Test

The outer surface of the lamp lenses shall be subjected once or more than once to the action of the sand jet produced as described above. The jet shall be sprayed almost perpendicular to the surface to be tested.

The deterioration shall be checked by means of one or more samples of glass placed as a reference near the lenses to be tested. The mixture shall be sprayed until the variation in the diffusion of light on the sample or samples measured by the method described in Appendix 2, is such that:

$$\Delta d = (T5 - T4) / T_2 \leq 0.0250 \pm 0.0025$$

Several reference samples may be used to check that the whole surface to be tested has deteriorated homogeneously.

Annex 6 - Appendix 4

Adhesive tape adherence test

1. Purpose
This method allows the determination under standard conditions of the linear force of adhesion of an adhesive tape to a glass plate.
2. Principle
To measure the force necessary to un-stick an adhesive tape from a glass plate at an angle of 90°.
3. Specified atmospheric conditions
The ambient conditions shall be at $23\text{ °C} \pm 5\text{ °C}$ and 65 ± 15 per cent relative humidity (RH).
4. Test pieces
Before the test, the sample roll of adhesive tape shall be conditioned for 24 hours in the specified atmosphere (see paragraph 3. above).
Five test pieces each 400 mm long shall be tested from each roll. These test pieces shall be taken from the roll after the first three turns were discarded.
5. Procedure
The test shall be carried out under the ambient conditions specified in paragraph 3. above.
Take the five test pieces while unrolling the tape radially at a speed of approximately 300 mm/s and then apply them within 15 seconds in the following manner:
Apply the tape to the glass plate progressively with a slight longitudinal rubbing movement of the finger, without excessive pressure to the tape and to the glass plate.
Leave the assembly in the specified atmospheric conditions for 10 minutes.
Unstick about 25 mm of the test piece from the plate in a plane perpendicular to the axis of the test piece.
Fix the plate and fold back the free end of the tape at 90°. Apply force in such a manner that the separation line between the tape and the plate is perpendicular to this force and perpendicular to the plate.
Pull to un-stick the tape at a speed of $300\text{ mm/s} \pm 30\text{ mm/s}$ and record the force required.
6. Results
The five values obtained shall be arranged in order and the median value taken as the result of the measurement. This value shall be expressed in Newton per centimetre of width of the tape.

Annex 7

Minimum requirements for conformity of production control procedure

1. General
 - 1.1. The conformity requirements shall be considered to be satisfied from a mechanical and geometric standpoint, if the differences do not exceed inevitable manufacturing deviations within the requirements of this Regulation.
 - 1.2. With respect to photometric performances, the conformity of mass-produced front fog lamps shall not be contested if the photometric performances according to the requirements in Annex 2 to this Regulation depending on the prevailing class of front fog lamps are satisfied.
 - 1.2.1. If the results of the tests described above do not meet the requirements, tests on the front fog lamp shall be repeated using light sources as specified in paragraphs 6.3. or 6.4. of this Regulation, as appropriate.
 - 1.2.2. If the results of the tests described above do not meet the requirements, the alignment of the front fog lamp may be changed, provided that the axis of the beam is not displaced laterally by more than 0.5° to the right or left and not by more than 0.2° up or down. In the re-aimed position all photometric requirements shall be met.
 - 1.3. With respect to the verification of the change in vertical position of the cut-off line under the influence of heat, the following procedure shall be applied:
 - 1.3.1. One of the sampled front fog lamps shall be tested according to the procedure described in paragraph 2.1. of Annex 5 after being subjected three consecutive times to the cycle described in paragraph 2.2.2. of Annex 5.
 - 1.3.2. The front fog lamp shall be considered as acceptable if Δr does not exceed 3.0 mrad. If this value exceeds 3.0 mrad but is not more than 4.0 mrad, a second front fog lamp shall be subjected to the test after which the mean of the absolute values recorded on both samples shall not exceed 3.0 mrad.
 - 1.4. The chromaticity coordinates shall comply with paragraph 7. of this Regulation. The photometric performance of a front fog lamp emitting an enlarged selective yellow light when equipped with a colourless light source shall be the values contained in this Regulation multiplied by 0.84.
2. Minimum requirements for verification of conformity by the manufacturer

For each type of front fog lamp the holder of the approval mark shall carry out at least the following tests, at appropriate intervals. The tests shall be carried out in accordance with the provisions of this Regulation. If any sampling shows non-conformity with regard to the type of test concerned, further samples shall be taken and tested. The manufacturer shall take steps to ensure the conformity of the production concerned.
- 2.1. Nature of tests

Tests of conformity in this Regulation shall cover the photometric characteristics and the verification of the change in vertical position of the cut-off line under the influence of heat.

- 2.2. Methods used in tests
- 2.2.1. Tests shall generally be carried out in accordance with the methods set out in this Regulation.
- 2.2.2. In any test of conformity carried out by the manufacturer, equivalent methods may be used with the consent of the competent authority responsible for approval tests. The manufacturer is responsible for proving that the applied methods are equivalent to those laid down in this Regulation.
- 2.2.3. The application of paragraphs 2.2.1. and 2.2.2. above requires regular calibration of test apparatus and its correlation with measurements made by a competent authority.
- 2.2.4. In all cases the reference methods shall be those of this Regulation, particularly for the purpose of administrative verification and sampling.
- 2.3. Nature of sampling
- Samples of front fog lamps shall be selected at random from the production of a uniform batch. A uniform batch means a set of front fog lamps of the same type, defined according to the production methods of the manufacturer.
- The assessment shall in general cover series production from individual factories. However, a manufacturer may group together records concerning the same type from several factories, provided these operate under the same quality system and quality management.
- 2.4. Measured and recorded photometric characteristics
- The sampled front fog lamp shall be subjected to photometric measurements at the points provided for in the Regulation, the reading being limited to points listed in Annex 2 to this Regulation depending on the prevailing class of front fog lamps.
- 2.5. Criteria governing acceptability
- The manufacturer is responsible for carrying out a statistical study of the test results and for defining, in agreement with the competent authority, criteria governing the acceptability of his products in order to meet the specifications laid down for verification of conformity of products in paragraph 11.1. of this Regulation.
- The criteria governing the acceptability shall be such that, with a confidence level of 95 per cent, the minimum probability of passing a spot check in accordance with Annex 8 (first sampling) would be 0.95.

Annex 8

Minimum requirements for sampling by an inspector

1. General

The conformity requirements shall be considered to be satisfied from a mechanical and geometric standpoint, if the differences do not exceed inevitable manufacturing deviations within the requirements of this Regulation.

1.2. With respect to photometric performances, the conformity of mass-produced front fog lamps shall not be contested if the photometric performances according to the requirements in Annex 2 to this Regulation depending on the prevailing class of front fog lamps are satisfied.

If the results of the tests described above do not meet the requirements, tests on the front fog lamp shall be repeated using light sources as specified in paragraphs 6.3. or 6.4. of this Regulation, as appropriate.

If the results of the tests described above do not meet the requirements, the alignment of the front fog lamp may be changed, provided that the axis of the beam is not displaced laterally by more than 0.5° to the right or left and not by more than 0.2° up or down. In the re-aimed position all photometric requirements shall be met.

If the specified luminous intensity requirements are not met, a re-aim of the cut-off position within $\pm 0.5^\circ$ vertical and/or $\pm 2^\circ$ horizontal is allowed. In the re-aimed position all photometric requirements shall be met.

If vertical adjustment cannot be performed repeatedly to the required position within the allowed tolerances, the instrumental method as specified in Annex 9 to this Regulation shall be applied and the quality of cut-off be tested on one sample.

1.2.1. Front fog lamps with obvious defects are disregarded.

1.3. The chromaticity coordinates shall comply with paragraph 7. of this Regulation. The photometric performance of a front fog lamp emitting an enlarged selective yellow light when equipped with a colourless light source shall be the values contained in this Regulation multiplied by 0.84.

2. First sampling

In the first sampling four front fog lamps are selected at random. The first sample of two is marked A, the second sample of two is marked B.

2.1. The conformity of mass-produced front fog lamps shall not be contested if the deviation of any specimen of samples A and B (all four lamps) is not more than 20 per cent.

In the case, that the deviation of both lamps of sample A is not more than 0 per cent, the measurement can be closed.

2.2. The conformity of mass-produced front fog lamps shall be contested if the deviation of at least one specimen of samples A or B is more than 20 per cent.

The manufacturer shall be requested to bring his production in line with the requirements (alignment) and a repeated sampling according to paragraph 3. below shall be carried out within two months' time after the notification. The samples A and B shall be retained by the Technical Service until the entire CoP process is finished.

3. First repeated sampling

A sample of four lamps is selected at random from stock manufactured after alignment.

The first sample of two is marked C, the second sample of two is marked D.
- 3.1. The conformity of mass-produced front fog lamps shall not be contested if the deviation of any specimen of samples C and D (all four lamps) is not more than 20 per cent.

In the case, that the deviation of both lamps of sample C is not more than 0 per cent, the measurement can be closed.
- 3.2. The conformity of mass-produced front fog lamps shall be contested if the deviation of at least.
- 3.2.1. One specimen of samples C or D is more than 20 per cent but the deviation of all specimen of these samples is not more than 30 per cent.

The manufacturer shall be requested again to bring his production in line with the requirements (alignment).

A second repeated sampling according to paragraph 4. below shall be carried out within two months' time after the notification. The samples C and D shall be retained by the Technical Service until the entire COP process is finished.
- 3.2.2. One specimen of samples C and D is more than 30 per cent.

In this case the approval shall be withdrawn and paragraph 5 below shall be applied.
4. Second repeated sampling

A sample of four lamps is selected at random from stock manufactured after alignment.

The first sample of two is marked E, the second sample of two is marked F.
- 4.1. The conformity of mass-produced front fog lamps shall not be contested if the deviation of any specimen of samples E and F (all four lamps) is not more than 20 per cent.

In the case, that the deviation of both lamps of sample E is not more than 0 per cent, the measurement can be closed.
- 4.2. The conformity of mass-produced front fog lamps shall be contested if the deviation of at least one specimen of samples E or F is more than 20 per cent.

In this case the approval shall be withdrawn and paragraph 5 below shall be applied.
5. Approval withdrawn

Approval shall be withdrawn according to paragraph 11. of this Regulation.
6. Change of the vertical position of the cut-off line

With respect to the verification of the change in vertical positions of the cut-off line under the influence of heat, the following procedure shall be applied:

One of the front fog lamps of sample A after sampling procedure in paragraph 2. of this Annex shall be tested according to the procedure described in paragraph 2.1. of Annex 4 after being subjected three consecutive times to the cycle described in paragraph 2.2.2. of Annex 4.

The front fog lamp shall be considered as acceptable if Δr does not exceed 3.0 mrad.

If this value exceeds 3.0 mrad but is not more than 4.0 mrad, the second front fog lamp of sample A shall be subjected to the test after which the mean of the absolute values recorded in both samples shall not exceed 3.0 mrad.

However, if this value of 3.0 mrad on sample A is not complied with, the two front fog lamps of sample B shall be subjected to the same procedure and the value of Δr for each of them shall not exceed 3.0 mrad.

Annex 9


Definition and sharpness of the cut-off line and aiming procedure by means of this cut-off line for Class F3 front fog lamps

1. General

The luminous intensity distribution of the front fog lamp shall incorporate a cut-off line that enables the front fog lamp to be adjusted correctly for the photometric measurements and for the aiming on the vehicle. The characteristics of the cut-off line shall comply with the requirements set out in paragraphs 2. to 4. below.

2. Shape of the cut-off line

For visual adjustment of the front fog beam the cut-off line shall provide a horizontal line for vertical adjustment of the front fog lamp extending to 4° either side of the v-v line (see Figure 1).

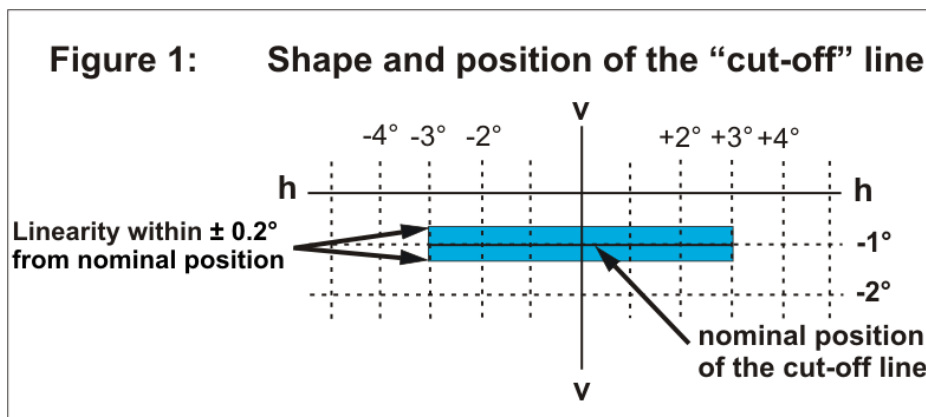

3. Adjustment of the front fog lamp

3.1. Horizontal adjustment

The cut-off line shall be so positioned that the projected beam pattern appears approximately symmetrical to the v-v line. When the front fog lamp is designed for use in pairs or has otherwise an asymmetric beam pattern, it shall be horizontally aligned according to the specification of the applicant, or otherwise in such a way that the cut-off line appears symmetrical to the v-v line.

3.2. Vertical adjustment

After horizontal adjustment of the front fog beam according to paragraph 3.1. above, the vertical adjustment shall be performed in such a way that the cut-off line is moved upwards from the lower position until it is situated on the v-v line at 1° below the h-h line. If the horizontal part is not straight but slightly curved or inclined, the cut-off line shall not exceed the vertical range formed by two horizontal lines which are situated between 3° left and right of the v-v line at 0.2° above and below the nominal position of the cut-off (see Figure 1).

3.2.1. When the vertical positions of three attempts to adjust the cut-off differ by more than 0.2°, the horizontal part of the cut-off line is assumed not to provide sufficient linearity or sharpness for performing visual adjustment. In this case the quality of cut-off shall be tested instrumentally for compliance with requirements as follows.

4. Measurement of the quality of cut-off
- 4.1. Measurements shall be performed by vertically scanning through the horizontal part of the cut-off line in angular steps not exceeding 0.05°
- At either a measurement distance of 10 m and a detector with a diameter of approximately 10 mm.
- Or at a measurement distance of 25 m and a detector with a diameter of approximately 30 mm.
- The measurement of the cut-off quality shall be considered acceptable if the requirements of the paragraphs 4.1.1. to 4.1.3. of this annex shall comply with at least one measurement at 10 m or 25 m.
- The measuring distance at which the test was determined shall be recorded in paragraph 9. of the communication form in Annex 2 of this Regulation.
- The scanning is performed from downwards upwards through the cut-off line along the vertical lines at -2.5° and $+2.5^\circ$ from the v-v line. When so measured, the quality of the cut-off line shall meet the following requirements:
- 4.1.1. Not more than one cut-off line shall be visible.
- 4.1.2. Sharpness of cut-off:
- If scanned vertically through the horizontal part of the cut-off line along vertical lines at $\pm 1^\circ$ from the v-v line, the maximum value measured for the sharpness factor G of the cut-off line shall not be less than 0.08 where:
- $$G = (\log E_v - \log E_{(v+0.1^\circ)})$$
- 4.1.3. Linearity
- The part of the cut-off line which serves vertical adjustment shall be horizontal from 3° left to 3° right of the v-v line. This requirement is satisfied, if the vertical positions of the inflection points according to paragraph 3.2. above at 3° left and right of the v-v line do not deviate by more than $\pm 0.20^\circ$.
5. Instrumental vertical adjustment
- If the cut-off line complies with the above quality requirements, the vertical beam adjustment can be performed instrumentally. For this purpose the inflection point where $d^2(\log E) / dv^2 = 0$ is positioned on the v-v line and below the h-h line. The movement for measuring and adjusting the cut-off line shall be upwards from below the nominal position.

Annex 10


Overview of operational periods concerning test for the stability of photometric performance

Abbreviations: P: passing-beam lamp
 D: driving-beam lamp (D₁ + D₂ means two driving-beams)
 F: front fog lamp


All following grouped headlamps and front fog lamps together with the added marking symbols are given as examples and are not exhaustive.

■ ■ ■ ■ : means a cycle of 15 minutes off and 5 minutes lit.


1. P or D or F (HC or HR or B or F3)

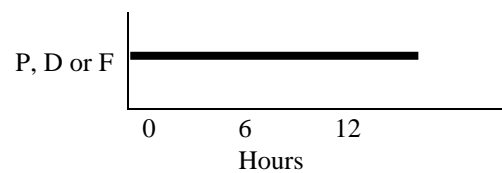


2. P+F (HC B or F3)

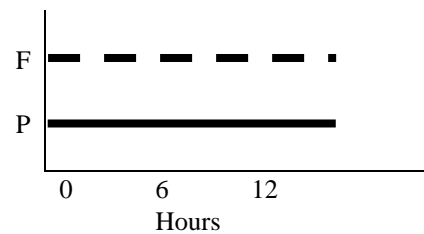


3. P+F (HC B or F3/) or HC/B or F3

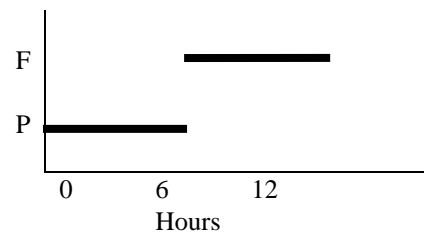


4. D+F (HR B or F3) or D₁+D₂+F (HR B or F3)

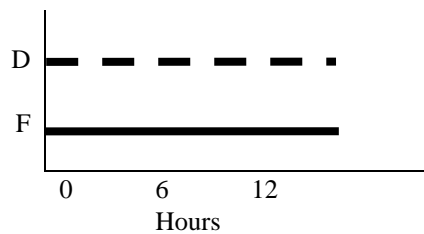


5. D+F (HR B or F3/) or D₁+D₂+F (HR B or F3/)

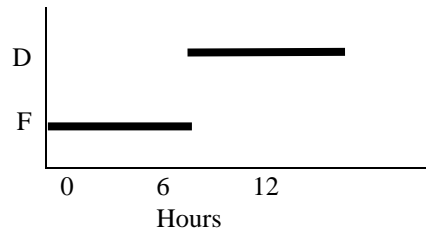


6. P+D+F (HCR B or F3) or P+D₁+D₂+F (HCR HR B or F3)

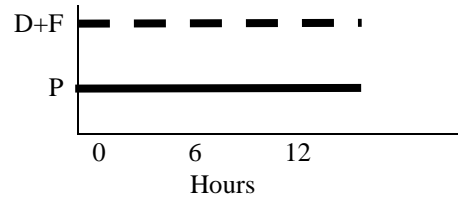


7. P+D+F (HC/R B or F3) or P+D₁+D₂+F (HC/R HR B or F3)

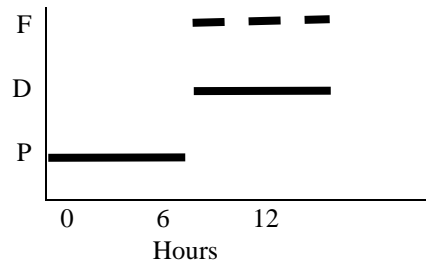

8. P+D+F (HCR B or F3/) or P+D₁+D₂+F (HCR HR B or F3/)

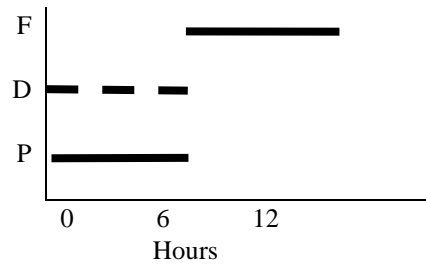


9. P+D+F (HC/R B or F3/) or P+D₁+D₂+F (HC/R HR B or F3/)

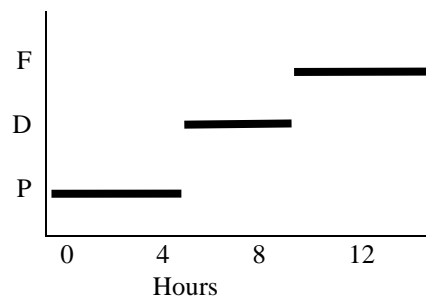

Annex 11

Centre of reference

Diameter = $a = 2 \text{ mm min.}$

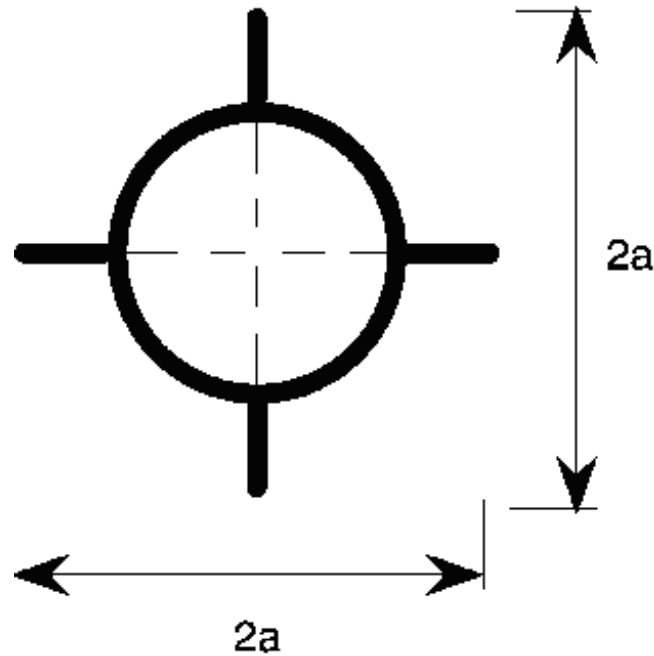

This optional mark of the centre of reference shall be positioned on the lens at its intersection with the reference axis of the front fog lamp.

The above drawing represents the mark of the centre of reference as projected on a plane substantially tangential to the lens about the centre of the circle. The lines constituting this mark may either be solid or dotted.

Annex 12

Requirements in case of use of LED module(s)

1. General specifications
 - 1.1. Each LED module sample submitted shall conform to the relevant specifications of this Regulation when tested with the electronic light source control-gear(s) supplied, if any.
 - 1.2. LED modules shall be so designed as to be, and to remain in good working order when in normal use. They shall moreover exhibit no fault in design or manufacture.
 - 1.3. LED modules shall be tamperproof.
 - 1.4. The design of removable LED modules shall be such that:
 - 1.4.1. After removal and replacement of the module the photometric requirements of the headlamp shall still be met;
 - 1.4.2. Non-identical LED modules within the same lamp housing cannot be interchanged.
 - 1.5. In the case of LED modules:
 - 1.5.1. The geometric position and dimensions of the elements for optical radiation and shielding, if any, shall be as indicated on the submitted data sheet.
 - 1.5.2. The measurement shall be made using optical methods through the transparent envelope, after ageing with the light source supplied by the electronic light source control-gear at test voltage.
 - 1.5.3. The position and dimension and transmission of the stripes or shields, if any, shall be as indicated on the submitted data sheet.
2. Manufacture
 - 2.1. The transparent envelope (e.g. bulb) of the light source shall exhibit no marks or spots, which might impair their efficiency and their optical performance.
 - 2.2. In case of LED modules:
 - 2.2.1. The LED(s) on the LED module shall be equipped with suitable fixation elements.
 - 2.2.2. The fixation elements shall be strong and firmly secured to the light source(s) and the LED module.
3. Test conditions
 - 3.1. Application and relaxation
 - 3.1.1. All samples shall be tested as specified in paragraph 4. below;
 - 3.1.2. The type of light sources shall be as defined in UN Regulation No. 48 paragraph 2.7.1., in particular with regard to the element of visible radiation. Other types of light sources are not permitted.
 - 3.1.3. LED module operating conditions
 - 3.1.3.1. All samples shall be tested under the conditions as specified in paragraph 6.4.1.4. of this Regulation.
 - 3.1.3.2. If not specified differently in this annex, LED modules shall be tested inside the front fog lamp as submitted by the manufacturer.
 - 3.1.4. Ambient temperature

For the measurement of electrical and photometric characteristics, the front fog lamp shall be operated in dry and still atmosphere at an ambient temperature of $23\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$.

- 3.2. Ageing
 - 3.2.1. LED modules shall be aged.
 - 3.2.2. The tests below shall be carried out after ageing with the LED module(s) supplied by the submitted electronic light source control-gear at test voltage.
 - 3.2.3. LED module(s)

Upon the request of the applicant the LED module shall be operated for 15 h and cooled down to ambient temperature before starting the tests as specified in this Regulation.
 - 3.2.4. Filament lamps

Filament lamps shall first be aged at their test voltage for approximately one hour. For dual-filament lamps, each filament shall be aged separately.
 - 3.2.5. Gas discharge light sources

With the exception of the starting test, all tests shall be carried out with light sources which have been aged for a minimum of 15 cycles having the following switching cycle: 45 minutes on, 15 seconds off, 5 minutes on, 10 minutes off.
4. Specific tests

Filament lamps approved according to UN Regulation No. 37, gas-discharge light sources approved according to UN Regulation No. 99 and LED modules are exempted from the tests indicated in paragraphs 4.3.1. and 4.3.2. below.

 - 4.1. [Reserved]
 - 4.2. Gas discharge light sources

The starting test shall be applied to light sources which have not been aged and have not been used for a period of at least 24 hours prior to the test. The light source shall start directly and remain alight.
 - 4.3. Run-up
 - 4.3.1. Filament lamps are exempted from this test.
 - 4.3.2. Gas discharge light sources

The run-up test shall be applied to light sources which have not been used for a period of at least 1 hour prior to the test. The front fog lamp shall reach at least in the point 0° , 2.5°D on the line 6 a luminous intensity:

After 1 second: 25 per cent of its objective luminous flux;

After 4 seconds: 80 per cent of its objective luminous flux.

The objective luminous flux is indicated on the submitted data sheet.
 - 4.4. Hot re-strike
 - 4.4.1. Filament lamps are exempted from this test.
 - 4.4.2. Gas discharge light sources

The light source shall be started and be operated with the electronic light source control-gear at test voltage for a period of 15 minutes. The supply voltage to the electronic light source control-gear shall then be switched off for a period of 10 seconds, and be switched on again. The light source shall restart directly after being switched-off for a period of 10 seconds. After one second the light source shall emit at least 80 per cent of its objective luminous flux.

4.5. Colour rendering

4.5.1. Red content

In addition to measurements as described in paragraph 7. of this Regulation, the minimum red content of the light of a LED module shall be such that:

$$k_{\text{red}} = \frac{\int_{\lambda=610 \text{ nm}}^{780 \text{ nm}} E_e(\lambda) V(\lambda) d\lambda}{\int_{\lambda=380 \text{ nm}}^{780 \text{ nm}} E_e(\lambda) V(\lambda) d\lambda} \geq 0.05$$

Where:

$E_e(\lambda)$ (unit: W) is the spectral distribution of the irradiance;

$V(\lambda)$ (unit: 1) is the spectral luminous efficiency;

λ (unit: nm) is the wavelength.

This value shall be calculated using intervals of one nanometre.

4.6. UV-radiation

The UV-radiation of a low-UV-type LED module shall be such that:

$$k_{\text{UV}} = \frac{\int_{\lambda=250 \text{ nm}}^{400 \text{ nm}} E_e(\lambda) S(\lambda) d\lambda}{k_m \int_{\lambda=380 \text{ nm}}^{780 \text{ nm}} E_e(\lambda) V(\lambda) d\lambda} \leq 10^{-5} \text{ W/lm}$$

Where:

$S(\lambda)$ (unit: 1) is the spectral weighting function;

$k_m = 683 \text{ lm/W}$ is the maximum value of the luminous efficacy of radiation;

(For definitions of the other symbols see paragraph 4.5.1. above.)

This value shall be calculated using intervals of one nanometre. The UV-radiation shall be weighted according to the values as indicated in the UV table below.

λ	$S(\lambda)$
250	0.430
255	0.520
260	0.650
265	0.810
270	1.000
275	0.960
280	0.880
285	0.770
290	0.640
295	0.540
300	0.300

λ	$S(\lambda)$
305	0.060
310	0.015
315	0.003
320	0.001
325	0.000 50
330	0.000 41
335	0.000 34
340	0.000 28
345	0.000 24
350	0.000 20

λ	$S(\lambda)$
355	0.000 16
360	0.000 13
365	0.000 11
370	0.000 09
375	0.000 077
380	0.000 064
385	0.000 053
390	0.000 044
395	0.000 036
400	0.000 030

UV Table

Values according to "IRPA/INIRC Guidelines on limits of exposure to ultraviolet radiation". Wavelengths (in nanometres) chosen are representative; other values should be interpolated.

- 4.7. Temperature stability
 - 4.7.1. Luminous intensity
 - 4.7.1.1. Filament lamps and gas discharge light sources are exempted from this test.
 - 4.7.1.2. A photometric measurement shall be made after 1 minute of operation with the device at room temperature. The test point to be measured is horizontal 0° vertical 2.5°D.
 - 4.7.1.3. The lamp shall continue operation until photometric stability has occurred. The moment at which the photometry is stable is defined as the point in time at which the variation of the photometric value is less than 3 per cent within any 15-minute period. After stability has occurred, aiming for complete photometry shall be performed in accordance with requirements of the specific device. Photometry at all test points is required for the specific device.
 - 4.7.1.4. Calculate the ratio between the photometric test point values determined in paragraph 4.7.1.2. and the values determined in paragraph 4.7.1.3. above once stability of photometry has been achieved.
 - 4.7.1.5. Apply the ratio calculated in paragraph 4.7.1.4. above to each of the remainder of the test points to create a new photometric table that describes the complete photometry based on 1 minute of operation.
 - 4.7.1.6. The illuminance values measured after one minute and until photometric stability has occurred, shall comply with the minimum and maximum requirements.
 - 4.7.2. Colour

The colour of the light emitted, measured after 1 minute and measured after photometric stability has been obtained, as described in paragraph 4.7.1.3. of this annex, shall be within the required colour boundaries in both instances.
