

-40	1.0	9.7	18.1	25.4	28.6	31.7	37.2	42.1	44.3	46.1	48.4	50.3	53.0
-30	1.0	9.4	17.5	24.5	27.7	30.6	36.0	40.8	43.0	45.1	47.1	49.0	51.7
-20	1.0	9.0	16.8	23.7	26.8	29.7	35.0	39.7	41.9	43.9	45.9	47.8	50.4
-10	0.9	8.7	16.2	22.9	25.9	28.7	33.9	38.6	40.7	42.8	44.7	46.6	49.2
0	0.9	8.4	15.7	22.2	25.1	27.9	33.0	37.6	39.7	41.7	43.6	45.5	48.1
10	0.9	8.1	15.2	21.5	24.4	27.1	32.1	36.6	38.7	40.7	42.6	44.4	47.0
15	0.8	7.9	14.9	21.2	24.0	26.7	31.7	36.1	38.2	40.2	42.1	43.9	46.5
20	0.8	7.8	14.7	20.8	23.7	26.3	31.2	35.7	37.7	39.7	41.6	43.4	46.0
30	0.8	7.6	14.3	20.3	23.0	25.6	30.4	34.8	36.8	38.8	40.6	42.4	45.0
40	0.8	7.3	13.9	19.7	22.4	24.9	29.7	34.0	36.0	37.9	39.7	41.5	44.0
50	0.7	7.1	13.5	19.2	21.8	24.3	28.9	33.2	35.2	37.1	38.9	40.6	43.1
60	0.7	6.9	13.1	18.7	21.2	23.7	28.3	32.4	34.4	36.3	38.1	39.8	42.3
70	0.7	6.7	12.7	18.2	20.7	23.1	27.6	31.7	33.6	35.5	37.3	39.0	41.4
80	0.7	6.5	12.4	17.7	20.2	22.6	27.0	31.0	32.9	34.7	36.5	38.2	40.6
85	0.7	6.4	12.2	17.5	20.0	22.3	26.7	30.7	32.6	34.4	36.1	37.8	40.2

"

Paragraph 6.2.3.2., amend to read:

"6.2.3.2. Drop (impact) test (unpressurized)

...


- (d) From a 45° angle from the vertical orientation with the shut-off valve interface location downward with its centre of gravity \leq at 1.8 m above the ground. However, if the bottom is closer to the ground than 0.6 m, the drop angle shall be changed to maintain a minimum height of 0.6 m and a centre of gravity \neq \leq at 1.8 m above the ground. In case of non-axisymmetric container, the line passing the shut-off valve interface location end and its centre of gravity shall be 45° angled from vertical orientation and the shut-off valve interface location shall become the lowest.

..."

Figure 3 in paragraph 6.2.3.2., amend to read:

Current draft:


Figure 3
Drop Orientations

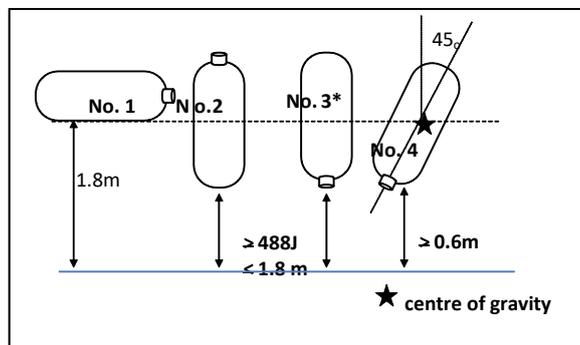

Amended:

" Figure 3

Drop Orientations

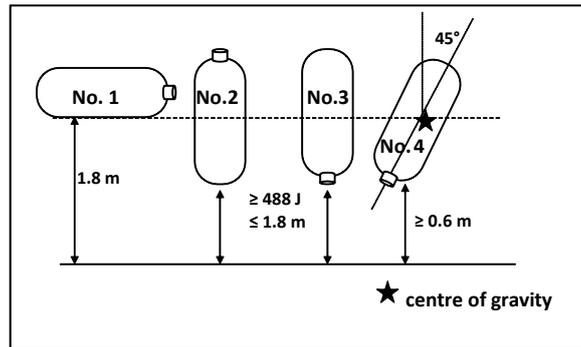

"

Paragraph 6.2.5.4.5.3., amend to read:

"6.2.5.4.5.3. The 60-second rolling averages of individual temperature readings in the localized fire zone (i.e. $T_{B_{LOC}}$, $T_{M_{F_{LOC}}}$, $T_{M_{R_{LOC}}}$ and $T_{U_{LOC}}$) and the engulfing fire zone (i.e. TBR, TBC, TBL, TMRF, TMCF, ~~TMLFTML~~, TMRR, TMCR, TMLR, TUR, TUC and TUL) shall be ..."
