

25 September 2024

Agreement

Concerning the Adoption of Harmonized Technical United Nations Regulations for Wheeled Vehicles, Equipment and Parts which can be Fitted and/or be Used on Wheeled Vehicles and the Conditions for Reciprocal Recognition of Approvals Granted on the Basis of these United Nations Regulations*

(Revision 3, including the amendments which entered into force on 14 September 2017)

Addendum 94 – UN Regulation No. 95

Revision 4 - Amendment 4

Supplement 4 to the 05 series of amendments – Date of entry into force: 15 June 2024

Uniform provisions concerning the approval of vehicles with regard to the protection of the occupants in the event of a lateral collision

This document is meant purely as documentation tool. The authentic and legal binding text is: ECE/TRANS/WP.29/2023/117 and Corr.1.



UNITED NATIONS

* Former titles of the Agreement:


Agreement concerning the Adoption of Uniform Conditions of Approval and Reciprocal Recognition of Approval for Motor Vehicle Equipment and Parts, done at Geneva on 20 March 1958 (original version); Agreement concerning the Adoption of Uniform Technical Prescriptions for Wheeled Vehicles, Equipment and Parts which can be Fitted and/or be Used on Wheeled Vehicles and the Conditions for Reciprocal Recognition of Approvals Granted on the Basis of these Prescriptions, done at Geneva on 5 October 1995 (Revision 2).

Annex 5 - Appendix 2, amend to read:

"Annex 5 – Appendix 2


Force-deflection curves for dynamic tests

Figure 2a
 Blocks 1 and 3

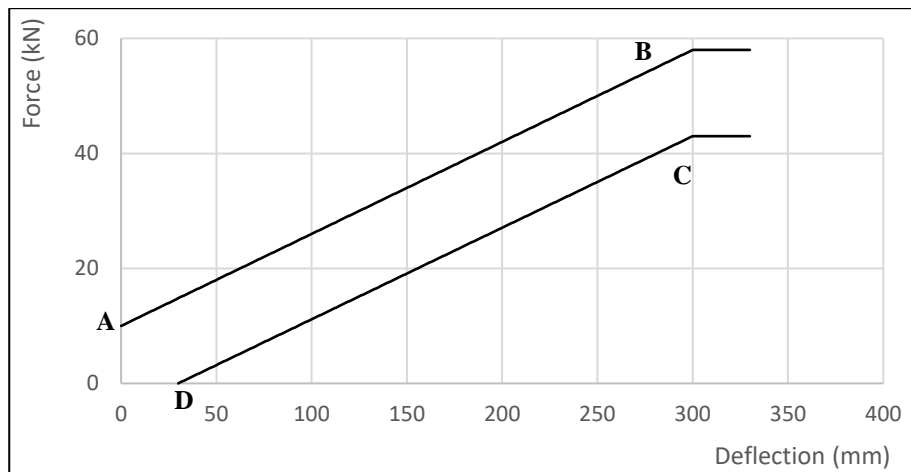


	Deflection	Force
A	0 mm	10 kN
B	300 mm	58 kN
C	300 mm	43 kN
D	30 mm	0 kN

Figure 2b
 Block 2

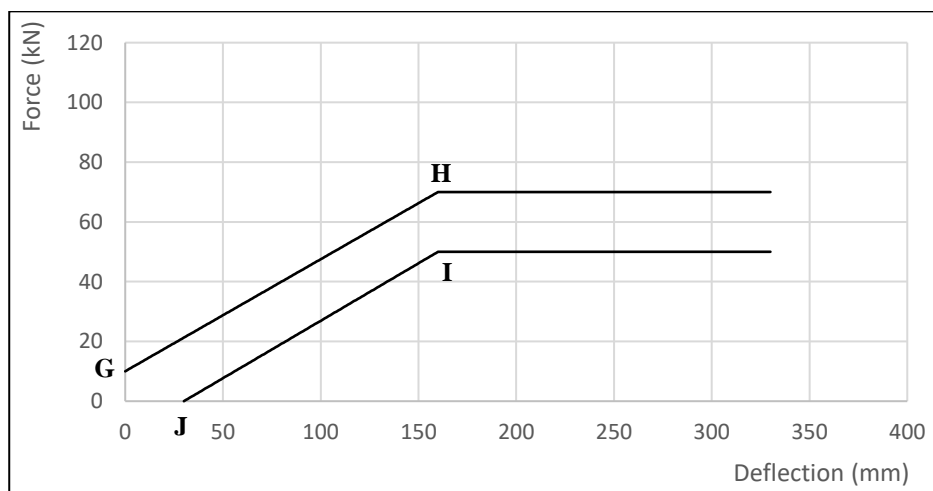


	Deflection	Force
G	0 mm	10 kN
H	160 mm	70 kN
I	160 mm	50 kN
J	30 mm	0 kN

Figure 2c
Block 4

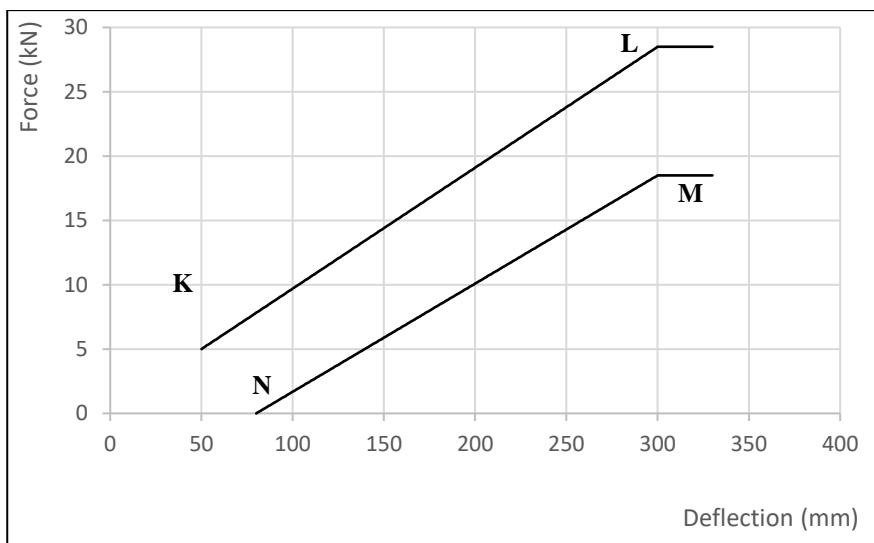


	Deflection	Force
K	50 mm	5,0 kN
L	300 mm	28,5 kN
M	300 mm	18,5 kN
N	80 mm	0 kN

Figure 2d
Blocks 5 and 6

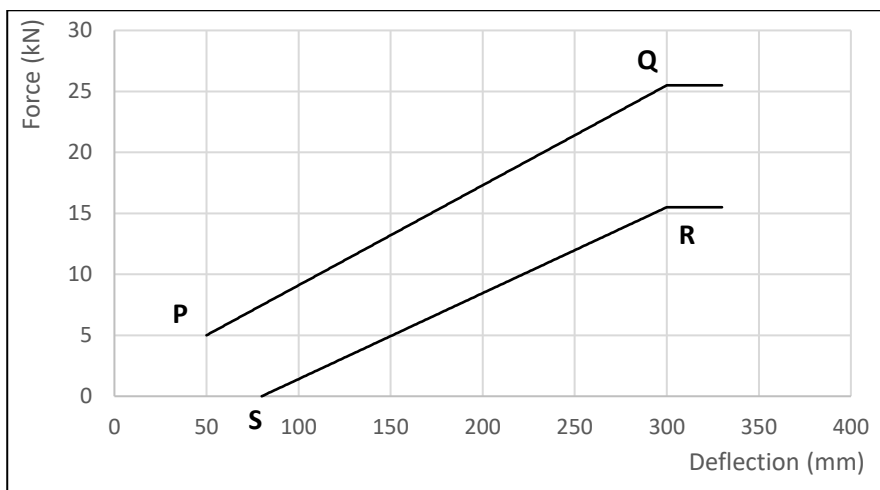

	Deflection	Force
P	50 mm	5,0 kN
Q	300 mm	25,5 kN
R	300 mm	15,5 kN
S	80 mm	0 kN

Figure 2e
Blocks total

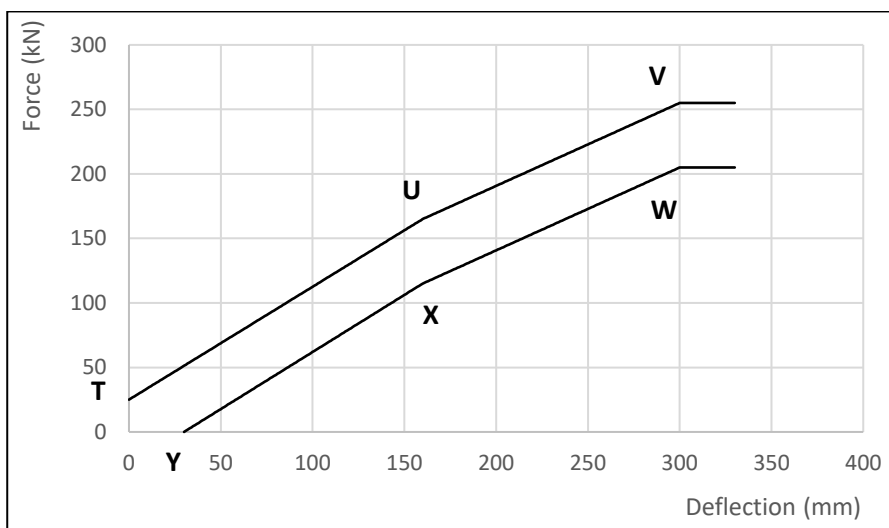

	Deflection	Force
T	0 mm	25 kN
U	160 mm	165 kN
V	300 mm	255 kN
W	300 mm	205 kN
X	160 mm	115 kN
Y	30 mm	0 kN