

U.S. Forest Products Annual Market Review And Prospects, 2010-2014

**James L. Howard, Economist
David B. McKeever, Research Forester
Forest Products Laboratory, Madison, Wisconsin USA**

Abstract

This paper describes the current state of the U.S. economy and provides general and statistical information on forest products markets in terms of production, trade, consumption, and prices. Market developments are described for sawn softwood, sawn hardwood, softwood log trade, wood-based panels, paper and paperboard, fuelwood, forest product prices, and housing starts. Policy initiatives that can affect domestic markets and international trade in wood products are also discussed in some detail. Data are provided through the end of the year 2012 with estimates for 2013 and forecasts for 2014.

Keywords: production, trade, prices, forest products

Acknowledgement

This publication contains contributions from Jesslyn Whitfield, Economics Assistant who organized and compiled much of the data contained in this report.

Executive Summary

Economic activity in the United States exhibited continued weakness during the 3rd quarter of 2013 and the outlook for growth in 2014 is weaker than previous forecast. This outlook is confirmed by the decline in the estimated annual rate of real gross domestic product (GDP) to 1.5% in 2013 down from the previously expected 2.0%. Economic activity during the fourth quarter of 2013 is projected to increase to an annual rate of 2.3%. The rate of growth in the U.S. economy will likely increase slightly in the first half of 2014 then flatten out as predicted by the 41 forecasters surveyed by the Federal Reserve Bank (FRB) of Philadelphia (2013). The lower rate of growth in the U.S. economy predicted for 2014 results partly from the declining growth in exports for the U.S. economy as Europe cuts imports. The indications are that global trade is flat, dimming prospects that exports will buoy the U.S. economy in the coming months as net exports remain at about \$450 billion quarterly. Growth in U.S. real output looks weaker and inflation low over the near term compared to previous estimates. Forecasters as expected see a slight

decline in the 2013 unemployment rate, measured on an annual-average basis. Unemployment is expected to fall from 7.4% in the 3rd quarter of 2013 to 7.2% in the first quarter of 2014 while a decline to 7.3 percent in the fourth quarter of 2013 is expected. The unemployment rate was 8.1% at the beginning of 2012 because many unemployed simply stopped looking for work. The forecasters see prices unchanged in the third quarter of 2013 which is a slightly lower rate than previously expected, and then staying flat in the fourth quarter of 2013 and into 2014. Exceedingly stronger during the first 8 months of 2013 than a year ago as new and existing home sales increased in August, the housing recovery seems to be maintaining momentum. While still remaining close to historic lows, new-home sales grew in August with expectations for continued improvement into 2014 (NAHB 2013a). August housing starts were also encouraging, jumping 7.0 from July. The increase came mostly from the single family sector which the industry finds encouraging. Even though the government shutdown was brief, the housing market is expected to be collateral damage from the budget wrangling in the U.S. Capital. Consumer sentiment is plunging and uncertainty isn't good for potential home buyers.

The growth in the housing sector is having a positive effect on softwood lumber consumption through 2013. According to the Western Wood Products Association (WWPA), during the first 8 months of 2013, softwood lumber consumption increased 8.6% from the same period in 2012, and shipments of softwood lumber from western mills increased 7.9% during the first 8 months of 2013 compared with the same period in 2012. The Southern region continues to have the highest levels of production and shipments of softwood lumber on a volume basis while the West leads in production and shipments of softwood lumber on a percentage basis.

Total structural panel production increased 6.8 percent over the first three quarters of 2013 when compared to the first three quarters of 2012 (APA October 2013). For the first 9 months of 2013 structural panel production was up about 974 million cubic meters when compared to the same time period in 2012. Structural panel consumption at the end of the 3rd quarter of 2013 was 1.5 million cubic meters above the same time period of a year ago representing a 9.3 percent increase for the first three quarters in 2013. Overall, structural panel consumption is expected to increase to 23.0 million cubic meters in 2013 (Adair 2013).

Roundwood production for pulp and wood-based panel mills was 137 million cubic meters in 2012 up slightly from 2011. It is expected that roundwood pulpwood consumption will increase during 2013. Pulpwood supplied from residues should continue to increase in 2013 relative to Roundwood due to and improving housing market and wood products industry. There is also an opposing view that would result in declining residual production that could result from competition for residuals for pellets and biomass. If the decline in pulpwood supplied from residues occur it would not be because of preference on the part of pulp producers.

U.S. Timber exports to China was strong during the first 8 months of 2013 as both softwood lumber and softwood log exports to China are above levels of a year ago. Mills in the Pacific Northwest such as Weyerhaeuser and Plum Creek Timber are benefiting the most from the 2013 surge. China's demand for wood is being fueled by demand for nonresidential construction which has remained strong.

The U.S. furniture industry, in retreat since 1999, was up 4.7% during the first 8 months of 2013 compared to a year ago. The domestic industry market share continues to erode because of low-cost furniture imports, a sluggish global economy, and a need for the industry to become more consumer-focused. Employment in the domestic furniture industry has fallen more than 50% since 1999.

General Economic and Major Market Trends

According to 41 forecasters surveyed by the Federal Reserve Bank of Philadelphia (August 16 2013) the U.S. economy is expected to grow at a slower rate during the 3rd quarter of 2013 than during the 2nd quarter and the expectations of a 4th quarter rebound are slim. The forecasters expect real gross domestic product (GDP) to grow at an annual rate of 1.5% in 2012. The continued pessimism about the labor market accompanies the outlook for weaker output growth. Measured on an annual-average basis, unemployment is expected to average 7.5% in the 3rd quarter before declining to 7.3% in the 4th quarter of 2013 with the 4th quarter revised lower, for an average of 7.5% this year. The 41 forecasters expect unemployment to improve to 7.1% in 2014. This decline in unemployment equates to nonfarm payroll employment growing at a rate of 183,800 jobs per month during 2013 and 180,100 jobs per month during 2014. On an annual-average basis, the forecasters expect job gains of 169,400 per month in during the 3rd quarter 2013 and 178,600 in 4th quarter 2013. During the Great Recession from 2007 to 2009 the impact on the job market was 8 million jobs lost in the worst economic downturn since the 1930's great depression. Almost every sector experienced job cuts: construction lost 2 million jobs, financial services lost 800,000 jobs, and the auto sector where thousands of jobs were lost. There were already about 7 million adults looking for full-time employment before the recession hit in December 2007. The U.S. economy must create about 125,000 new jobs per month just to keep up with population growth and to prevent unemployment from rising. The strength of GDP growth will be the major determinant of when the U.S. economy reaches full employment. With strong GDP growth full employment could be reached in 4 years. But if GDP growth is weak reaching full employment could take 10 years.

Core inflation, as measured by the Price Index for personal consumption expenditures, is expected to average 1.3% in 2013 and rise slightly to 1.8% into 2014. On an annual-average over annual-average basis, inflation in the core consumer Price index is projected to remain around 1.8% in 2013 before increasing to 2.0% in 2013 (Federal Reserve Bank of Philadelphia 2013).

New housing construction showed improvement during the 3rd quarter of 2013 when 891,000 units were started in August at a seasonally adjusted rate (NAHB 2013a). The increase was due mainly to gains of single family starts, which jumped to 628,000 units, up 7% from July. All four regions in the United States contributed to the increase in the level of housing starts during the first three quarters of 2013. Single family starts in the West jumped 17.5% after declining 8.0% in July. After declining in the 1st quarter, starts in the Northeast are still on pace to exceed the 2012 level for 3rd quarter starts. After two months of falling starts the Midwest and South saw starts rise in August. The South is the largest region for multifamily starts and the annual rate increased 48.8% in August. The west region also experienced significant increases in

August. Single-family building permits in August increased from 609,000 in July to 627,000 in August, a 3.0% increase. The increase in starts reported in the Northeast and Midwest coincided with increases in permits of 10.0% and 4.3% respectively. The South experienced a decrease in building permits of 46,000 in August from July. New single-family units completed increased in August by .5%, from 570,000 in July to 573,000 units in August. Total housing starts for 2012 were 781 thousand units and the expectations for 2013 are for significant improvement.

In August 2013, the total value of all new construction in the U.S. was \$915 billion, \$61 billion above the annual 2012 value of \$854 billion (NAHB 2013a). The seasonally adjusted annual rate for the total value of new construction was above the 2012 annual rate for each month through August in 2013. Residential construction was \$340 billion in August 2013, \$53 billion above the \$287 billion annual rate of residential construction in 2012. Nonresidential construction was \$288 billion during August 2012, 4% below the \$300 billion in 2013. Public construction in 2013 accounted for nearly 30% of all construction. The National Association of Home Builders 2013 forecast calls for the housing sector to improve in the 4th quarter and starts and sales overall for 2013 will end the year above 2012 levels.

With a large forest resource and high production and consumption of wood products, the United States continues to play an important role in world forest product markets. For the past two years the U.S. role on the world stage has improved as a result of the on-going recovery in the wood segment of America's economy, precipitated by the rise in residential construction and production of building materials. The United States is a world leader in the consumption of paper and paperboard (about 74 million metric tons in 2012), which is mostly supplied by domestic production and imports from Canada (AF&PA 2013). Domestic paper and paperboard production for the first 9 months of 2013 was about .2% below the production for the first 9 months of 2012. The U.S. solid wood industry manufactured about 62 million cubic meters of lumber and 17 million cubic meters of structural panel products in 2012. For the first 8 months of 2013 softwood lumber production was 5.6% above 2012 production and for the first 8 months of 2013, structural panel consumption was 9.3% above 2012 levels. The U.S. forest products industry's annual harvest was 371 million cubic meters in 2012, exceeding the 361 million cubic meters harvested in 2011. Domestic roundwood timber harvest in 2013 that supports domestic consumption is expected to be above the 2012 harvest level.

Table 1—Selected U.S. economic indicators, 2010–2014.

Indicator	Actual ^a			Estimate ^b	Forecast ^c
	2010	2011	2012	2013	2014
Gross domestic product (billion 2005 dollars)	13,063	13,299	13,593	13,706	14,001
New housing starts (million units)	0.587	0.609	0.781	0.924	1.197
Mobile home shipments (thousand units)	50	51	55	57	59
Total residential fixed investment (billion 2005 dollars)	332.2	327.6	367.1	404.6	422.4
Total nonresidential fixed investment (billion 2005 dollars)	1,268.5	1,378.2	1,487.9	1,520.6	1,562.8
Total industrial production (Index: 2007=100)	90.6	93.6	97.1	99.4	102.6
Furniture and related products (Index: 2002 = 100)	73.0	65.0	69.0	70.0	72.0
Paper products (Index: 2002 = 100)	80.0	83.0	84.0	86.0	88.0

Sources:

^aBoard of Governors of the Federal Reserve System. 2013, Council of Economic Advisors. 2013, National Association of Home Builders. Nov, 2013a, U.S. Department of Commerce, Bureau of the Census. 2013.

^bForest Service estimates based on 2012 actual data and preliminary 2013 data.

^cNational Association of Home Builders. 2013b, Survey of Professional Forecasters and Forest Service estimates.

Expenditures for residential repair and remodeling fell in 2012 to \$116 billion down 38% from the record high years of 2006 and 2007. The recovery in the housing market is also reflected in residential remodeling averaging \$130 million monthly for the first three quarters of 2013. In 2007 the U.S. Department of Commerce stopped collecting residential repair and remodeling data. The estimates for 2012 and 2013 presented here are Forest Service estimates based on private residential construction expenditures. The National Association of Home Builders Remodeling Market Index (RMI) climbed to 57.0 in the 3rd quarter 2013 up from 50.0 in the 2nd quarter of 2012. This index level is above the record level in 2004 prior to the housing market crash. During this same period new residential construction exhibited strengthening and continues do so into the 3rd quarter 2013. Since 2000, expenditures for maintenance and repairs to all existing residential properties have averaged about 25% of total expenditures, with the remaining 75% for improvements. Given the unprecedented levels of home foreclosures in the United States in recent years, residential improvements and repairs may be an even bigger part of the economy than usual. Many foreclosed homes need significant maintenance to become marketable. Expectations are for continued and growing investments in existing residential properties.

The three major indicators of demand for wood products—furniture and related products, paper products output, and total industrial production—were higher during the first 8 months of 2013 relative to 2012.

- Industrial production, an important demand determinant for pallet lumber, containerboard, and some grades of paper, increased 2.3% during the first 8 months of 2013 when compared to the annual level for 2012.
- Furniture and related products output, a determinant of high-grade lumber production, was up during the first 8 months of 2012 by 1.4%.

- Paper products output, a determinant of pulpwood and wood residue use, as well as recycled fiber availability and use, increased during the first 8 months of 2013 compared with the 2012 average. The index (2007 = 100) of paper products output for the first 8 months of 2013 was 2.3% above the 2012 average for the comparable time period.

In summary, the housing sector gained strength during the first 3 quarters of 2013 and is expected to continue to improve the 4th quarter of 2013 and this strength is expected to continue into 2014. Starts in 2013 will probably exceed year-ago levels significantly. With the slow rate of growth in GDP, most analysts predicted that conditions favorable to the growth of timber markets wouldn't occur until the 2nd half of 2013 and those predictions have held true, although 2013 has been a good year overall. Selected U.S. economic indicators are shown in Table 1.

Timber Products Production, Trade, and Consumption

Statistics and Prospects

Prospects for wood and wood products are shown in Table 2. All volumes are reported in 1,000 cubic meters. Data for 2013 are preliminary estimates, data for 2014 are forecasts.

Table 2—Prospects and statistics for wood and wood products, 2011-2013^a

Sawn softwood				Oriented strandboard (OSB)			
	2011	2012	2013		2010	2011	2012
Production	48,035	48,776	49,022	Production	9,768	9,780	9,802
Imports	16,768	16,800	17,000	Imports	2,990	2,995	3,000
Exports	2,688	2,701	2,744	Exports	335	340	350
Consumption	62,115	62,875	63,278	Consumption	12,423	12,435	12,452
Coniferous logs				Particleboard			
	2012	2013	2014		2012	2013	2014
Production	117,002	119,031	120,008	Production	3,760	3,820	3,853
Imports	1,601	1,666	1,805	Imports	529	545	550
Exports	6,102	5,900	5,986	Exports	63	60	65
Consumption	112,501	114,797	115,827	Consumption	4,226	4,305	4,338
Sawn hardwood				Medium density fiberboard (MDF)			
	2012	2013	2014		2012	2013	2014
Production	14,632	14,882	14,901	Production	2,886	2,886	2,900
Imports	595	600	615	Imports	881	881	890
Exports	2,574	2,580	2,601	Exports	620	620	640
Consumption	12,653	12,902	12,915	Consumption	3,147	3,147	3,150
Hardwood logs				Insulation board			
	2012	2013	2014		2012	2013	2014
Production	30,881	31,622	31,706	Production	2,755	2,755	2,755
Imports	229	240	265	Imports	150	177	177
Exports	962	980	1,001	Exports	129	140	140
Consumption	30,148	30,882	30,970	Consumption	2,776	2,792	2,792
Coniferous plywood				Roundwood pulpwood			
	2012	2013	2014		2012	2013	2014
Production	8,125	8,266	8,301	Production	137,494	137,820	138,721
Imports	2,449	2,501	2,566	Imports	533	548	566
Exports	908	940	965	Exports	446	463	475
Consumption	9,666	9,827	9,902	Consumption	137,581	137,905	138,812
Non-coniferous plywood				Hardboard			
	2012	2013	2014		2012	2013	2014
Production	1,418	1,492	1,509	Production	649	655	660
Imports	2,303	2,388	2,397	Imports	180	185	185
Exports	176	192	201	Exports	227	239	240
Consumption	3,545	3,688	3,705	Consumption	602	601	605

^aAll volumes are reported in 1,000 cubic meters. Figures for 2013 are Forest Service linear extrapolated estimates, 2014 are Forest Service linear extrapolated forecasts when industry forecasts are unavailable.

^bRevised.


U.S. Wood Product Market Shares

Annual U.S. solid wood products production and foreign trade data are collected annually by governmental agencies and industry associations. This information provides an overview of how robust the wood using sectors of the U.S. economy are, and how their performance has changed over time (Howard 2011). But it does not provide detailed information specific to individual end-use markets needed to further evaluate changing patterns of consumption. End-use markets of interest include new single family, multifamily, and mobile home construction, repair & remodeling of existing residential structures, low-rise nonresidential building and other types of nonresidential construction, furniture and other manufactured wood products, and packaging and shipping. These end-use markets typically account for 80 to 90 percent of all solid wood products consumption. Market share estimates presented here are based on findings from limited public and private research reports that were related to more readily available, annual economic indicator data specific to each end-use market. Consumption was then balanced over all end uses, and market shares developed. These estimates provide a consistent, reliable look at solid wood products markets in the U.S. (McKeever and Howard 2011).

Table 3 presents annual balanced wood products consumption by end use for sawn wood, structural panels, and nonstructural panels for the period 2006 through 2011, with preliminary estimates for 2012 and forecasts for 2013. Figure 1 shows market shares for all solid wood products combined for the same time period.

Sawn Softwood

Housing and other construction markets started off strong in 2013 and strengthened into the 3rd quarter 2013. The housing market is likely to finish the year at a slightly higher level than

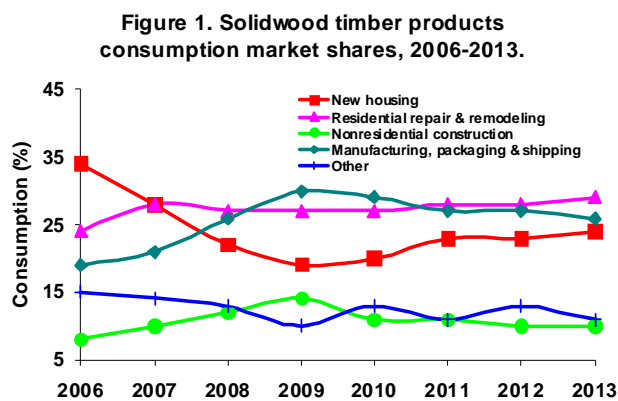

recorded a year ago. The housing sector is improving as evidenced by its overall increasing market share and is having a positive effect on softwood lumber consumption (Fig. 1, Table 3). According to the Western Wood Products Association (WWPA), during the first 8 months of 2013, softwood lumber consumption increased 8.6% from the same period last year, and shipments of softwood lumber from western mills also increased 9.0% during the first 8 months of 2013 compared with the same period in 2012 (WWPA 2013). Production

increased during this period in the South 3.6%. Apparent consumption for the first 8 months of 2013 was 45.2 million cubic meters, 7.9% above the 41.6 million cubic meters for the first 8 months of 2012. As predicted, the U.S. housing construction industry grew over the 1st half of

2013. Timber production as a result of a strengthening domestic market continued to increase in 2013 slightly above the 2012 timber growth level. (Softwood production through the first 8 months of 2013 was 34.2 million cubic meters which was up 5.3% when compared to the first 8 months of 2012 when 32.4 million cubic meters of sawn softwood were produced. Production of sawn softwood for 2013 is forecast to exceed 2012 levels, and then continue to rebound with a gradual increase in 2014.

Sawn softwood imports increased 13.8% during the first 8 months of 2013 relative to the same time period a year ago. The volume of Canadian imports, which constituted 90% of all sawn softwood imports, increased by 13.0% over this period. Total sawn softwood imports were 16.8 million cubic meters in 2012.

During the first 8 months of 2013, U.S. sawn softwood exports increased 8.9% compared with exports for the same period in 2012. Exports to Canada increased by 3.0%, while exports to china increased 25.6 % and exports to Mexico decreased 2.0%.

Sawn Hardwood

Sawn hardwood production is expected to increase to 14.9 million cubic meters in 2013. Imports in 2013 are expected to increase from one year earlier. Given the increase in U.S. production and imports as well as a strengthening housing market, apparent consumption for 2013 is forecast to exceed the 2011 volume.

Softwood Log Trade

Softwood log exports to China increased over the first 8 months of 2013 when compared with exports in the same period of 2012 increasing by 30.0%. Softwood log exports to Canada increased by 3.9% in the same period. Softwood log exports to all other countries increased by 2.3% during the first 8 months of 2013 when compared with the same time period of one year ago. Fueling the increase in softwood log exports especially during the third quarter of 2013 is the increased exports to China as China's economy enters a period of expansion. Most of the increase has been centered in the Pacific Northwest. Overall, the volume of U.S. logs shipped to China rose by more than 10 times from 256,000 cubic meters in 2007 to an estimated 2.2 million in 2012, or about 7% of the region's total log production. Softwood log imports decreased by 24.1% over the first 8 months of 2013 compared with a year earlier. During 2012, the timber harvest surpassed the 2011 harvest and the forecast calls for a further rise in harvest in 2013.

Hardwood Log Trade

Hardwood log exports increased by 2.2% and imports rose by 38.9% during 2012 compared with 2011. Canada traditionally provides about 95% of U.S. imports. The trend in hardwood log exports was up from a year ago through the first 8 months of 2013. Hardwood log imports were also up slightly through the first 8 months of 2013 when compared to 2012.).

Pulpwood

Roundwood production for pulp and wood-based panel mills was 137 million cubic meters in 2012, up slightly from 2011. Roundwood pulpwood consumption is expected to decrease during 2013 as indicated by a 0.2 % decline in paperboard production over the first 8 months of 2013. Pulpwood supplied from residues continued to decrease relative to roundwood. This is a result of declining residual production and competition for residuals for pellets and biomass and not out of preference on the part of pulp producers. The residue portion of pulpwood was 59.4 million cubic meters in 2012, unchanged from 2011 (Howard 2013). Trade patterns have continued to have a significant impact on paper and paperboard production and have affected pulpwood use, but the significant decline in U.S. paper and board production and consumption that occurred over the past decade was largely due to a downturn in consumer spending associated with the United States and global recession. **Exports** of paper, paperboard, and converted products increased by 1.0% to 13.9 million metric tons, while imports of paper and paperboard decreased by 3.5% to 9.3 million metric tons in 2011. Paper and paperboard production decreased by .7 % in 2012 falling to 73.4 million metric tons. The production of paper and paperboard in 2013 is forecast to be roughly the same as 2012 production as reflected in the annual year to date rate for September 2013 of 60.8 million metric tons, which is down .2% from 2012 when paper and paperboard was produced at a level of 60.9 million metric tons. Paper and paperboard imports were at an annual rate in September of 9.1 million metric tons which is down 5.8% from last year.

Structural Panels

Structural panel production in 2012 was 5.9% above that of 2011, while consumption was 6.7% above consumption in 2011 (APA 2013). Structural panel production at the end of the 3rd quarter of 2013 was 14.4 million cubic meters which is above the 1st 3 quarters of 2012. Overall, structural panel production is expected to decrease to 21.0 million cubic meters in 2013 (Adair 2013). Structural panel market shares were negatively affected by the recent economic downturn. New residential construction which, in 2006, captured 46% of all structural panel consumption, fell to 35% in 2011, and is expected to continue recovering in 2013 (Table 3)

In 2012, 9.8 million cubic meters of oriented strandboard (OSB) were produced (Table 2). OSB consumption totaled 12.4 million cubic meters in 2012 and constituted 60% of the structural panel market (Table 3). This represented a 4% share decrease from 2008. Consumption is expected to further increase in 2013. At the end of the 3rd quarter 2013, OSB consumption was 10.6 million cubic meters, 12.2% above the first 3 quarters of 2012. The continuing economic recovery and growing residential construction sector is expected to increase OSB consumption in 2013 to near 16 million cubic meters.

Softwood plywood production was 8.1 million cubic meters in 2012 (Table 2) (APA 2013). This level of production was 2.2% above 2011. Softwood plywood production at the end of the 3rd quarter in 2013 was 6.3 million cubic meters, 2.0% above 2012 when compared to the numbers at the end of 3rd quarter in 2012. The volume of softwood plywood production fell throughout the 1990s, and the decline continued into 2011 before improving in 2012. Softwood plywood imports decreased in 2012 by 12.2% compared with 2011 data, while softwood plywood third quarter exports increased in 2012 by 0.8%. Plywood exports to Canada decreased by 39% during

the first 8 months in 2013 compared with a year earlier, and plywood imports from Canada decreased 10%. Softwood plywood consumption was 6.1 million cubic meters at the end of the third quarter 2013 which was 4.1% above last year. Apparent consumption of softwood plywood is expected to increase in 2013 and 2014.

Hardwood Plywood

Hardwood plywood production, including core material such as softwood plywood and OSB, was estimated at 1.3 million cubic meters in 2012, unchanged from 2011 production. Hardwood plywood imports increased 22% in 2010 climbing to 2.3 million cubic meters when compared to 2009. Hardwood plywood exports rose in 2010, increasing 43.2% to 185 thousand cubic meters. Production and consumption of hardwood plywood in 2010 and 2011 is forecasted to steadily fall to 2008 levels (Table 2). These declines are a result of falling Total Industrial Production and Furniture and Related Products indexes (Table 1), coupled with the U.S. housing market collapse.

Particleboard and Medium Density Fiberboard

Information from the Composite Panel Association (CPA 2012) indicates that particleboard and medium density fiberboard (MDF) production increased slightly during 2012. Particleboard production was 3.8 million cubic meters, a decrease of 7.8%, and MDF production was 2.9 million cubic meters, an increase of 10.5% (Table 2). During 2012, particleboard and MDF imports combined increased on a volume basis, compared with 2011. Particleboard and MDF exports also increased in 2012 over 2011. Consumption of particleboard and medium-density fiberboard combined declined slightly in 2012 when compared to 2011. Particleboard and MDF account for well over one-half of all nonstructural panels consumed in the U.S., although they aren't a large component in residential construction. Although they aren't a large component in residential construction, their market share fell by nearly half between 2006 and 2010 (Table 3).

Hardboard

Based on data from the Composite Panel Association (CPA 2011), 649 thousand cubic meters of hardboard were produced in 2012; this level of production is expected to increase slightly in 2013. Hardboard imports and exports are expected to remain flat over the next two years.

Insulation Board

Information from the American Forest & Paper Association (AF&PA 2013) showed that 2.7 million cubic meters of insulation board was produced in 2012, unchanged from 2011. Production of insulation board has been flat for several years, resulting in a stable level of apparent annual consumption of about 3.0 million cubic meters.

Fuelwood

Using data from a 2012 Department of Energy survey (DOE 2012c) and adjusting for the 2012 winter weather and a increasing trend in fuelwood use per household, fuelwood consumption

Table 3.--Wood product market shares in the U.S., by end use, 2006 through 2013.

Year	Residential construction															Pack-aging & shipping	Total, all end uses	Other
	New housing				Repair & remodel-ing	Nonresidential construction					Total construction	Manufacturing						
	New single family	New multi-family	Manu-factured housing	Total		Build-ings	Other	Total	Furni-ture	Other mfg		Total						
					Total													
Sawn softwood ^a																		
2006	32%	3%	2%	37%	29%	66%	5%	1%	6%	72%	2%	3%	5%	6%	83%	17%		
2007	26%	3%	2%	31%	34%	64%	7%	1%	8%	73%	2%	3%	6%	7%	86%	14%		
2008	20%	4%	1%	25%	34%	59%	10%	1%	11%	70%	3%	4%	7%	9%	86%	14%		
2009	18%	2%	1%	21%	35%	57%	11%	2%	13%	69%	3%	6%	9%	10%	89%	11%		
2010	20%	2%	1%	23%	35%	59%	9%	2%	10%	69%	3%	5%	8%	10%	87%	13%		
2011	24%	2%	1%	27%	36%	63%	8%	2%	10%	73%	3%	5%	8%	9%	90%	10%		
2012	24%	2%	1%	27%	36%	63%	8%	2%	10%	73%	2%	5%	7%	9%	90%	10%		
2013	25%	2%	1%	28%	37%	65%	8%	2%	10%	75%	2%	5%	6%	8%	90%	10%		
Sawn hardwood																		
2006	7%	1%	0%	8%	8%	17%	4%	8%	12%	29%	12%	10%	22%	36%	87%	13%		
2007	6%	1%	0%	7%	8%	14%	4%	9%	13%	28%	12%	6%	17%	40%	84%	16%		
2008	4%	1%	0%	4%	5%	9%	5%	9%	14%	23%	13%	6%	18%	44%	85%	15%		
2009	3%	0%	0%	4%	3%	6%	6%	7%	14%	20%	15%	5%	20%	52%	92%	8%		
2010	4%	0%	0%	4%	3%	7%	5%	7%	12%	18%	14%	5%	19%	50%	87%	13%		
2011	4%	0%	0%	5%	3%	7%	5%	6%	11%	18%	13%	5%	18%	48%	84%	16%		
2012	4%	0%	0%	5%	3%	7%	5%	6%	11%	18%	13%	5%	18%	48%	84%	16%		
2013	5%	0%	0%	5%	4%	9%	5%	6%	11%	20%	12%	4%	17%	47%	83%	17%		
Total sawnwood																		
2006	28%	3%	2%	32%	25%	58%	5%	2%	7%	65%	4%	4%	8%	11%	83%	17%		
2007	22%	3%	1%	26%	29%	55%	7%	2%	9%	64%	4%	4%	8%	13%	85%	15%		
2008	16%	3%	1%	21%	28%	48%	9%	3%	12%	60%	5%	5%	9%	16%	86%	14%		
2009	15%	1%	1%	18%	28%	46%	10%	3%	13%	59%	6%	6%	11%	19%	89%	11%		
2010	17%	1%	1%	19%	29%	48%	8%	3%	11%	58%	5%	5%	11%	18%	87%	13%		
2011	20%	2%	1%	22%	29%	51%	7%	3%	10%	61%	5%	5%	10%	17%	89%	11%		
2012	20%	2%	1%	22%	29%	51%	7%	3%	10%	61%	5%	5%	10%	17%	89%	11%		
2013	20%	2%	1%	23%	29%	52%	7%	3%	10%	61%	5%	5%	10%	17%	89%	11%		
Coniferous plywood																		
2006	20%	2%	1%	23%	38%	61%	13%	2%	14%	75%	4%	11%	15%	5%	95%	5%		
2007	15%	2%	1%	18%	41%	59%	12%	2%	14%	73%	4%	12%	16%	6%	95%	5%		
2008	12%	3%	1%	15%	39%	55%	11%	2%	13%	68%	5%	16%	22%	7%	96%	4%		
2009	10%	1%	0%	12%	38%	50%	13%	2%	15%	65%	6%	20%	26%	8%	98%	2%		
2010	11%	1%	0%	13%	38%	51%	10%	2%	12%	63%	6%	19%	24%	7%	95%	5%		
2011	13%	1%	1%	15%	39%	54%	9%	2%	12%	65%	5%	18%	23%	7%	95%	5%		
2012	13%	1%	1%	15%	39%	54%	9%	2%	12%	65%	5%	18%	23%	7%	95%	5%		
2013	14%	1%	1%	15%	40%	55%	9%	2%	12%	67%	5%	17%	22%	6%	95%	5%		
Oriented strandboard (OSB)																		
2006	53%	3%	3%	60%	17%	77%	6%	1%	7%	84%	0%	0%	1%	1%	86%	14%		
2007	45%	4%	3%	51%	20%	71%	10%	1%	11%	83%	0%	0%	1%	2%	86%	14%		
2008	35%	4%	3%	43%	21%	64%	16%	2%	17%	81%	0%	1%	1%	3%	85%	15%		
2009	34%	2%	2%	39%	22%	61%	20%	2%	22%	83%	0%	1%	1%	3%	88%	12%		
2010	37%	2%	2%	42%	23%	64%	16%	2%	18%	82%	0%	1%	1%	3%	86%	14%		
2011	44%	2%	3%	49%	23%	71%	15%	2%	17%	88%	0%	1%	1%	3%	92%	8%		
2012	44%	2%	3%	49%	23%	71%	15%	2%	17%	88%	0%	1%	1%	3%	92%	8%		
2013	44%	2%	3%	49%	24%	73%	15%	2%	17%	90%	0%	0%	0%	3%	92%	8%		
Total, structural panels																		
2006	41%	3%	2%	46%	25%	71%	9%	1%	10%	81%	2%	4%	6%	3%	89%	11%		
2007	34%	3%	2%	39%	28%	67%	11%	2%	12%	79%	2%	5%	7%	4%	89%	11%		
2008	26%	4%	2%	32%	28%	60%	14%	2%	16%	76%	2%	7%	9%	4%	89%	11%		
2009	24%	2%	2%	27%	29%	56%	17%	2%	19%	76%	3%	9%	11%	5%	92%	8%		
2010	26%	2%	2%	30%	29%	59%	13%	2%	15%	74%	3%	8%	11%	5%	90%	10%		
2011	31%	2%	2%	35%	29%	64%	13%	2%	15%	79%	2%	8%	10%	5%	94%	6%		
2012	31%	2%	2%	35%	30%	65%	13%	2%	15%	80%	2%	7%	9%	4%	93%	7%		
2013	32%	2%	2%	36%	31%	67%	13%	2%	15%	82%	1%	7%	8%	4%	93%	7%		
Nonstructural panels ^b																		
2006	23%	3%	2%	28%	18%	46%	7%	0%	8%	53%	19%	14%	33%	1%	87%	13%		
2007	17%	3%	1%	21%	21%	42%	9%	0%	9%	51%	19%	16%	35%	1%	87%	13%		
2008	12%	3%	1%	16%	19%	34%	12%	0%	12%	46%	21%	19%	41%	1%	88%	12%		
2009	10%	1%	1%	12%	18%	29%	11%	0%	12%	41%	24%	22%	46%	2%	89%	11%		
2010	11%	1%	1%	13%	18%	30%	9%	0%	9%	40%	22%	21%	43%	1%	84%	16%		
2011	12%	1%	1%	15%	18%	33%	8%	0%	9%	41%	21%	20%	41%	1%	84%	16%		
2012	12%	1%	1%	15%	18%	33%	8%	0%	9%	41%	21%	20%	41%	1%	84%	16%		
2013	13%	1%	1%	15%	19%	34%	8%	0%	9%	43%	20%	20%	40%	1%	83%	17%		

^aIncludes laminated veneer lumber.


^bIncludes particleboard, medium density fiberboard, insulation board, hardboard and non-coniferous plywood.

was

estimated to be 40.0 million cubic meters in 2012—a increase of 3.4% from 2011. Households use most fuelwood for heating and aesthetic enjoyment. Industry uses mill residues rather than roundwood for fuel. A small portion of roundwood fuelwood is used for electric power production. Use for electric power is limited by the low cost of coal and natural gas alternatives. Fuelwood consumption for 2012 was above the level for 2011 and the forecast calls for increased fuelwood consumption through 2013. Renewable Fuel Standards and other biomass-related energy policies are unlikely to increase the growth rate for fuelwood production and consumption, but likely to increase other forms of wood energy use such as Pellets.

Forest Products Prices

Trends in the wholesale price of forest products are different across two broad categories: lumber and wood products (such as lumber and wood-based panels) and pulp and paper products (Fig. 2). Throughout the late 1990s, the producer price of lumber and wood products as reflected by the producer price index (PPI) continued to fluctuate around a level reached by the mid-1990s

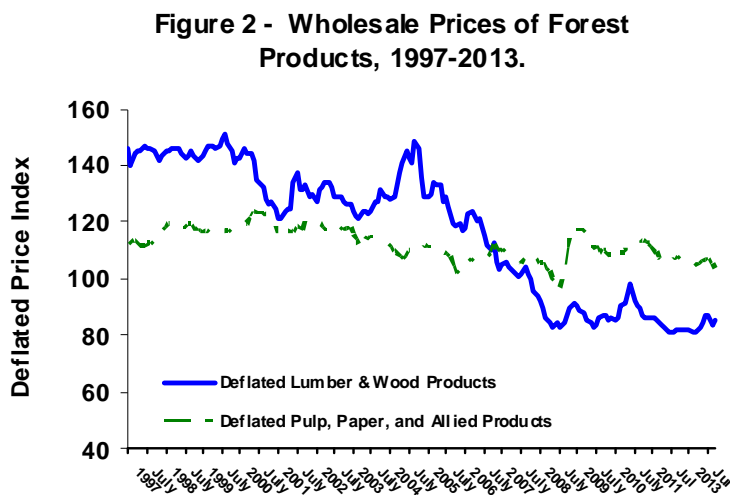

before peaking during the second half of 1999 (USDL 2011). The PPI for lumber and wood products continued to decrease during the 1st quarter of 2008, but rose and peaked in the 3rd quarter, and then declined again in the 4th quarter. The PPI for lumber was down 7.3 points in 2009 from 2008. Changes in the price of softwood lumber and a depressed lumber market accounted for much of this change and most of the volatility in the index. In 1999, the deflated composite price

index reached an all-time high (at a level more than 50% higher than that of the base year, 1982), followed immediately by a sustained decline that continued throughout 2000 and into 2011. The PPI reached its lowest level in 5 years during this period. The PPI for both lumber and pulp paper and allied products have been increasing since 2011, throughout 2012, and into 2013. Because of these sustained low prices, U.S. demand for lumber and wood products during 2000 and into 2005 remained near record levels. But the current strengthening in the housing market has caused an uptick in the price levels during this current resurgence fueled also by the increase in demand for wood products as a result of rebuilding made necessary by damage incurred from tropical storm Sandy. In contrast, the PPI of prices in the pulp and paper sector has exhibited considerably less short-term volatility. In deflated terms, the composite index began 2008 with a flat to declining trend, before undergoing an upturn in the third quarter of 2008 that became flat

in the first quarter of 2009 before fluctuating throughout 2011 but increasing into the 4th quarter of 2013.

Energy Policy Initiatives

Wood Energy

The wood energy market in the US is composed of four major sectors: industrial (68%), residential (20%), electricity (9%), and commercial (3%). The industrial sector represents the wood products, pulp and paper industry; and the amount of wood energy it consumes has been mainly linked to wood product output rather than public policies. The other three sectors have been where public policy is focused at the state and federal level. Historically, public policy was focused on promoting the use of biomass for electricity while, in recent years, there has been a shift to greater support for liquid fuels for transport.

The most effective federal incentives introduced since 2004 according to recent publications appear to be (a) the Renewable Energy Production Tax Credits, (b) Clean Renewable Energy Bonds, (c) Qualified Energy Conservation Bonds, (d) Investment Tax Credits (Aguilar et al., 2011). All of these incentives are tailored to the electricity generation sector. Recent publications also suggest that the eligibility of open-loop biomass plants (i.e. not relying on bio-energy dedicated crops, but instead on material harvested from working forest and industry co-products) for Renewable Energy production Tax Credits have favored the greater use of woody materials, especially in the electricity sector.

Biomass Crop Assistance Program (BCAP) implementation guidelines (section 9.4.1.2) have been recently updated. BCAP, a policy established to help meet US Federal Renewable Fuel Standards, mandates increased national biofuel use to reach 36 billion gallons a year by 2022, with 21 billion gallons per year from advanced biofuels (US Public Law 110-140).

Wood pellet manufacturing is the most dynamic wood energy sector in the US because of increases in capacity and production of industrial pellets for export in the European Union (EU). US export capacity has increased from less than 100,000 tonnes in 2008 to almost 2 million tonnes in 2012. Pellet production for the local market and use for US residential heating is stalled but industrial pellet use is increasing with current production capacity estimated at about 5 million tonnes (Spelter, 2012).

Biomass Energy

The renewed growth in the world economy has had a significant impact on wood and energy demand with the near-term future of U.S. wood and energy markets tied to the United States domestic upturn from the recession that started in 2008. The growing concern about greenhouse gas (GHG) emissions and its effect on energy investment decisions, the increasing use of renewable fuels, the increasing production of unconventional natural gas, the shift in the transportation fleet to more efficient vehicles, and improved efficiency in end-use appliances are the result of U.S. energy concerns. The continued improvement of the world's financial markets

is especially important for the wood and energy supply outlook, because the capital-intensive nature of most large projects makes access to financing a critical necessity.

Although the electricity sector has been a major beneficiary of federal public policy support, it has recently been facing increased scrutiny because of Greenhouse Gas (GHG) emissions. Whether power generation using woody feedstock is considered a GHG carbon-neutral option is undergoing debate. On January 12, 2011, the US Environmental Protection Agency (EPA) announced its plan to defer for three years the requirement for GHG permits for CO₂ emissions from biomass-fired and other biogenic sources (EPA, 2011b).


EPA has been developing guidelines to restrict emissions from certain stationary sources, such as electric power plants. EPA has suggested the possibility that emissions from biomass might be treated on the same terms as emissions from fossil fuels. At the same time it recognized the uncertainty about the carbon offset benefits of wood and other biomass sources (EPA, 2010). Biogenic CO₂ emissions being reviewed include diverse sources such as those derived from combustion of biological material, including all types of wood and wood co-products, forest residues, and agricultural material (EPA, 2011a).

The pellet fuels Institute has been created as a North American trade association to promote energy independence through the efficient use of densified biomass fuel.

Summary of Timber Products and Energy Policy

The past year has been a volatile one for United States wood and energy markets, with oil prices rising throughout 2012 and into 2013 and wood markets gaining strength. Economic activity in the United States was improving in 2012 and has shown strength during the first 3 quarters of 2013 as evidenced by the increase in real GDP growth to an expected 2.2 % in the third quarter 2013, signaling renewed strength in major sectors of the economy. With stronger GDP growth during the second half of 2013, resulting partly from the continued improvement in the housing sector as reflected in the rise in building permits, increasing employment, and renewed confidence about the financial system there is increased enthusiasm and expectations to expect better economic conditions into 2014. Also, with more new home purchases instead of home refinancing and stronger GDP growth which is an indicator of employment growth, the recovery of the U.S. economy seems on track. The current inflationary pressures are in decline and unemployment falling, leading to higher expectations for the U.S. economy. The future strength for other domestic and foreign trade sectors of the wood products industry also depends on the general economy, future lumber prices (which are stronger in 2013), the improving housing sector, and the strengthening value of the dollar. U.S. timber exports to China were strong in 2012 and into 2013. The future strength of the U.S. trade sector is also buoyed by surging exports to Mexico. As a result of increased tariffs on wood exports in 2007 from Russia, Chinese buyers have turned to Canada and the U.S. for wood amid the Country's construction rebound. If the surge in exports to Mexico is sustained and if the housing market continues to rebound throughout 2013, 2014 could be a good year for the U.S. wood industry.

The United States furniture industry, in retreat since 1999, continued declining in 2011 as low-cost furniture imports and the global economic recession continue to erode the domestic industry market share. Employment in the domestic furniture industry has fallen more than 50% since 1999 (Fig. 3). The United States furniture industry stabilized in 2012 and have shown continued strength into 2013.

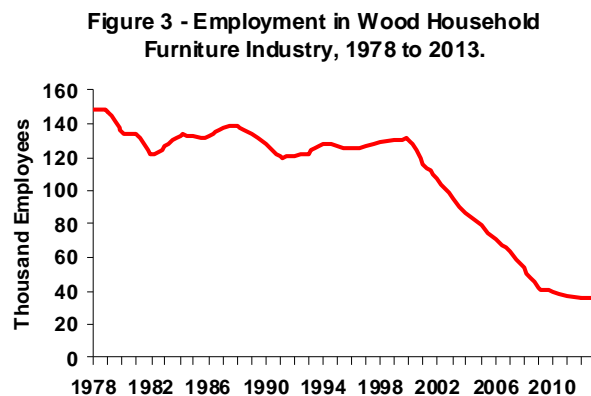

Sources of Information

1. Adair, Craig. 2012. Structural Panel & Engineered Wood Yearbook. APA Economics Report E175. Tacoma, WA: APA – The Engineered Wood Association. 80 p.
2. AF&PA. 2013. Paper, Paperboard, and Wood Pulp—Monthly Statistical Summary. Washington, D.C.: American Forest and Paper Association.
3. APA. 2013. Engineered Wood Statistics, Third Quarter 2013. Tacoma, WA: APA – The Engineered Wood Association. 9 p.
4. Board of Governors of the Federal Reserve System. 2013. Statistical Releases and Historical Data. Industrial Production and Capacity Utilization - G.17. Washington, D.C. <http://www.federalreserve.gov/releases/G17/Current/table1.htm> Accessed 11/06/2013.
5. Council of Economic Advisors. 2013. Economic Indicators. United States Government Printing Office [Monthly]. August 2011. Washington, D.C. [Source for Table 1]. <http://www.gpoaccess.gov/indicators/09augbro.html> Accessed 11/06/2012.
6. Composite Panel Association. 2013. Particleboard and medium-density fiberboard annual production and shipments. [Annual]. Silver Spring, MD: Composite Panel Association.

7. United Nations Economics Commission Europe and the Food Agriculture Organization. Forests Products Annual Market Review, 2010-2011. P. 90-94.
8. Federal Reserve Bank of Philadelphia. 2013. Economic Research, Survey of Professional Forecasters, Third Quarter 2013. <http://www.phil.frb.org/research-and-data/real-time-center/survey-of-professional-forecasters/> Accessed 11/06/2012.
9. Howard, James L. 2013. U.S. Timber Production, Trade, Consumption, and Price Statistics 1965-2011. Madison, WI: U.S. Department of Agriculture, Forest Service, Forest Products Laboratory. (In Process).
10. McKeever, David B.; Howard, James L. 2011. Solid wood timber products consumption in major end uses in the United States, 1950–2009; A Technical Document Supporting the Forest Service 2010 RPA Assessment. General Technical Report FPL-GTR-199. Madison, WI: U.S. Department of Agriculture, Forest Service, Forest Products Laboratory. 41 p.
11. National Association of Home Builders. Sept 2013a. Housing Economics. Washington, D.C.: http://www.nahb.org/showpage_details.aspx?showPageID=311§ionID=1163 Accessed 11/06/2012.
12. National Association of Home Builders. 2012b. Executive-Level Forecast. David Crowe. Washington, D.C.: National Association of Home Builders. Eye on the Economy. http://www.nahb.org/reference_list.aspx?sectionID=869&channelID=311 Accessed 11/06/2012.
13. U.S. Department of Labor, Bureau of Labor Statistics. 2013. Producer Prices and Price Indexes. [Monthly and annual]. Washington, D.C. <http://www.bls.gov/ppi>. Accessed 11/06/2012.
14. WWPA. 2012. Lumber Track. [Monthly]. November 2013 Portland, OR: Western Wood Products Association.
15. Anguilar, F.X., Song, N., and S. Shiftley. 2011. Consumption Trends and Public Policies Promoting Woody Biomass as an Energy Feedstock in the US Biomass & Bioenergy. 35: 3708-3718.
16. EPA, 2010. Prevention of Significant Deterioration and Title V Greenhouse Gas Tailoring Rule. Available at: www.epa.gov/nsr/documents/20100413final.pdf. Accessed 11/06/2012.
17. EPA. 2011a. Fact Sheet: Proposed Rule – Deferral for CO₂ emissions from bioenergy and other biogenic sources under the prevention of significant deterioration (PSD) and Title V programs. Available at: www.epa.gov/nsr/ghgdocs/biogenicfs.pdf. Accessed 11/06/2012.
18. EPA. 2011b. Guidance for determining best available control technology for reducing carbon dioxide emissions from bioenergy production. Office of Air and Radiation. March 2011. Available at: <http://www.epa.gov/nsr/ghgdocs/bioenergyguidance.pdf>. Accessed 11/06/2012.

Figure Captions

Figure 1—Solidwood timber products consumption market shares, 2006 - 2013.

Figure 2—Wholesale prices of forest products, 1997 - 2012.

Figure 3—Employment in wood household furniture industry, 1978 - 2012.