UNITED NATIONS



Economic and Social Council

Distr. GENERAL

TRANS/WP.29/2003/11 12 December 2002

ENGLISH

Original: ENGLISH AND FRENCH

ECONOMIC COMMISSION FOR EUROPE

INLAND TRANSPORT COMMITTEE

World Forum for Harmonization of Vehicle Regulations (WP.29)

(One-hundred-and-twenty-ninth session, 11-14 March 2003, agenda item 4.2.11.)

PROPOSAL FOR DRAFT SUPPLEMENT 3 TO REGULATION No. 98

(Headlamps with gas-discharge light sources)

Transmitted by the Working Party on Lighting and Light-Signalling (GRE)

<u>Note</u>: The text reproduced below was adopted by GRE at its forty-ninth session, and is transmitted for consideration to WP.29 and to AC.1. It is based on document TRANS/WP.29/GRE/2002/34, as amended (TRANS/WP.29/GRE/49, paras. 52 and 53).

This document is a working document circulated for discussion and comments. The use of this document for other purposes is the entire responsibility of the user.

Documents are also available via the INTERNET: http://www.unece.org/trans/main/welcwp29.htm

Annex 4, paragraph 1.1.1.1., add a new subparagraph (d) to read:

"(d) In the case of a passing beam designed to provide bend lighting with the addition of a light source, this light source shall be switched on for 1 minute, and switched off for 9 minutes during the activation of the passing beam only (see annex 4 - appendix 1)."

Insert new Annex 4 - appendix 1, to read:

"Annex 4 - Appendix 1

OVERVIEW OF OPERATIONAL PERIODS CONCERNING TEST FOR STABILITY OF PHOTOMETRIC PERFORMANCE

Abbreviations: P: passing beam lamp

D: driving beam lamp $(D_1 + D_2 \text{ means two driving beams})$


F: front fog lamp

— — — • means a cycle of 15 minutes off and 5 minutes lit.


means a cycle of 9 minutes off and 1 minutes lit

All following grouped headlamps and front fog lamps together with the added marking symbols are given as examples and are not exhaustive.

1. P or D or F (HC or HR or B)



2. P+F (HC B) or P+D (HCR)

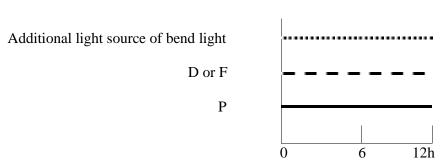

3. P+F (HC B/) or HC/B or P+D (HC/R)

TRANS/WP.29/ 2003/11 page 3

D or F
P
Additional light source of bend light
0 6 12h

,