



FPS **MOBILITY AND TRANSPORT**
DG **ROAD TRANSPORT AND ROAD SAFETY**



Changes (substantial) WP1 on the EGRSS
final report & proposal for Annex 1 & 3




Issue 25

1. The depictions of E, 11; and E, 16 signs do not follow the general characteristics of E signs . To this end, the Group recommends changing the depictions to be in line with the general characteristics of E signs (see subsection 1.2 of this document on amendments to Annex 1 and 3 of the Convention, section E, paragraphs II.9 and II.13). **The same goes for the E,15 sign, however, to avoid confusion with the additional panels H, 5 and the use of the symbol of the bus on the G, 18 sign, the E, 15 sign will be kept as is.**






Annex 1 & 3

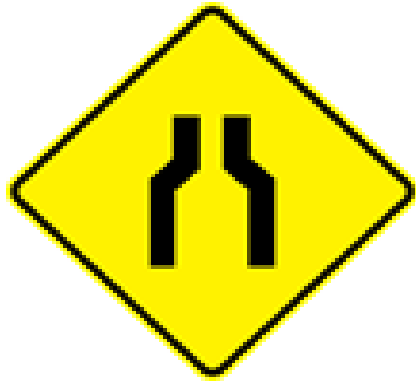

A, 4 a (A-04.1) gives warning that the carriageway ahead is narrower **on the left hand side and on the right hand side**. This sign shall not be used for indicating lane reduction ahead.



Annex 1 & 3

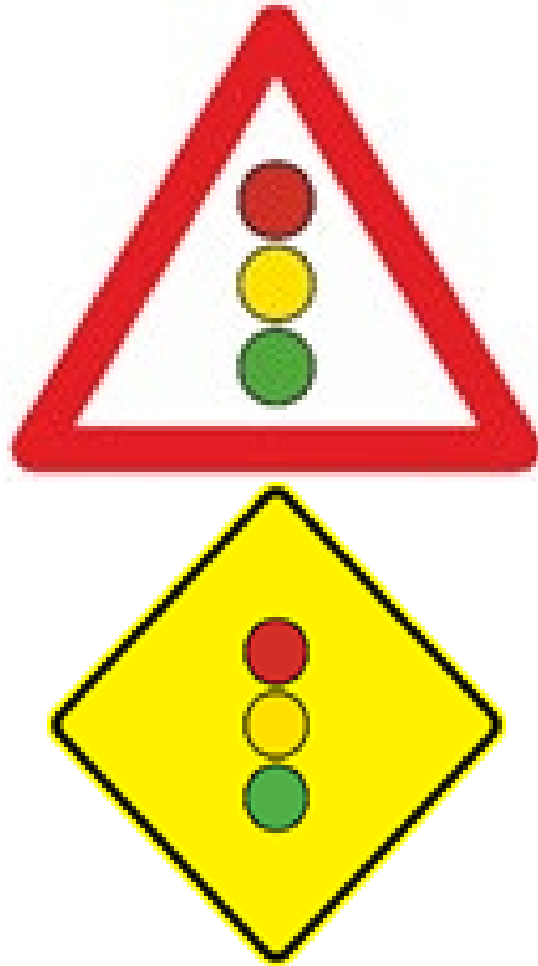

A, 17 (A-17.0) gives warning of a section of road on which traffic is regulated by three-colour traffic light signals. **The symbol shall be in the three colours of the traffic lights of which it gives warning. These three colours ~~symbol of traffic lights signals~~ shall be surrounded by a dark colour narrow strip.**

This sign shall only be used on road sections on which road users would not expect traffic light signals. **~~The symbol shall be in the three colours of the traffic lights of which it gives warning.~~**



Annex 1 & 3



These signs must have a short red arrow.





Annex 1 & 3



D, 1 a (D-01.2) notifies that the only direction in which vehicles are obliged to proceed is to the **forward** left.

D, 1 a (D-01.3) notifies that the only directions in which vehicles are obliged to proceed are **forward** left or straight



D, 1 a (D-01.6) notifies that the only direction in which vehicles are obliged to proceed is **forward**-to the right

D, 1 a (D-01.7) notifies that the only directions in which vehicles are obliged to proceed are **forward** to the right or straight.



Annex 1 & 3




E, 15

Sign E, 15 will be kept in its present form. As it cannot be mistaken with the advisory itinerary for buses, G, 18 (with the symbol of a bus).





Annex 1 & 3

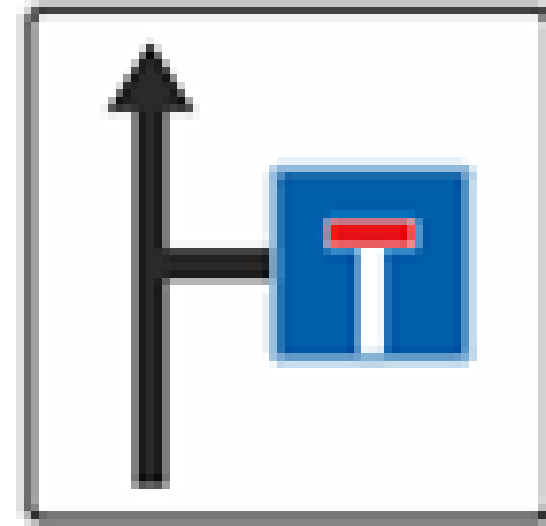

The sign with the white background is wrong and thus replaced by the correct sign on the left.



Annex 1 & 3



G, 18 (G-18.0) notifies **drivers of an advised itinerary for the type of road user indicated by the symbol displayed on the sign.**